


Arena Hazer™

Snapshot

OK on Dimmer	⊘
Outdoor OK	⊘
Sound Activated	⊘
DMX512	✓
Master/Slave	⊘
115V/230V Switch	⊘
Replaceable Fuse	✓
User Serviceable	⊘
Duty Cycle	⊘

USER MANUAL

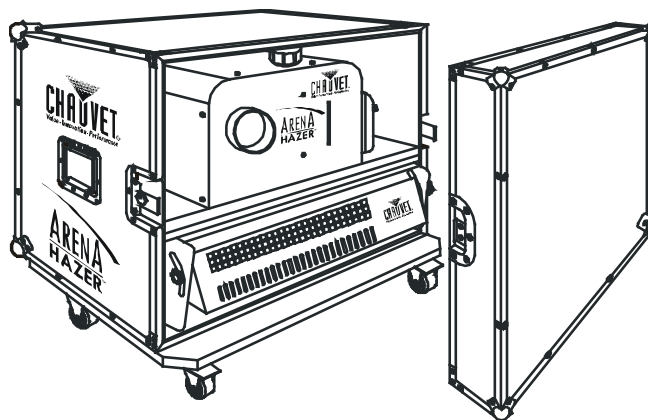

Chauvet, 3000 N 29th Ct, Hollywood, FL 33020 U.S.A.
(800) 762-1084 – (954) 929-1115
FAX (954) 929-5560
www.chauvetlighting.com

TABLE OF CONTENTS

1. BEFORE YOU BEGIN	3
WHAT IS INCLUDED.....	3
UNPACKING INSTRUCTIONS	3
AC POWER	3
CONTACT US.....	3
SAFETY INSTRUCTIONS.....	4
MAINTENANCE	5
STORAGE.....	5
2. INTRODUCTION	6
FEATURES.....	6
DMX CHANNEL SUMMARY.....	6
PRODUCT OVERVIEW	6
PRODUCT OVERVIEW CONTINUED	7
3. SETUP	8
FUSE REPLACEMENT	8
FIXTURE LINKING	8
Data Cabling	8
DMX Data Cable.....	8
Cable Connectors	9
3-Pin to 5-Pin Conversion Chart	9
SETTING UP A DMX SERIAL DATA LINK	9
4. OPERATING INSTRUCTIONS.....	10
OPERATION	10
Stand-Alone Mode with Timer Remote:	10
Stand-Alone Mode without Timer Remote:	10
DMX Mode	10
DMX CHANNEL VALUES	10
SETTING THE STARTING ADDRESS.....	11
DMX Quick Reference Chart	12
GENERAL TROUBLESHOOTING	13
TECHNICAL SUPPORT	14
5. APPENDIX.....	14
DMX PRIMER.....	14
GENERAL MAINTENANCE	15
RETURNS PROCEDURE.....	15
CLAIMS	15
TECHNICAL SPECIFICATIONS	16

1. BEFORE YOU BEGIN

What is included

- 1 x Arena Hazer™
- Road Case and Blower
- Timer Remote
- Power Cord
- Warranty Card
- User Manual

Unpacking Instructions

Immediately upon receiving a fixture, carefully unpack the carton, check the contents to ensure that all parts are present, and have been received in good condition. Notify the shipper immediately and retain packing material for inspection if any parts appear damaged from shipping or the carton itself shows signs of mishandling. Save the carton and all packing materials. In the event that a fixture must be returned to the factory, it is important that the fixture be returned in the original factory box and packing.

AC Power

To determine the power requirements for a particular product, see the label affixed to the back plate of the product or refer to the product's specifications chart. A product's listed current rating is its average current draw under normal conditions. All fixtures must be powered directly off a switched circuit and cannot be run off a rheostat (variable resistor) or dimmer circuit, even if the rheostat or dimmer channel is used solely for a 0% to 100% switch. Before applying power, check that the source voltage matches the product's requirement.

Warning!

This product was made to operate at a fixed voltage. There is no voltage select switch! Verify that the voltage requirement for this fixture matches the line voltage applied. All fixtures must be connected to circuits with a suitable Earth Ground.

Contact Us

World Wide

General Information

Chauvet Lighting
3000 North 29th Court
Hollywood, FL 33020
voice: 954.929.1115
fax: 954.929.5560
toll free: 800.762.1084

Technical Support

Chauvet Lighting
3000 North 29th Court
Hollywood, FL 33020
voice: 954.929.1115 **(Press 4)**
fax: 954.929.5560 **(Attention: Service)**

World Wide Web

www.chauvetlighting.com

Safety Instructions



Please read these instructions carefully, which includes important information about the installation, usage and maintenance of this product.

- Please keep this User Guide for future consultation. If you sell the unit to another user, be sure that they also receive this instruction booklet.
- Always make sure that you are connecting to the proper voltage, and that the line voltage you are connecting to is not higher than that stated on the decal or rear panel of the fixture.
- This product is intended for indoor use only!
- To prevent risk of fire or shock, do not expose unit to rain or moisture. Make sure there are no flammable materials close to the unit while operating.
- The unit must be installed in a location with adequate ventilation, at least 20in (50cm) from adjacent surfaces. Be sure that no ventilation slots are blocked.
- Always disconnect from power source before servicing or replacing lamp or fuse and be sure to replace with same lamp source.
- Maximum ambient temperature (Ta) is 95°F (35°C). Do not operate fixture at temperatures higher than this.
- In the event of a serious operating problem, stop using the unit immediately. Never try to repair the unit by yourself. Repairs carried out by unskilled people can lead to damage or malfunction. Please contact the nearest authorized technical assistance center. Always use the same type spare parts.
- Make sure the power cord is never crimped or damaged.
- Never disconnect the power cord by pulling or tugging on the cord.

Caution! *There are no user serviceable parts inside the unit. Do not open the housing or attempt any repairs yourself. In the unlikely event your unit may require service, please contact CHAUVET at: 954-929-1115.*

Caution! *You must only use Chauvet Fog fluid with this product. Although this is a haze machine, the haze is created using water-based fog fluid. If you use haze fluid, then the consistency of the haze will not be correct, and it may be potentially hazardous to the environment being used in.*

WARNING!

Note: All fog machines are prone to clogging due to the thick consistency of fog liquid and the high temperature at which it vaporizes. However, a properly maintained fog machine should provide years of reliable use. **Cleaning your fog machine regularly will help reduce costly replacement and repair charges.**

Maintenance

Do not allow the fog liquid to become contaminated. After every 40 hours of continuous operation, it is recommended to run a cleaning solution composed of 80% distilled water and 20% distilled vinegar through the system to prevent the accumulation of particulate matter in the heating element.

The recommended cleaning regimen is as follows:

1. Empty all fog liquid from the machine. Add cleaning solution to tank. Plug unit in and begin warm up.
2. Run the unit in a well-ventilated area until the tank is almost empty. Do not allow the pump to run dry.
3. Replace nozzle.
4. Cleaning is now complete. Refill with fog liquid. Run the machine briefly to clear any cleaning solution from the pump and heater.
5. Do not operate the fog machine without liquid at any time.

Storage

1. When storing run distilled water (not tap water) through the system as described in the cleaning regimen above. This will help avoid any particles condensing inside the pump or heater.
2. It is strongly recommended to test-run the machine on a monthly basis in order to achieve its best fogging condition. A test-run consists of warming up the machine followed by a few minutes of emission. After that, follow Step 1 under Storage

2. INTRODUCTION

Features

- 2 or 3-channel DMX-512 professional hazer
- Dual component system:
 - 2-channel DMX-512 professional hazer
 - 1-channel DMX-512 squirrel cage blower
- Adjustable haze output via DMX, wired remote or control panel on rear
- Adjustable fan speed via DMX or control panel on rear
- Adjustable blower speed via DMX or control panel on rear with variable angles


Additional Features

- Road case included with easy-refill system
- True continuous output
- 600-watt heater
- Output: 20,000cfm (haze)
- 1.4 quart tank capacity
- Wired multi-function remote included
- Water-based hazer (use only Chauvet Fog Fluid)



DMX Channel Summary

CHANNEL	FUNCTION
1	Haze
2	Fan
3	Blower

Product Overview

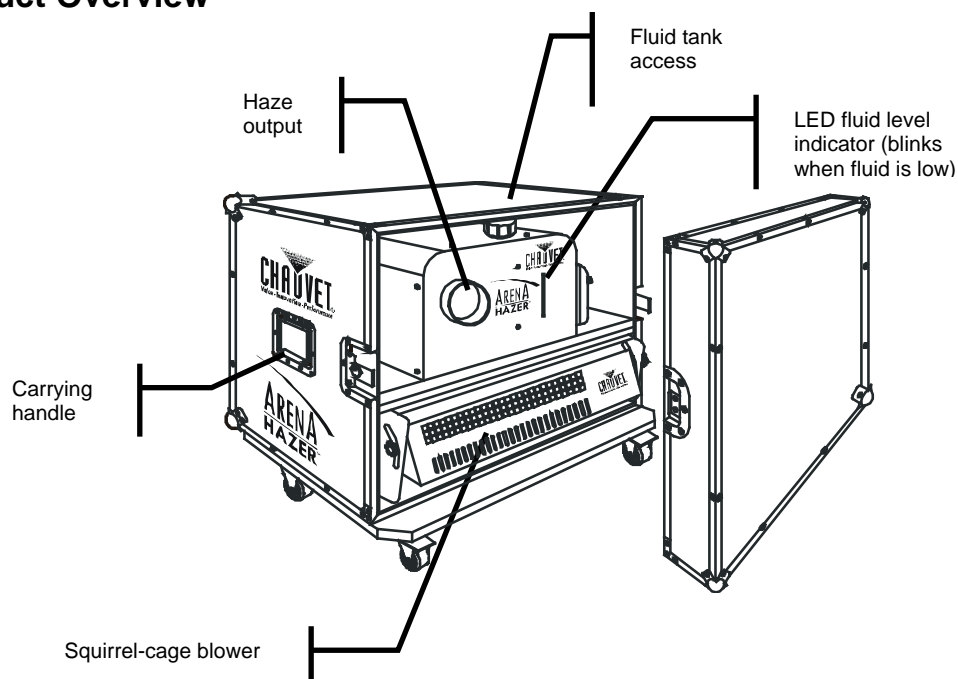

Product Overview Continued

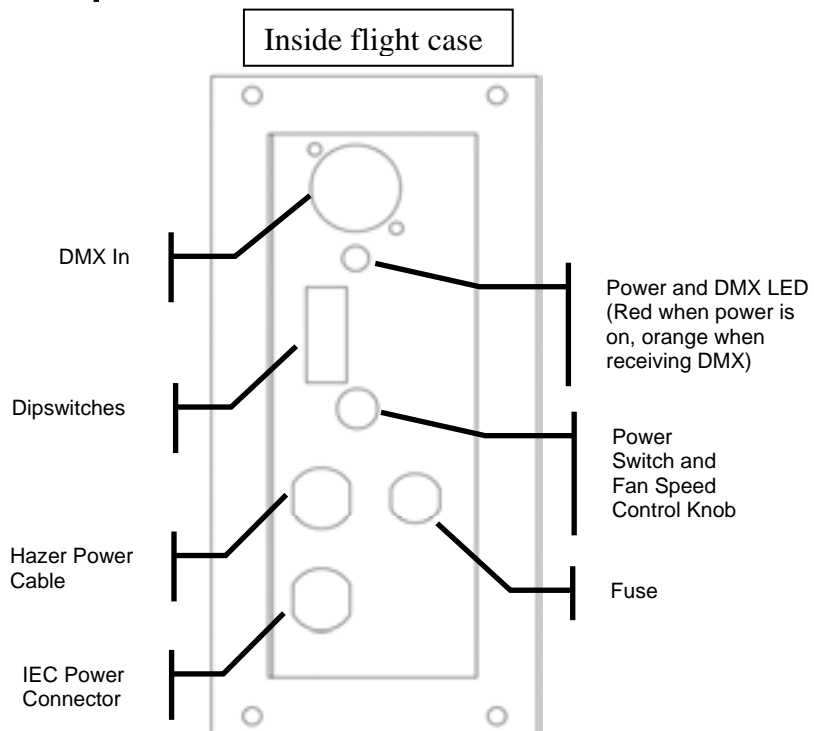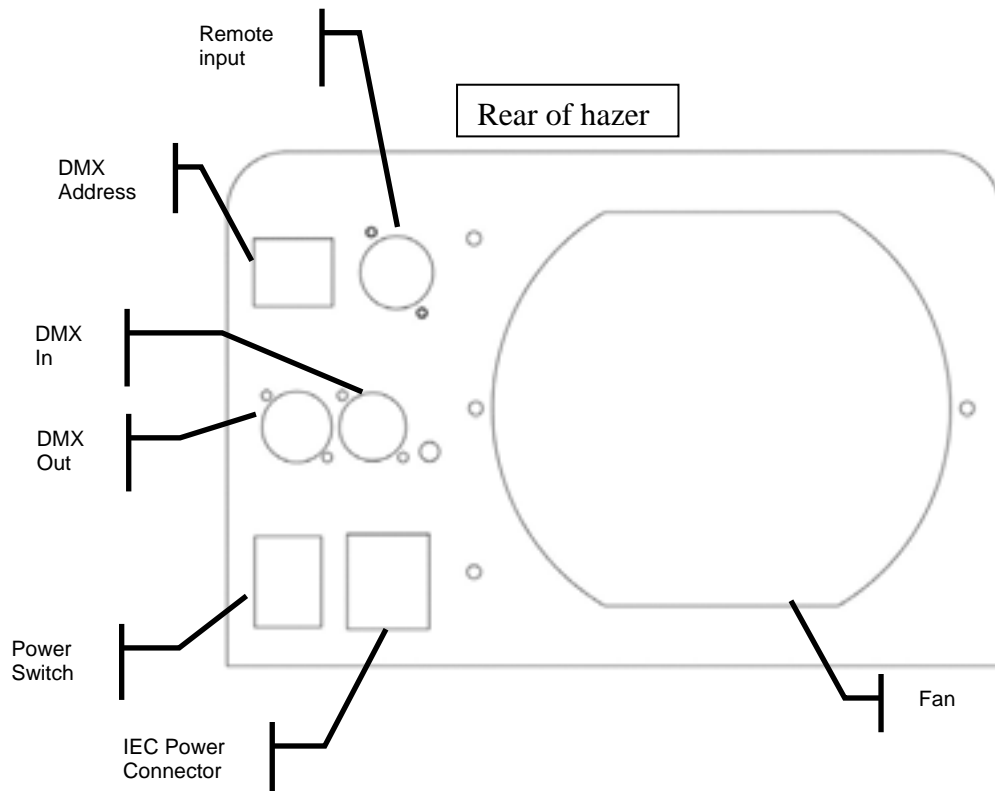

3. SETUP



Disconnect the power cord before replacing a fuse and always replace with the same type fuse.




Fuse Replacement

With a flat head screwdriver wedge the fuse holder out of its housing. Remove the damaged fuse from its holder and replace with exact same type fuse. Insert the fuse holder back in its place and reconnect power.

With a flat-head screwdriver, unscrew the fuse holder from its housing. Remove the damaged fuse from its holder and replace with exact same type fuse. Screw the fuse holder back in its place and reconnect power.

The fuse is located inside this compartment. Remove using a flat head screwdriver.



The fuse is located inside this compartment. Remove using a flat head screwdriver.



FUSE

Fixture Linking

You will need a serial data link to run light shows of one or more fixtures using a DMX-512 controller or to run synchronized shows on two or more fixtures set to a master/slave operating mode. The combined number of channels required by all the fixtures on a serial data link determines the number of fixtures the data link can support.

Important: Fixtures on a serial data link must be daisy chained in one single line. To comply with the EIA-485 standard no more than 32 devices should be connected on one data link. Connecting more than 32 fixtures on one serial data link without the use of a DMX optically-isolated splitter may result in deterioration of the digital DMX signal.

Maximum recommended serial data link distance: 500 meters (1640 ft.)

Maximum recommended number of fixtures on a serial data link: 32 fixtures

Data Cabling

To link fixtures together you must obtain data cables. You can purchase CHAUVET-certified DMX cables directly from a dealer/distributor or construct your own cable. If you choose to create your own cable please use data-grade cables that can carry a high quality signal and are less prone to electromagnetic interference.


DMX DATA CABLE

Use a Belden® 9841 or equivalent cable which meets the specifications for EIA RS-485 applications. Standard microphone cables cannot transmit DMX data reliably over long distances. The cable will have the following characteristics:

*2-conductor twisted pair plus a shield
Maximum capacitance between conductors – 30 pF/ft.
Maximum capacitance between conductor and shield – 55 pF/ft.
Maximum resistance of 20 ohms / 1000 ft.
Nominal impedance 100 – 140 ohms*

CABLE CONNECTORS

Cabling must have a male XLR connector on one end and a female XLR connector on the other end.

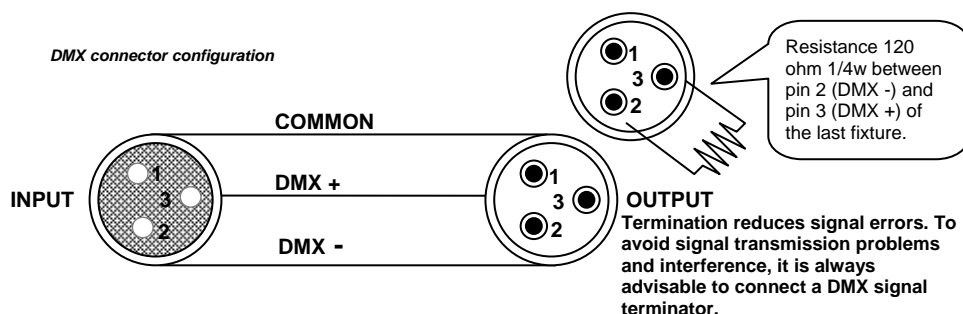

CAUTION Do not allow contact between the common and the fixture's chassis ground. Grounding the common can cause a ground loop, and your fixture may perform erratically. Test cables with an ohm meter to verify correct polarity and to make sure the pins are not grounded or shorted to the shield or each other.

3-PIN TO 5-PIN CONVERSION CHART

Note! If you use a controller with a 5 pin DMX output connector, you will need to use a 5 pin to 3 pin adapter. CHAUVET Model No: DMX5M, or DMX5F. The chart below details a proper cable conversion:

3 PIN TO 5 PIN CONVERSION CHART

Conductor	3 Pin Female (output)	5 Pin Male (Input)
Ground/Shield	Pin 1	Pin 1
Data (-) signal	Pin 2	Pin 2
Data (+) signal	Pin 3	Pin 3
Do not use		Do not use
Do not use		Do not use



Setting up a DMX Serial Data Link

1. Connect the (male) 3 pin connector side of the DMX cable to the output (female) 3 pin connector of the controller.
2. Connect the end of the cable coming from the controller which will have a (female) 3 pin connector to the input connector of the next fixture consisting of a (male) 3 pin connector.
3. Then, proceed to connect from the output as stated above to the input of the following fixture and so on.


CHAUVET Certified DMX Data Cables

Order Code	Description
DMX1.5	DMX Cable 1.5m/4.9ft
DMX4.5	DMX Cable 4.5m/14.8ft
DMX10	DMX Cable 10m/32.8ft

Universal DMX Controller

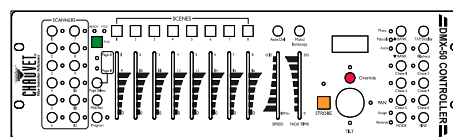

This drawing provides a general illustration of the DMX Input/Output panel of a lighting fixture.

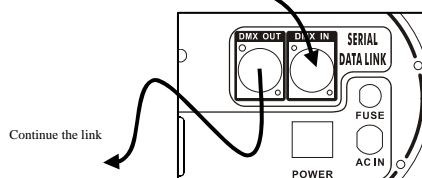

4. OPERATING INSTRUCTIONS

Operation

Stand-Alone Mode with Timer Remote:

This mode allows a single unit to run with the timer remote, and without a DMX controller.

- 1) Set the DMX address on the hazer to 000.
- 2) Adjust the fan speed, haze output, and timer interval using the timer remote.

Note: The timer remote does not control the output of the blower. Use the knob on the inner control panel by the dipswitches to adjust the blower speed.

Stand-Alone Mode without Timer Remote:

This mode allows a single unit to run without the timer remote, and without a DMX controller.

- 1) Set the DMX address of the hazer to 6XX, where the first X represents the desired fog output, and the second X represents the desired fan speed. 0 is off, and 9 is high.
- 2) Adjust the speed of the blower by turning the knob on the inner control panel by the dipswitches.

DMX Mode

This mode allows the unit to be controlled by any universal DMX controller. If you are unfamiliar with DMX, please read the DMX Primer on page 14.

Note: The blower has a DMX in but does not have a DMX out. In order to properly connect this fixture to DMX, you must have it be the end of the DMX link, or use a DMX splitter (Chauvet part number DMX-2X).

- 1) Set the DMX address of the hazer to the desired value using the numeric controls on the hazer.
- 2) Set the DMX address of the blower to the desired value using the dipswitches.

Note: The blower and the hazer fan can be set to the same DMX address to reduce the channel count of the Arena Hazer from 3 to 2.

DMX Channel Values

CHANNEL	VALUE	FUNCTION
1	000 ⇔ 010 011 ⇔ 255	Haze No output Haze output (low > high)
2	000 ⇔ 005 006 ⇔ 255	Fan Fan off Fan speed (low > high)
3	000 ⇔ 005 006 ⇔ 255	Blower Blower off Blower speed (low > high)

SETTING THE STARTING ADDRESS

This DMX mode enables the use of a universal DMX controller device. Each fixture requires a "start address" from 1 to 512. A fixture requiring one or more channels for control begins to read the data on the channel indicated by the start address. For example, a fixture that uses 6 DMX channels and was addressed to start on DMX channel 100, would read data from channels: 100, 101, 102, 103, 104, and 105. Choose start addresses so that the channels used do not overlap, and note the start address selected for future reference.

If this is your first time addressing a fixture using the DMX-512 control protocol, we suggest jumping to the Appendix Section and reading the heading "DMX Primer". It contains very useful information that will help you understand its use.

Set the start address using the group of DIP switches located usually on bottom of the fixture. Each dip switch has an associated value. Adding the value of each switch in the ON position will provide the start address. Figuring out which switches to toggle ON given a specific start address can be accomplished by determining which switch values will add up to the address value, and turning these switches on. Do so by doing the following:

- 1) Determine the largest value switch that is less than the start address. Turn this switch on.
- 2) Subtract the value of the switch you just turned on from the starting address number.
- 3) Determine the largest value switch that is less than the remainder from the previous subtraction. Turn this switch on.
- 4) Subtract the value of the switch you just turned on from the remainder of the previous subtraction.
- 5) Repeat steps three and four until you have a remainder of zero.

EXAMPLE STARTING ADDRESS

Address 10 Switch # 4 = 8 Switch # 2 = 2 Total = 10	<div> <div>2561286432168421</div> <div>987654321</div> <div> </div> <div>ON OFF</div> </div>																				
Address 24 Switch # 5 = 16 Switch # 4 = 8 Total = 24	<div> <div>2561286432168421</div> <div>987654321</div> <div> </div> <div>ON OFF</div> </div>																				
Resolving address using simple math. Address 233	<div> <div> 233 – (128) = 105, Turn ON Dip # 8 105 – (64) = 41, Turn ON Dip # 7 41 – (32) = 9, Turn ON Dip # 6 9 – (8) = 1, Turn ON Dip # 4 1 – (1) = 0, Turn ON Dip # 1 </div> <table> <thead> <tr> <th>DIPSWITCH</th><th>(DMX VALUE)</th></tr> </thead> <tbody> <tr><td>1</td><td>1</td></tr> <tr><td>2</td><td>2</td></tr> <tr><td>3</td><td>4</td></tr> <tr><td>4</td><td>8</td></tr> <tr><td>5</td><td>16</td></tr> <tr><td>6</td><td>32</td></tr> <tr><td>7</td><td>64</td></tr> <tr><td>8</td><td>128</td></tr> <tr><td>9</td><td>256</td></tr> </tbody> </table> </div>	DIPSWITCH	(DMX VALUE)	1	1	2	2	3	4	4	8	5	16	6	32	7	64	8	128	9	256
DIPSWITCH	(DMX VALUE)																				
1	1																				
2	2																				
3	4																				
4	8																				
5	16																				
6	32																				
7	64																				
8	128																				
9	256																				

DMX QUICK REFERENCE CHART

DMX Address Quick Reference Chart																	
Dip Switch Position																	
DMX DIP SWITCH SET 0=OFF 1=ON X=OFF or ON		#9	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1
		#8	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1
		#7	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1
		#6	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0
#1	#2	#3	#4	#5													
0	0	0	0	0		32	64	96	128	160	192	224	256	288	320	352	384
1	0	0	0	0		1	33	65	97	129	161	193	225	257	289	321	353
0	1	0	0	0		2	34	66	98	130	162	194	226	258	290	322	354
1	1	0	0	0		3	35	67	99	131	163	195	227	259	291	323	355
0	0	1	0	0		4	36	68	100	132	164	196	228	260	292	324	356
1	0	1	0	0		5	37	69	101	133	165	197	229	261	293	325	357
0	1	1	0	0		6	38	70	102	134	166	198	230	262	294	326	358
1	1	1	0	0		7	39	71	103	135	167	199	231	263	295	327	359
0	0	0	1	0		8	40	72	104	136	168	200	232	264	296	328	360
1	0	0	1	0		9	41	73	105	137	169	201	233	265	297	329	361
0	1	0	1	0		10	42	74	106	138	170	202	234	266	298	330	362
1	1	0	1	0		11	43	75	107	139	171	203	235	267	299	331	363
0	0	1	1	0		12	44	76	108	140	172	204	236	268	300	332	364
1	0	1	1	0		13	45	77	109	141	173	205	237	269	301	333	365
0	1	1	1	0		14	46	78	110	142	174	206	238	270	302	334	366
1	1	1	1	0		15	47	79	111	143	175	207	239	271	303	335	367
0	0	0	0	1		16	48	80	112	144	176	208	240	272	304	336	368
1	0	0	0	1		17	49	81	113	145	177	209	241	273	305	337	369
0	1	0	0	1		18	50	82	114	146	178	210	242	274	306	338	370
1	1	0	0	1		19	51	83	115	147	179	211	243	275	307	339	371
0	0	1	0	1		20	52	84	116	148	180	212	244	276	308	340	372
1	0	1	0	1		21	53	85	117	149	181	213	245	277	309	341	373
0	1	1	0	1		22	54	86	118	150	182	214	246	278	310	342	374
1	1	1	0	1		23	55	87	119	151	183	215	247	279	311	343	375
0	0	0	1	1		24	56	88	120	152	184	216	248	280	312	344	376
1	0	0	1	1		25	57	89	121	153	185	217	249	281	313	345	377
0	1	0	1	1		26	58	90	122	154	186	218	250	282	314	346	378
1	1	0	1	1		27	59	91	123	155	187	219	251	283	315	347	379
0	0	1	1	1		28	60	92	124	156	188	220	252	284	316	348	380
1	0	1	1	1		29	61	93	125	157	189	221	253	285	317	349	381
0	1	1	1	1		30	62	94	126	158	190	222	254	286	318	350	382
1	1	1	1	1		31	63	95	127	159	191	223	255	287	319	351	383

Dip Switch Position

DMX Address

General Troubleshooting

Symptom	Solution(s)	Applies to			
		Lights	Foggers & Snow	Controllers	Dimmers & Chaser
Auto shut off	Check fan thermal switch reset	✓			
Beam is very dim or not bright	Clean optical system or replace lamp Check 220/110v switch for proper setting	✓			
Breaker/Fuse keeps blowing	Check total load placed on device				✓
Chase is too slow	Check users manual for speed adjustment	✓		✓	✓
Device has no power	Check for power on Mains. Check device's fuse. (internal and/or external)	✓		✓	✓
Fixture is not responding	Check DMX Dip switch settings for correct addressing Check DMX cables Check polarity switch settings	✓			
Fixture is on but there is no movement to the audio	Make sure you have the correct audio mode on the control switches. If audio provided via ¼" jack, make sure a live audio signal exists Adjust sound sensitivity knob	✓		✓	✓
Lamps cuts off sporadically	Possible bad lamp or fixture is overheating. Lamp may be at end of its life.	✓			
Light will not come on after power failure	Some discharge lamps require a cooling off period before the electronics in the fixture can kick start it again, wait 5 to 10 minutes before powering up	✓			
Loss of signal	Use only DMX cables Install terminator Note: Keep DMX cables separated from power cables or black lights.	✓	✓	✓	✓
Moves slow	Check 220/110v switch for proper setting	✓			
No flash	Re-install bulb, may have shifted in shipping	✓			
No laser output	Bounce mirror motor may have shifted during shipping, readjust	✓			
No light output	Check slip ring & brushes for contact Install bulb Call service technician	✓			
Relay will not work	Check reset switch Check cable connections				✓
Remote does not work	Make sure connector is firmly connected to device	✓	✓		
Stand alone mode	All Chauvet lighting fixtures featuring stand-alone functions do not require additional settings, simply power the fixture and it will automatically enter into this mode	✓			

If you still have a problem after trying the above solutions, please contact CHAUVET Technical Support at the location on the next page.

Technical Support

Address: Service Dept.
3000 N 29th Ct, Hollywood, FL 33020 (U.S.A.)
Support (Email): tech@chauvetlighting.com
Telephone: (954) 929-1115 - (Press 4)
Fax: (954) 929-5560 - (Attention: Service)
Website: <http://www.chauvetlighting.com>

5. APPENDIX

DMX Primer

There are 512 channels in a DMX-512 connection. Channels may be assigned in any manner. A fixture capable of receiving DMX 512 will require one or a number of sequential channels. The user must assign a starting address on the fixture that indicates the first channel reserved in the controller. There are many different types of DMX controllable fixtures and they all may vary in the total number of channels required. Choosing a start address should be planned in advance. Channels should never overlap. If they do, this will result in erratic operation of the fixtures whose starting address is set incorrectly. You can however, control multiple fixtures of the same type using the same starting address as long as the intended result is that of unison movement or operation. In other words, the fixtures will be slaved together and all respond exactly the same.

DMX fixtures are designed to receive data through a serial Daisy Chain. A Daisy Chain connection is where the DATA OUT of one fixture connects to the DATA IN of the next fixture. The order in which the fixtures are connected is not important and has no effect on how a controller communicates to each fixture. Use an order that provides for the easiest and most direct cabling. Connect fixtures using shielded two conductor twisted pair cable with three pin XLR male to female connectors. The shield connection is pin 1, while pin 2 is Data Negative (S-) and pin 3 is Data positive (S+). CHAUVET carries 3-pin XLR DMX compliant cables, DMX-10 (33'), DMX-4.5 (15') and DMX-1.5 (5')

General Maintenance

To maintain optimum performance and minimize wear fixtures should be cleaned frequently. Usage and environment are contributing factors in determining frequency. As a general rule, fixtures should be cleaned at least twice a month. Dust build up reduces light output performance and can cause overheating. This can lead to reduced lamp life and increased mechanical wear. Be sure to power off fixture before conducting maintenance.

Unplug fixture from power. Use a vacuum or air compressor and a soft brush to remove dust collected on external vents and internal components. Clean all glass when the fixture is cold with a mild solution of glass cleaner or Isopropyl Alcohol and a soft lint free cotton cloth or lens tissue. Apply solution to the cloth or tissue and drag dirt and grime to the outside of the lens. Gently polish optical surfaces until they are free of haze and lint.

The cleaning of internal and external optical lenses and/or mirrors must be carried out periodically to optimize light output. Cleaning frequency depends on the environment in which the fixture operates: damp, smoky or particularly dirty surrounding can cause greater accumulation of dirt on the unit's optics. Clean with soft cloth using normal glass cleaning fluid. - Always dry the parts carefully. - Clean the external optics at least every 20 days. Clean the internal optics at least every 30/60 days.

Returns Procedure

Returned merchandise must be sent prepaid and in the original packing, call tags will not be issued. Package must be clearly labeled with a Return Merchandise Authorization Number (RMA #). Products returned without an RMA # will be refused. Call CHAUVET and request RMA # prior to shipping the fixture. Be prepared to provide the model number, serial number and a brief description of the cause for the return. Be sure to properly pack fixture, any shipping damage resulting from inadequate packaging is the customer's responsibility. CHAUVET reserves the right to use its own discretion to repair or replace product(s). As a suggestion, proper UPS packing or double-boxing is always a safe method to use.

Note: If you are given an RMA #, please include the following information on a piece of paper inside the box:

- 1) Your name
- 2) Your address
- 3) Your phone number
- 4) The RMA #
- 5) A brief description of the symptoms

Claims

Damage incurred in shipping is the responsibility of the shipper; therefore the damage must be reported to the carrier upon receipt of merchandise. It is the customer's responsibility to notify and submit claims with the shipper in the event that a fixture is damaged due to shipping. Any other claim for items such as missing component/part, damage not related to shipping, and concealed damage, must be made within seven (7) days of receiving merchandise.

Technical Specifications

WEIGHT & DIMENSIONS

Length..... 20.9 in (532 mm)
Width 18.1 in (460 mm)
Height 17 in (432 mm)
Weight 77 lbs (35 kg)
Tank capacity 1.4 qt (1.3 L)

POWER

Fixed voltage 110V 60 Hz or 230V 50 Hz
Power consumption 752W (6.44A at 120V) Max
Inrush power..... 752W (6.44A at 120V)
Power factor 0.97

PERFORMANCE

Output 20,000 cfm (haze)
Heater 600W

THERMAL

Maximum ambient temperature 104°F (40°C)

FUSE

Hazer 20mm Glass 7A 250V Slow Blow
Internal control panel 20mm Glass 7A 250V Slow Blow

CONTROL & PROGRAMMING

Data input locking 3-pin XLR male socket
Data output locking 3-pin XLR female socket
Data pin configuration pin 1 shield, pin 2 (-), pin 3 (+)
Protocols DMX-512 USITT
DMX Channels 2 or 3

ORDERING INFORMATION

Arena Hazer Arena Hazer
Fog Fluid (1 gallon) FJU

WARRANTY INFORMATION

Warranty 2-year limited warranty