

DESCRIPTION

New construction housing for Quiet Ceiling square trimless fixtures. For 12V MR16 71 watts max.

For new construction applications. Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #	Туре
Project	
Comments	Date
Prepared by	

SPECIFICATION FEATURES

A...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable trimless mud-ring can accommodate 1/2", 5/8", 3/4" & 1" ceiling thickness.

B...System Protection:

Thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.

C...Electrical

Integral j-box and electronic or magnetic low voltage transformer . 120V or 277V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts (six knockouts when magnetic xfmr. is specified)


D...Lamp

12V MR16 71 watts max. (not included) Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.


E...Mounting

Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively. Perforated flaps for secure drywall installation.

Ceiling Cut-Out: 5.50" sq.

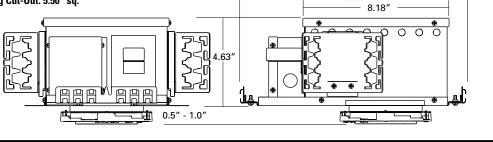

12.00"



7.25"

9.75

⊗

13.00"

4.63"

Ceiling

Cut-Out

5.50"dia.



QUIET CEILING TRIMLESS

QCT901 New Construction Housing for Square Trim

FOR 12V MR16 71W max.



ORDERING INFORMATION

