

Sample Number: 1220-2TR-44-CFL/4/57 + T5/1/40-120V-SN-REM-46

1220-2TR & TTR SERIES

The 1220 Deep Bowl Direct/Indirect High Performance Luminous Pendant features a Traditional Trim Ring (TTR) or a Double Trim Ring (2TR) and is available in three diameters with multiple mounting options.

Series	Size	Lamp	Lamp (Bowl)
Series 1220-2TR	26"	CFL/3/27 ^{1,2} CFL/3/120 ² CFL/6/27 ^{1,2} HAL/4/150 ³	T5/1/22 ^{1,2,7}
Series 1220-TTR	36"	CFL/3/32 ¹ CFL/4/27 ³ CFL/6/39 ² MH/1/175 ³	T5/1/40 ^{3,7}
	44"	CFL/3/39 ² CFL/4/39 ³ CFL/6/40 ² MH/1/250 ³	
		CFL/3/40 ² CFL/4/40 ³ CFL/6/50 ² MH/1/400 ³	
		CFL/3/42 ^{1,2} CFL/4/50 ³ CFL/6/55 ² MH/3/39 ^{1,2}	
		CFL/3/50 ² CFL/4/55 ³ CFL/8/27 ³ MH/3/70 ^{1,2}	
		CFL/3/55 ² CFL/4/57 ³ CFL/8/39 ³ MH/3/150 ²	
		CFL/3/57 ² CFL/4/60 ³ CFL/8/40 ³ MH/4/70 ³	
		CFL/3/60 ^{1,2} CFL/4/70 ³ CFL/8/50 ³ MH/4/150 ³	
		CFL/3/70 ² CFL/4/85 ³ CFL/8/55 ³	
		CFL/3/85 ² CFL/4/120 ³ HAL/3/150 ^{1,2}	

Voltage	Finish	Pattern ⁵	Stem and Canopy Finish ⁵	Options	Suspension Height
120V	Standard - MW	COL = Coral	Standard - MW	1SAC DM ⁶	30" (OA) - 26" dia.
277V	Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCL, SCP, SN, SNL	SHL = Seashell	Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCP, SN	3S FF QP ³ REM SJCAC SCA SJWAC SSW DP ^{1,2} FB DL	36" (OA) - 36" dia. 46" (OA) - 44" dia. Or Specify
347V	Custom Decorative Metals CLR, CBT, SPE, SGE, BRS, CPR, BPL, SGN, CMP, CLE, IDO, RBE, PWR	SMT = Smooth			

- Notes:
1. Available in 26".
 2. Available in 36".
 3. Available in 44".
 4. Available in 26" Only.
 5. Available with Custom Decorative Metal Finish only.
 6. Not available in 27V, 60W, 85W and 120V.
 7. Not offered on 175, 250 & 400W Metal Halide.

MATERIAL
Painted and plated cold rolled steel or natural aluminum pan with a matte acrylic bowl. Supplied with a single stem assembly.


INSTALLATION
Supplied with either a circle strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Internal safety cable provided.

LAMP/SOCKET

26" - Three (3) or six (6) 27W (2G11) 4-pin high lumen CFL lamps, three (3) 32W (GX24q-3) or 42W (GX24q-4) 4-pin triple, three (3) 39W or 70W T6 CDM metal halide lamps or three (3) 150W T4 (DC Bay) clear linear halogen lamps. One (1) 22W (2GX13) T5 circular lamp (bowl illumination).
36" - Three (3) or six (6) 27W, 39W, 40W, 50W, or 55W (2G11) 4-pin high lumen CFL lamps, three (3) 42W (GX24q-4) 4-pin triple or 57W (GX24q-5), 60W (2G8), 70W (GX24q-6), 85W (2G8) or 120W (2G8) 4-pin triple HO CFL lamps or three (3) 39W, 70W or 150W T6 CDM metal halide lamps or three (3) 150W T4 (DC Bay) clear linear halogen lamps. One (1) 40W (2GX13) T5 circular lamp (bowl illumination).
44" - Four (4) or (8) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps, four (4) 57W (GX24q-5), 70W (GX24q-6), 4-pin triple HO CFL lamps, four (4) 70W or 150W T6 CDM metal halide lamps, one (1) 175W (ED-17), 250W (ED-28) or 400W (ED-28) metal halide lamp or four (4) 150W T4 (DC Bay) clear linear halogen lamps. One (1) 40W (2GX13) T5 circular lamp (bowl illumination). CFL sockets injection molded plastic. Metal halide socket ceramic pulse-rated, 4KV. Lamps furnished by others.

BALLAST
Integral CFL electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry. Metal Halide ballast is electronic HPF, multi-volt (120V/277V) for the specified lamp wattage. 347V MH ballast - Contact factory.

FINISH AND OPTIONS
See page 1020 for finish details and options.

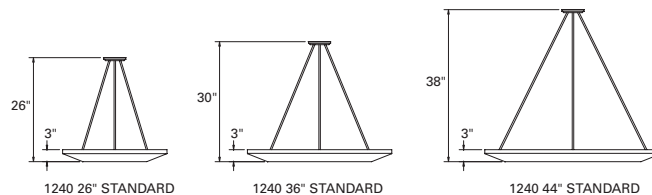

Sample Number: 1240-OBG-44-CFL/8/55-120V-SAL-DM-38

1240 SERIES

The 1240 Direct/Indirect or Indirect Tapered High Performance Pendant features a 3" Ht. Solid (S), Open (O), or Frosted Glass (OBG) center design and is available in three diameters with multiple mounting options.

Series	Type	Size	Lamp	Voltage
Series 1240	S = Solid	26"	CFL/3/27 ^{1,2} CFL/6/27 ^{1,2}	120V
	OB = Open	36"	CFL/3/39 ² CFL/6/39 ² 277V	
	OBG = Open w/ Frosted Glass Lens	44"	CFL/3/40 ² CFL/6/40 ² 347V	
			CFL/3/50 ² CFL/6/50 ²	
			CFL/3/55 ² CFL/6/55 ²	
			CFL/4/27 ³ CFL/8/27 ³	
			CFL/4/39 ³ CFL/8/39 ³	
			CFL/4/40 ³ CFL/8/40 ³	
			CFL/4/50 ³ CFL/8/50 ³	
			CFL/4/55 ³ CFL/8/55 ³	

MATERIAL
Solid (S) or Open (OB) painted and plated cold rolled steel or natural aluminum pan. Frosted Glass Lense (OBG).

BALLAST
Integral CFL electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with either a circle strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided. Refer to specification sheet for additional mounting requirements.

LAMP/SOCKET
26" - Three (3) or six (6) 27W (2G11) high lumen CFL lamps.
36" - Three (3) or six (6) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps.
44" - Four (4) or eight (8) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps. CFL socket injection molded plastic. Lamps furnished by others.

FINISH AND OPTIONS
See page 1020 for finish details and options.

Finish	Pattern ⁵	Stem and Canopy Finish ⁵	Options	Suspension Height
Standard - MW	COL = Coral	Standard - MW	1S ⁶	26" (OA) - 26" dia.
Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCL, SCP, SN, SNL	SHL = Seashell	Premium - CC, NA, OBRS, PB ⁴ , PC ⁴ , PCP ⁴ , PN ⁴ , SAL, SB, SC, SCP, SN	1SAC 3S ⁶ SJCAC SJWAC DL DM ⁷ FF REM SCA SSW	30" (OA) - 36" dia. 38" (OA) - 44" dia. Or Specify
Custom Decorative Metals CLR, CBT, SPE, SGE, BRS, CPR, BPL, SGN, CMP, CLE, IDO, RBE, PWR	SMT = Smooth			

- Notes:
1. Available in 26".
 2. Available in 36".
 3. Available in 44".
 4. Available in 26" Only.
 5. Available with Custom Decorative Metal Finish only.
 6. Available in Solid Type only.
 7. Not available in 27V.