

DESCRIPTION

240 "Craftsman" Luminous Flared Square features direct/indirect illumination with a downlight.

SPECIFICATION FEATURES

Material

Painted and plated cold rolled steel, aluminum, brass or solid bronze trim with matte white acrylic panels. 1/2" Aluminum cube louver.
Four Stem (Standard): Four 1/2" stems with a standard height of 18" (OA), 14" (OA) minimum. Maximum overall hang height for a one piece assembly is 5' (OA). Contact the factory for lengths over 5' (OA). Specify SCA for sloped ceilings up to 45°.

Finish

Standard: Matte White (MW). Premium: Satin Chrome (SC), Polished Chrome (PC), Satin Brass (SB), Polished Brass (PB), Oxidized Brass (OBRS), Oxidized Copper (OCP), Gun Metal (GNM), Natural Aluminum (NA) (Sustainable Design), Lacquered Satin Aluminum (SAL), Satin Copper (SCP), Polished Copper (PCP), Satin Nickel (SN), Polished Nickel (PN), Lacquered Satin Chrome (SCL), Lacquered Satin Nickel (SNL) or Custom Color (CC). Note: The cube cell louver will match the specified finish.

Optics

Refer to

www.shaperlighting.com for complete photometrics.

Ballast

Integral electronic CFL HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage. Metal halide ballasts are electronic HPF, multi-volt for the specific lamp wattage.

Lamp/Socket

Four (4) 26W or 32W (G24q-3) 4-pin quad CFL lamps or four (4) 60W frosted T-10 incandescent lamps. Downlight: One (1) 50WPAR20H, 75WPAR30H (Long neck), 20WPAR20MH, 20WPAR30LMH, 39WPAR20MH, 39WPAR30LMH, or 70WPAR30LMH. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. MH socket fired ceramic pulse-rated 4KV. Lamps furnished by others.

Installation

Supplied with either strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided. Adjustable lamp socket.

Catalog #		Type
Project		
Comments		Date
Prepared by		

Options

Hand Painted Faux Alabaster Panels (FP), Hand Painted Faux Linen Panels (LNP), Sloped Ceiling Adaptor - Specify up to 45° (SCA), CFL Dimming Ballast - Contact the factory for ballast options (DM). Damp Location (DL): All painted finishes, Lacquered Satin Chrome (SCL) and Lacquered Satin Nickel (SNL) finishes only. MRI Applications (INC only) - Contact Factory. Integral Emergency Battery - for 2-lamps (IEM-1), for 4-lamps (IEM-2). Energy Star Rating - Contact Factory.

Labels

U.L. and C.U.L. approved for indoor and damp location. See options for damp location finishing requirements.

Modifications

Shaper's skilled craftspeople with their depth of experience offer the designer the flexibility to modify standard surface luminaires for project specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors, or decorative detailing.



240 SERIES

Surface Luminaire
"Craftsman" Luminous
Flared Square



ORDERING INFORMATION

Sample Number: 240-CFL/4/32-PARH/1/75-120V-OBRS

Series	Lamp	DL Lamp Options	Voltage	Finish	Options
240 = Craftsman Surface Luminous Flared Square Luminaire	CFL/4 (26/32W- Quad) INC/4/60	PARH/1/75 PARMH/1/20 PARMH/1/39 PARMH/1/70	120V 277V ³ 347V ²	<u>Standard</u> MW=Matte White <u>Premium</u> CC=Custom Color GNM=Gun Metal NA= Natural Aluminum PB=Polished Brass PC=Polished Chrome PCP=Polished Copper PN=Polished Nickel OBRS=Oxidized Brass OCP=Oxidized Copper SB=Satin Brass SC=Satin Chrome SCP=Satin Copper SN=Satin Nickel SCL=Lacquered Satin Chrome SNL=Lacquered Satin Nickel SAL=Lacquered Satin Aluminum	SCA=Sloped Ceiling Adaptor DL=Damp Location ¹ DM=CFL Dimming Ballast ² FP=Hand-Painted Faux Alabaster Panels LNP=Hand Painted Faux Linen Panels IEM1=Integral Emergency Battery (for 2 lamps) IEM2=Integral Emergency Battery (for 4 lamps)

Notes:

- Interior applications only.
- Available with CFL only.
- Available with CFL & MH only.

SUSTAINABLE DESIGN

Shaper has a long-standing history of offering environmentally-friendly fixtures. The copper and bronze alloys used in our exterior luminaires feature up to 98% recycled content, contribute less undesirable air emissions compared to painted aluminum and are easy to recycle.





MAGNETIC RESONANCE IMAGING (MRI)

Lighting fixtures for MRI facilities are specialized and unique, requiring non-ferrous construction. Fluorescent fixtures cannot be used due to the ferrous parts in ballasts and lampholders. Modified incandescent fixtures meet the requirements.

ENERGY STAR

Shaper now offers a wide variety of fixtures that can be provided with an Energy Star Rating.

Refer to the Icon Legend
Link on shaperlighting.com.

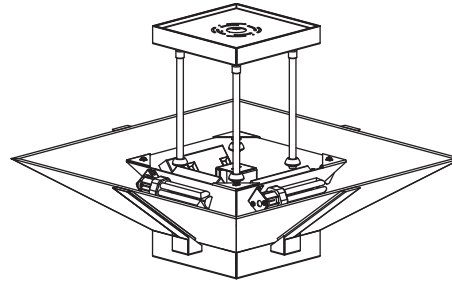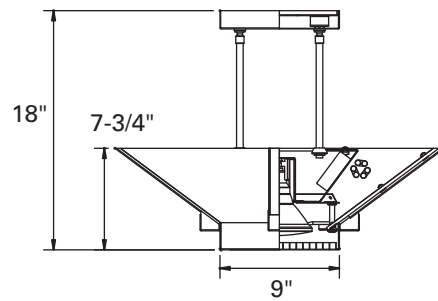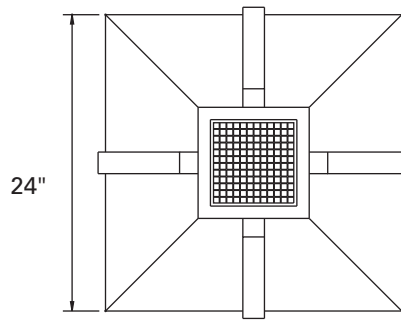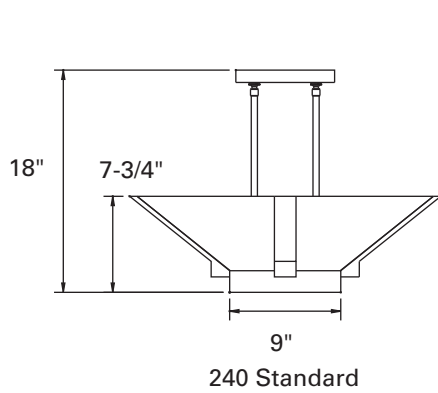

COMPANION PRODUCTS



271



440




472



607



640



666-WP



672-WP