

ADVR-2200M

Universal Hybrid Analog-Digital Voltage Regulator Operation Manual



Hybrid Universal Analog / Digital 1 or 3 Phase 3.5 Amp Self Excited,
Shunt, Auxiliary Winding, Harmonic Power or PMG Automatic
Voltage Regulator Easy to Set-Up and Program Install Manual



固也泰電子工業有限公司
KUTAI ELECTRONICS INDUSTRY CO., LTD.



Headquarters : No.3, Lane 201, Chien Fu St., Chyan Jenn Dist., Kaohsiung, TAIWAN
Tel : + 886-7-8121771 **Fax** : + 886-7-8121775 **URL** : <http://www.kutai.com.tw>

SECTION 1 : SPECIFICATION

Sensing Input (E1, E2, E3) RMS Reading

Voltage	220 – 600 Vac, 1 phase / 3 phase DIP switch setting 180 – 280 Vac @ 220 Vac 330 – 515 Vac @ 380 / 440 Vac 420 – 660 Vac @ 480 / 600 Vac
Frequency	50/60 Hz, DIP switch setting

Power Input (P1, P2)

Voltage	60 – 300 Vac, 1 phase 2 wire
Frequency	50 – 500 Hz

Auxiliary Input (P3, P4)

Voltage	40 – 300 Vac, 1 phase 2 wire
Frequency	40 – 500 Hz

Excitation Output (F+, F-)

110V 1 phase	Continuous	63 Vdc	3.5A
		Max. 90 Vdc	7A for 10 secs.
220V 1 phase	Continuous	125 Vdc	3.5A
		Max. 180 Vdc	7A for 10 secs.
220V 3 phase	Continuous	150 Vdc	3.5A
		Max. 215 Vdc	7A for 10 secs.
Resistance	≥ 13 ohms @ power input 110 Vac ≥ 25 ohms @ power input 220 Vac Max. 100 ohms		
Fuse Spec.	Slow blow 5 x 20 mm S505-5A		

External Voltage Adjustment (VR1, VR2)

Max. +/- 5%	@ 500 ohms 1 watt potentiometer
Max. +/- 10%	@ 1K ohm 1 watt potentiometer

Voltage Regulation

Less than +/- 0.5% (with 4% engine governing)

Build Up Voltage

5 Vac 25 Hz residual volts at power input terminal

Soft Start Ramp Time

4 sec. +/- 10%

Response Time

Less than 20 milliseconds

EMI Suppression

Internal electromagnetic interference filtering

Static Power Dissipation

Max.12 watts

Burden in SHUNT & PMG Wiring

550 VA @ power input 110 Vac
1100 VA @ power input 220 Vac

Quadrature Droop Input (C1, C2)

CT 1A or 5A greater than 5VA (DIP switch setting)
Sensitivity +/- 7% @ PF +/- 0.5 (Droop adjustable)

Analogue Input (A1, A2)

Input resistance greater than 2K ohms
Max. Input +/- 5 Vdc or +10 Vdc
Sensitivity 1 Vdc for 2.5% Generator Volts (adjustable)

Under Frequency Protection (Factory Presets)

50 Hz system presets knee point at 45 Hz
60 Hz system presets knee point at 55 Hz

Over Excitation Protection

Set point 125 Vdc +/- 4 % @ power input 220 Vac
Inverse-time curve. This function can be turned off.

Voltage Thermal Drift

Less than 3% at temperature range -40 to +70 °C

Under-Frequency Knee Point Thermal Drift

Less than +/- 0.1 Hz at -40 to +70 °C

Environment

Operation Temperature	-40 to +70 °C
Storage Temperature	-40 to +85 °C
Relative Humidity	Max. 95%
Vibration	5.5 Gs @ 60 Hz

Dimensions

150.0 (L) x 135.0 (W) x 55.5 (H) mm
5.91 (L) x 5.31 (W) x 2.19 (H) inch

Weight

470 g +/- 2%
1.04 lb +/- 2%

SECTION 2 : OUTLINE / SIZE / INSTALLATION REFERENCE

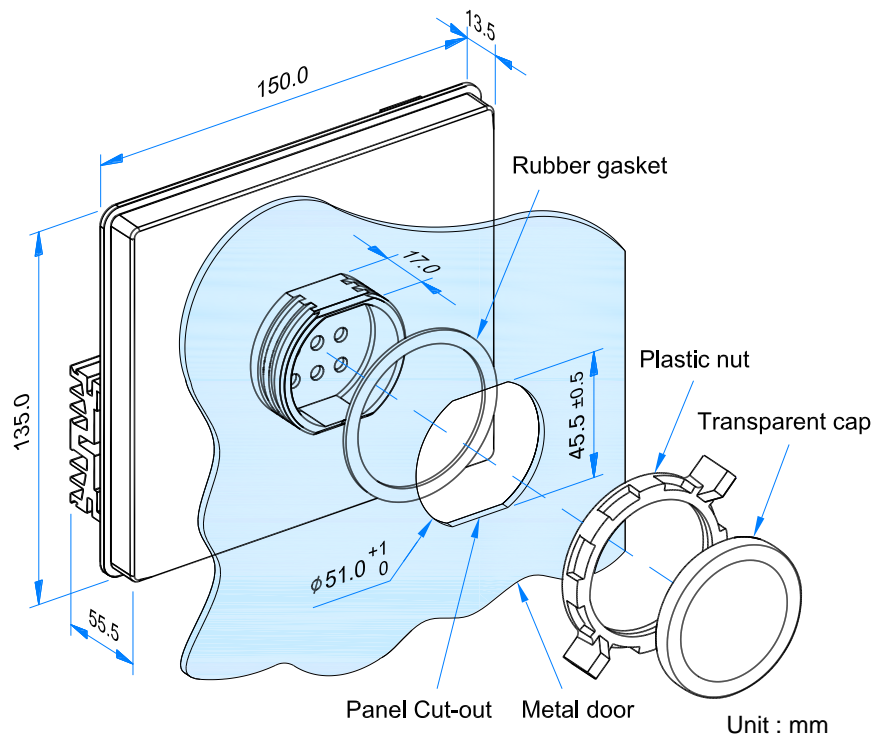


Figure 1 Outline Drawing

ATTENTION

1. AVR can be mounted directly on the engine, genset, switchgear, control panel, or any position that will not affect operation. For dimension reference, please see Figure 1.
2. All voltage readings are to be taken with an average-reading voltmeter.
3. Terminal : “Fast-On” terminals 6.35 mm (1/4 inch).

SECTION 3 : DIP SWITCH PROGRAMMING

SW1	ON		SW2	ON					
	<div><div></div><div></div></div> <div>12</div>	<div><div></div><div></div></div> <div>12</div>		<div><div></div><div></div></div> <div>12</div>	<div><div></div><div></div></div> <div>34</div>	<div><div></div><div></div></div> <div>56</div>	<div><div></div><div></div></div> <div>12</div>	<div><div></div><div></div></div> <div>34</div>	<div><div></div><div></div></div> <div>56</div>
SW1	1.OFF 2.OFF 220V		SW2	4.OFF 5.OFF <90KW					
	1.OFF 2.ON 380V			4.ON 5.OFF 90~500KW					
	1.ON 2.ON 480V			4.ON 5.ON >500KW					
SW2	OFF			ON					
	1	1 PHASE			3 PHASE				
	2	60Hz			50Hz				
	3	O/E PROTECT ON			O/E PROTECT OFF				
	6	CT 1A			CT 5A				

SW1
SW1-1 & SW1-2 Sets the Generators Sensing Voltage
SW2
SW2-1 Set Sensing Voltage for 1 or 3 Phase
SW2-2 Set Generator Frequency
SW2-3 Set Over Excitation Protection ON or OFF
SW2-4 & 5 Sets Generator Capacity
SW2-6 Sets Capacity of Droop CT

SECTION 4 : ADJUSTMENTS

U/F Under Frequency Protection Adjustment When generator speed falls below the knee point, the under frequency protection circuit will activate and the voltage and frequency begin to decrease in linear descend.


Select frequency 50 or 60 Hz according to the generator in use.

DIP U/F Dip Adjustment

When U/F protection is activated, the voltage droop ratio can be adjusted via this DIP (POT). The adjustable range is 3–10 V/Hz.

STAB Stability Adjustment

Correct stability adjustment must be conducted while the generator is operating without load. First adjust the STAB potentiometer (POT) anti-clockwise until the voltage becomes unstable, and then slightly adjust it clockwise (About 1/5 turn). When the voltage just reaches the critical point (Knee point) of stabilization, where the voltage is stable yet very close to becoming unstable.

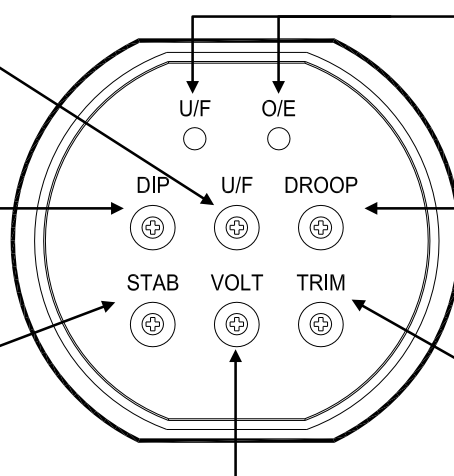

LED Indicator lit up when the generator is in U/F (Under Frequency Protection) and O/E (Over Excitation Protection).

DROOP Droop Adjustment

When paralleling, the AVR increase or decrease its voltage output, when phase current leads or lag the voltage. The increase and decrease range can be preset by the DROOP adjustment.

TRIM Trim Adjustment

When terminal A1 and A2 are biased with a DC voltage (0–10V), the TRIM is then used to adjust the influence on the output voltage of the AVR. If the TRIM (POT) is adjusted fully counter-clockwise, any bias voltage will not cause any influence. On the contrary if the TRIM is adjusted fully clockwise, then any signal will produce a maximum 10% effect.

VOLT Voltage Adjustment
Generator rated output voltage adjustment.

Must be in accordance with the DIP Switch SW1-1 & 2 voltage range setting.

Figure 2

SECTION 5 : WIRING CONNECTIONS

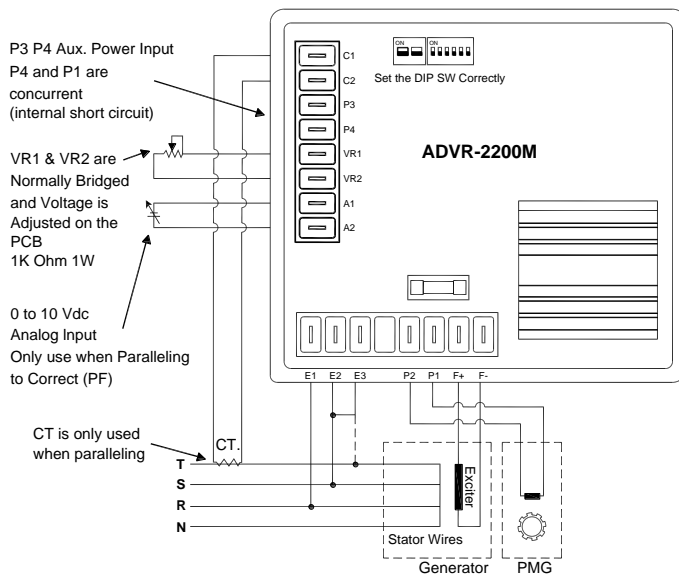


Figure 3 PMG Connection

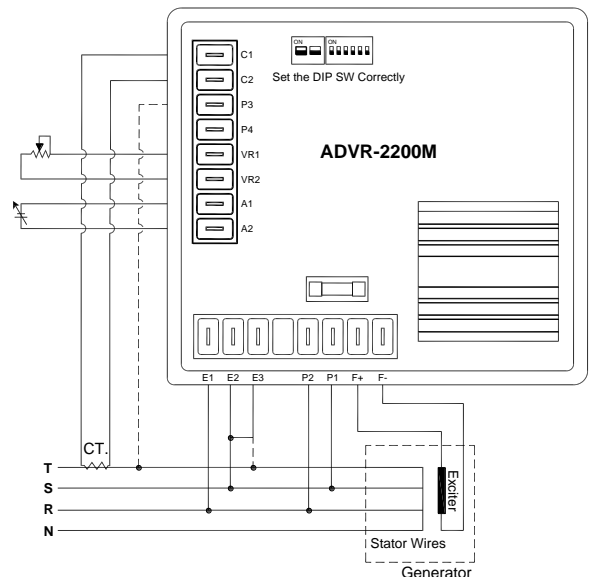


Figure 4 Shunt Connection (220V)

