

420 STANDARD

Sample Number: 420-CFL/4/26-347V-SAL-__

420 SERIES

420 Art Deco Ringed Baffle Pendant.

Series	Lamp	Voltage	Finish	Options	Suspension Height
420=Art Deco Ringed Baffle	CFL/4/26	120V	NA (standard),	AL	24"
	CFL/4/32	277V ¹	CC, MW, PCP,	DL	Or Specify
	CFL/4/42	347V ¹	SAL, SCP	DM ²	
	INC/3/150			REM ³ SCA ⁴ SJCAC SJWAC SSS2B SSS3B SSS4B	

- Notes:
1. Available with CFL only.
 2. Consult the factory for available options.
 3. Supplied by others.
 4. For Stem mounting only. Specify up to 45°.

MATERIAL

Solid aluminum materials. White 1/2" x 1/2" cube cell louver. Optional Matte White Acrylic Lense (AL). Single stem is standard suspension. Minimum 18" (OA).

BALLAST

Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION


Supplied with a bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided.

LAMP/SOCKET

Four (4) 26W, 32W (GX24q-3) or 42W (GX24q-4) 4-pin triple CFL lamps or three (3) 150W A-21 lamps. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

FINISH AND OPTIONS

See page 1020 for finish details and options.

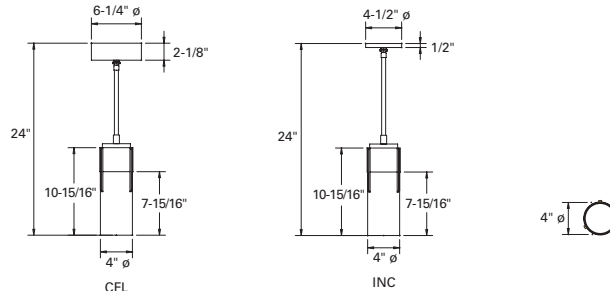

Sample Number: 422-CFL/1/18-347V-OBRS-__

422 SERIES

422 Luminous Cylinder Pendant features Three Accent Trim Bars.

Series	Lamp	Voltage	Finish	Options	Suspension Height
422=Luminous Cylinder w/ Trim Bars	CFL/1/18	120V	NA (standard),	CSJ	24"
	CFL/1/26	277V ¹	CC, MW, OBRS, PB, PC,	WSJ	Or Specify
	INC/1/40	347V ¹	PCP, PN, SAL, SB, SC, SCL, SCP, SN, SNL	DL DM ² REM ³ SCA ⁴ FC	

- Notes:
1. Available with CFL only.
 2. Consult the factory for available options.
 3. Supplied by others.
 4. Specify up to 45°.

MATERIAL

Solid brass or aluminum housing and clear sanded decorative trim. Matte acrylic 4" Dia. luminous cylinder. Supplied with a single stem with a standard overall hang height 24" (OA), minimum 18" (OA).

BALLAST

Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION


Supplied with either a circle strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided.

LAMP/SOCKET

One (1) 18W (G24q-2), or 26W (G24q-3) 4-pin quad CFL lamp or one (1) 40W A-19 lamp. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

FINISH AND OPTIONS

See page 1020 for finish details and options.

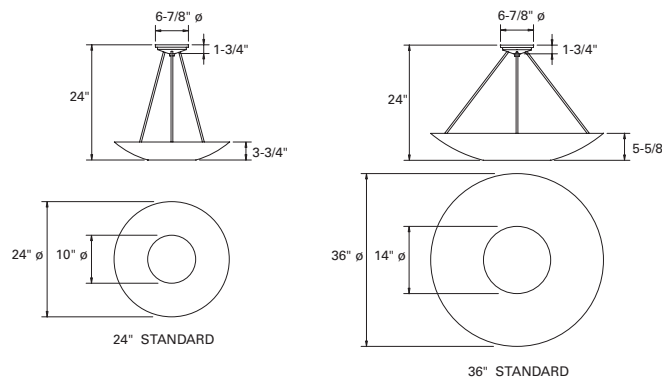

24" STANDARD

36" STANDARD

Sample Number: 429-24-CFL/6/26-347V-OBRS-__

429 SERIES

429 Solid Direct/Indirect Bowl with an illuminated baffle available in two diameters with multiple mounting options.

Series	Size	Lamp	Voltage	Finish	Options	Suspension Height
429=Solid Baffle w/ Illuminated Baffle	24"	CFL/6/26 ¹	120V	MW (standard),	CSS2B	DL
	36"	CFL/6/32 ¹	277V	CC, OBRS, PB ³ ,	CSS3B	DM ⁴
		CFL/8/32 ²	347V	PC ³ , PCP, SAL,	CSS4B	REM ⁵
		CFL/8/42 ²		SB, SC, SCL,	SJCAC	SCA ⁶
		INC/6/75 ¹		SCP	SJWAC	
		INC/6/100 ²				

- Notes:
1. Available in 24".
 2. Available in 36".
 3. 24" only.
 4. Consult the factory for available options.
 5. Supplied by others.
 6. Specify up to 45°.

MATERIAL

Painted and plated cold rolled steel with acrylic baffle rings. Tri-pod is standard suspension for 6 lamp versions. Quad-pod suspension is standard for 8 lamp versions.

BALLAST

Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION

Supplied with a bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided.

LAMP/SOCKET

24": Six (6) 26W or 32W (GX24q-3) 4-pin triple CFL lamps or six (6) 75W A-19 lamps.
36": Eight (8) 32W (GX24q-3) or 42W (GX24q-4) 4-pin triple CFL lamps or six (6) 100W A-19 lamps. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

FINISH AND OPTIONS

See page 1020 for finish details and options.