


SHAPER™



482 SERIES

482 Luminous Cylinder features Accent Trim Bars and Finials and is available in two diameters with multiple mounting options.

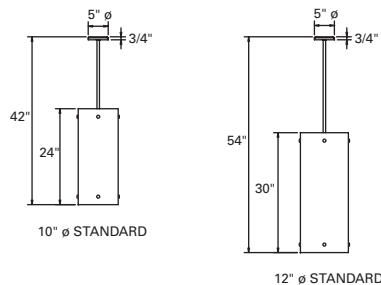

Sample Number: 482-12-CFL/4/40-347V-OBRS-

Series	Size	Lamp	Downlight Lamp	Voltage
482=	10"	CFL/4/39 ¹	HAL/1/150 ²	120V
Cylinder w/ Accent Trim Bars and Finials	12"	CFL/4/40 ²		277V ³
	12"-D	CFL/4/50 ²		347V ³
		CFL/4/55 ²		
		INC/6/75 ¹		
		INC/6/100 ²		

Notes:

1. Available in 10".
2. Available in 12".
3. Available with CFL only.
4. Consult the factory for available options.
5. Consult factory for alternative trim patterns, perf and color inserts.
6. Supplied by others.
7. Specify up to 45°.

Finish	Options	Suspension Height
MW (standard), CC, OBRS, PB, PC, PCP, SAL, SB, SC, SCL, SCP	3S DL DM ⁴ IEM ² PI ⁵ REM ⁶	SCA ⁷ FC HTB HTB/V TB VTB
		42" (OA) - 10" cyl. 54" (OA) - 12" cyl. Or Specify

MATERIAL

Solid brass or aluminum housing and decorative trim/finials. Matte acrylic luminous cylinder. Regressed aluminum louver frame and 1/2" x 1/2" cube cell louver. One 5/8" stem is standard suspension. Hang height (10" cylinder) of 42" (OA), minimum 34" (OA) and (12" cylinder) 54" (OA), minimum 40" (OA). Supplied with a swivel canopy which will accommodate up to 45° total adjustment.

BALLAST

Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION

Two circuit wiring. Supplied with either a circle strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided.


LAMP/SOCKET

10": Four (4) 39W (2G11) high lumen CFL lamps or six (6) 75W A-19 lamps.
12": Four (4) 40W, 50W or 55W (2G11) high lumen CFL lamps or six (6) 100W A-19 lamps.

12" Downlight (D): One (1) 150WPAR38H. CFL socket injection molded plastic. INC socket fired ceramic rated for 660V-250V. Lamps furnished by others.

FINISH AND OPTIONS

See page 1020 for finish details and options.

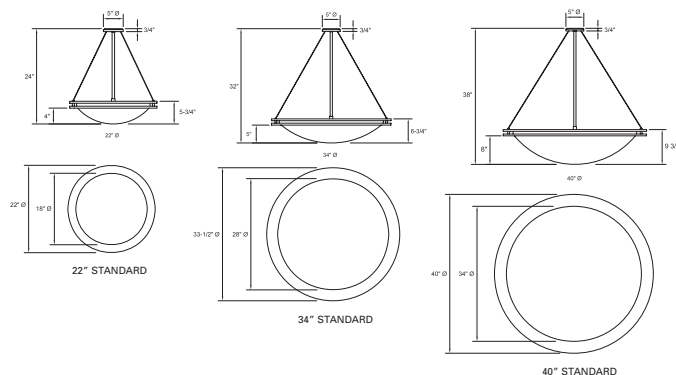

494 SERIES

The 494 Direct/Indirect Pendant features a luminous bowl with double ring trim and is available in three diameters with multiple mounting options.

Sample Number: 494-34-CFL/8/32-347V-SCL-22

Series	Size	Lamp	Voltage	Finish	Options	Suspension Height
494 = Luminous Bowl w/ Double Ring Trim	22"	CFL/4/13 ¹	120V	MW (standard), CC, OBRS, PB, PC, PCP, PN, SAL, SB, SC, SCL, SCP, SN, SNL	1S	24" (OA) - 22" dia.
	34"	CFL/4/26 ^{1,2}	277V ⁴		3S	32" (OA) - 34" dia.
	40"	CFL/4/32 ²	347V ⁴		QP	38" (OA) - 40" dia.
		CFL/4/39 ³			SJCAC	Or Specify
		CFL/4/42 ³			SJWAC	
		CFL/8/26 ²			SSS2B	
		CFL/8/27			SSS3B	
		CFL/8/32 ²			SSS4B	
		CFL/8/42 ³			TP	
		INC/3/75 ¹			DL	
		INC/3/100 ²			DM ⁶	
		INC/6/100 ³			IEM ^{2,3}	
					REM ⁷	
					SCA ⁸	
					FB	
					TB	

Notes:

1. Available in 22".
2. Available in 34".
3. Available in 40".
4. Available with CFL only.
5. For polished finishes the bottom inside edge of the ring is satin to prevent upper ring reflections.
6. Consult the factory for available options.
7. Supplied by others.
8. Not available with 1SAC, SJWAC or SJCAC. Specify up to 45°.

MATERIAL

Painted and plated cold rolled steel or natural aluminum. Matte white acrylic bowl. Single Stem Aircraft Cable (Standard): One 5/8" stem and three or four 3/32" cables with a standard hang height of 24" (OA), minimum 20" (OA).

BALLAST

Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION

Supplied with either a circle strap mounting canopy or bar strap that mounts to a 4" J-box or plaster ring. Integral safety cable provided.

LAMP/SOCKET

22": Four (4) 13W (2GX7) 4-pin low wattage CFL lamps, 26W (GX24q-3) 4-pin quad CFL lamps or three (3) 75W A-19 lamps.

34": Four (4) or eight (8) 26W or 32W (GX24q-3) 4-pin triple CFL lamps or three (3) 100W A-19 lamps.

40": Four (4) or eight (8) 39W (2G11) high lumen CFL lamps, 42W (GX24q-4) 4-pin triple CFL lamps or six (6) 100W A-19 lamps. CFL socket injection molded plastic. INC socket fired ceramic rated for 660V-250V. Lamps furnished by others.

FINISH AND OPTIONS

See page 1020 for finish details and options.