

## **INSTALLATION INSTRUCTIONS**

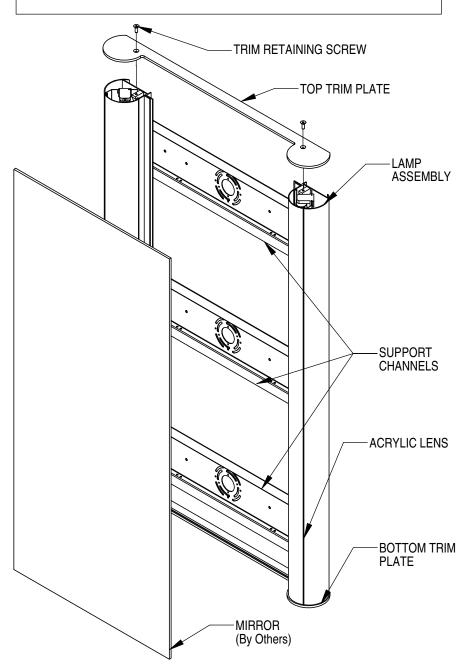

## **NOTICE:**

- ☐ For proper installation, have a qualified electrician install this product.
- Before installation of any luminaire onto an electrical junction box, be sure to disconnect power.
- ☐ This luminaire must be wired and grounded in accordance with the National Electrical Code, local codes, and ordinances.
- ☐ Wire supply connections must be made with U.L. approved connectors.
- ☐ Check that luminaire voltage and building voltage are the same.



MODEL 601V-48

## **INSTRUCTIONS:**

- Remove TRIM RETAINING SCREWS from the TOP TRIM PLATE.
- 2. Mount the SUPPORT CHANNELS (3) to the wall with the holes provided. (Contractor may add additional holes if needed)
- Using U.L. approved wire connectors: connect the luminaire 3. neutral (white) to the supply neutral, connect the luminaire line wire (black) to the supply line wire. Fasten green ground wire(s) to ground screw.
- 4. Remove the ACRYLIC LENS from the LAMP ASSEMBLY and install the lamp. Test the fixture and make sure the power is off before continuing.
- 5. Reinstall the ACRYLIC LENS by snapping into groove on either side.
- Install the MIRROR (By others) into the groove at BOTTOM TRIM PLATE and reinstall the TOP TRIM PLATE and TRIM RETAINING SCREWS. 6.



