

VGA over Single CAT5 Series

EX-G075B

VGA & Audio & RS-232 over CAT5
Extender with RGB Delay Control

User Manual

EX-G075B-TX



EX-G075B-RX





Safety and Notice

The **EX-G075B VGA & Audio & RS-232 over CAT5 Extender with RGB Delay Control** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the EX-G075B should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.

Introduction

With only one cost effective CAT-5e cable, the EX-G075B lets you extend VGA (WUXGA), bi-directional IR control and serial RS-232 at the same time to cover the distance up to 330m (1,000ft). The devices are composed of a transmitter and a receiver. The transmitter EX-G075B-TX is installed near the signal source, and the receiver EX-G075B-RX is placed near the desired display. With built-in EQ and GAIN control, the transmission path can be adjusted to adapt the cable quality and video bandwidth. Furthermore, the VGA RGB delay control [de-skew] function provides the compensation among R, G, B signals due to long transmission or through normal LAN cable. In order to extend the control path, EX-G075B also built RS-232 half-duplex long range extender along with VGA video signals.

Features

- Supports up to WUXGA [1920x1200@60] or UXGA [1600x1200@60] to 330m (1,000ft)
- Supports RS-232 half-duplex & bi-directional IR control path
- Supports analog stereo audio
- Supports S/PDIF
- Video and audio loop out on TX unit
- Adjustable equalization and gain control on RX unit
- De-skew compensation available for RGB delay control
- Wall mounting case for better fixedness

VGA over Single CAT5 Series Lineup


	EX-G028A	EX-G028B	EX-G029A	EX-G029B	EX-G073A	EX-G073B	EX-G075A	EX-G075B
VGA video	●	●	●	●	●	●	●	●
Stereo analog audio			●	●			●	●
RS-232 signals					●	●	●	●
IR signals							●	●
Equalization	●	●	●	●	●	●	●	●
Gain control	●	●	●	●	●	●	●	●
RGB delay control		●		●		●		●
Transmission length	330m [1,000ft] at WUXGA [1920x1200@60] or UXGA [1600x1200@60]							

Specifications & Package Contents

Model Name		EX-G075A		EX-G075B	
Technical		EX-G075A-T X	EX-G075A-RX	EX-G075B-TX aka EX-G075A-TX	EX-G075B-RX
Role of usage		Transmitter [TX]	Receiver [RX]	Transmitter [TX]	Receiver [RX]
Video bandwidth		350MHz			
Video support		VESA			
Transmission		WUXGA [1920x1200] — 330m (1,000ft) [CAT5e]			
Audio support		Stereo			
RS-232 signal type		Half-duplex			
Input video signal		1.2 Volts [peak-to-peak]			
Equalization		Continuous analog control			
RGB delay control		No		Yes	
Loop-out		1 VGA loop-out + 1 audio loop-out at TX			
ESD protection		Human body model — ±15kV [air-gap discharge] & ±8kV [contact discharge]			
Input		1x VGA 1x RS-232 2x 3.5mm 1x RCA 1x RS-232	1x 3.5mm 1xRJ-45	1x VGA 1x RS-232 2x 3.5mm 1x RCA 1x RS-232	1x 3.5mm 1xRJ-45
Output		1x RJ-45 1x VGA 2x 3.5mm 1x RCA	1x VGA 1x RS-232 1x RCA 1x 3.5mm	1x RJ-45 1x VGA 2x 3.5mm 1x RCA	1x VGA 1x RS-232 1x RCA 1x 3.5mm
VGA connector		HD-15 [15-pin D-sub female]			
RJ-45 connector		WE/SS 8P8C with 2 LED indicators			
RS-232 connector		DE-9 [9-pin D-sub female]			
RCA connector		S/PDIF digital audio			
3.5mm connector		Earphone jack for analog stereo audio or IR cable			
Mechanical					
Housing		Metal case			
Dimensions [L x W x H]	Model	[TX/RX] – 123 x 95 x 25mm [4.8"x3.7"x1"]			
	Package	330 x 200 x 95mm [1'1"x7.9"x3.7"]			
	Carton	495 x 440 x 380mm [1'7.5"x1'5.3"x1'3"]			
Weight	Model			g [oz]	
	Package				
Fixedness		Wall-mounting case with screws			
Power supply		Inter-locked 5V 2A DC			
Power consumption		6 Watts [max]			
Operation temperature		0~40°C [32~104°F]			
Storage temperature		-20~60°C [-4~140°F]			
Relative humidity		20~90% RH [no condensation]			
Package Contents		1x EX-G075A or EX-G075B [TX &RX], 2x 5V power adapter, 1x User Manual			


Panel Descriptions

Front Panel — Transmitting unit (EX-G075B-TX)

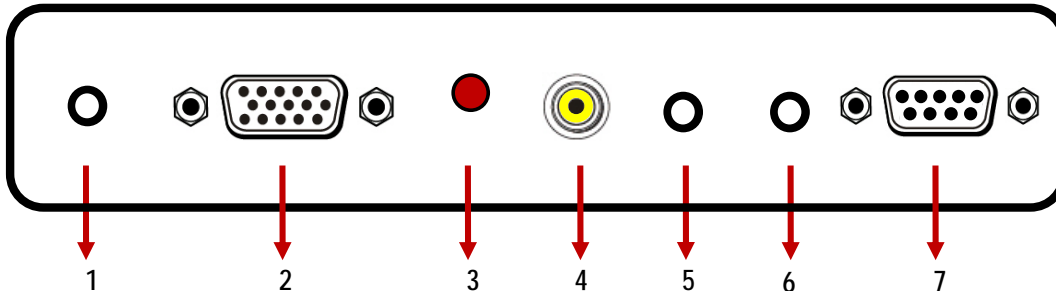

1. **IR IN:** Connect to IR RX cable input
2. **VGA IN:** VGA input
3. **Push button:** Select S/PDIF or analog stereo audio signal source
4. **S/PDIF IN:** Digital audio input
5. **Audio OUT:** Connect to analog audio input
6. **IR OUT:** Connect to IR TX cable
7. **RS-232 IN:** Connect to a RS-232 signal source

Rear Panel — Transmitting unit (EX-G075B-TX)

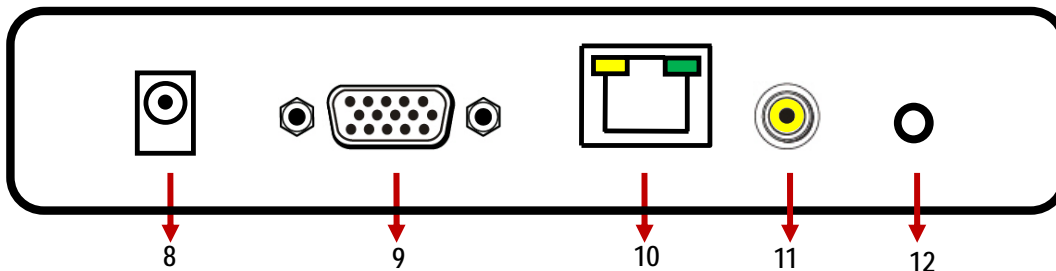


8. **+5V DC power jack:** connect to 5V DC power supply
9. **VGA OUT:** VGA loop-out to a local VGA display
10. **RJ-45 OUT:** Plug in a CAT-5/5e/6 cable that needs to be linked to the RJ-45 connector

of the receiving unit EX-G075B-RX.


11. **S/PDIF OUT:** Digital audio loop-out
12. **Audio OUT:** Analog audio loop-out

Front Panel — Receiving unit (EX-G075B-RX)

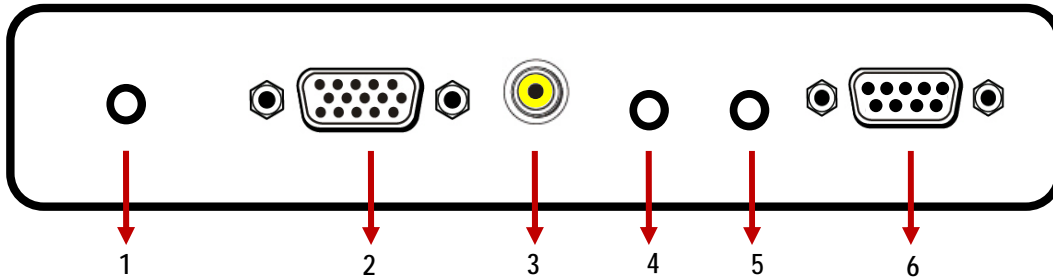

1. **IR IN:** Connect to a IR RX cable
2. **VGA OUT:** VGA output to a remote VGA display
3. **S/PDIF OUT:** Digital audio loop-out device
4. **Audio OUT:** Connect to stereo speaker
5. **IR OUT:** Connect to IR TX cable.
6. **RS-232 OUT:** Connect to a RS-232

Rear Panel — Receiving unit (EX-G075B-RX)

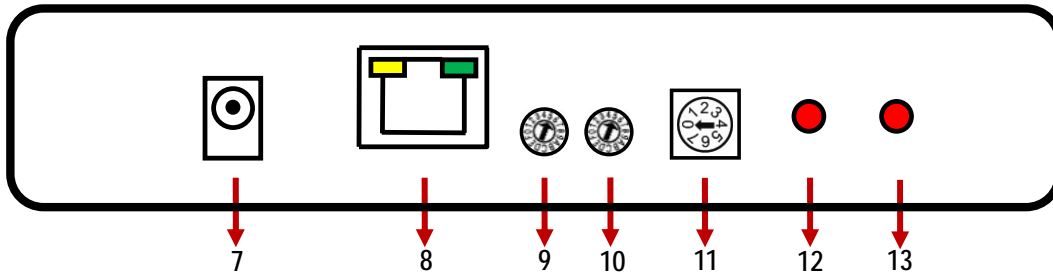

7. **+5V DC** power jack: connect to 5V DC power supply
8. **RJ-45 IN:** Plug in a CAT-5/5e/6 cable that needs to be linked to the RJ-45 connector of the transmitting unit EX-G075B-TX.
9. **EQ:** Rotary control for equalization of R, G, B, respectively
10. **GAIN:** Rotary control for gain control of R, G, B, respectively
11. **Rotary control:** R=0~2, G=3~5, B=6~7, for de-skew compensation on respective color channel (for RGB delay control)
12. **-:** Push button for decrease a level of de-skew compensation (for RGB delay control)
13. **+:** Push button for increase a level of de-skew compensation (for RGB delay control)

Hardware Installation

1. Connect your VGA, audio, IR and RS-232 source to the transmitting unit.
2. Connect your display, RS-232 receiving device, audio speaker, or IR equipped devices to the receiving unit.
3. Connect your CAT-5/5e/6 cable between the transmitting and receiving units.
4. Make sure your CAT-5/5e/6 cable is tightly connected and not loose.
5. Plug in 5V DC power cord to the power jack of the receiving unit.
6. Plug in 5V DC power cord to the power jack of the transmitting unit.
7. **If a blurred video is seen or even worse, not displayed at all, try to adjust the EQ and Gain rotary controls to improve the cable skew. GAIN rotary controls are designed for gain control, and EQ rotary controls are designed for equalizing the wave form of the receiving video signal. It is suggested to begin with adjusting the rotary control of EQ to get the input video displayed first, and then the GAIN according to the video you see on the screen.**
8. **RGB delay control [De-skew] offers the flexible functionality to allow skew compensation among VGA R, G, B signals due to long transmission or thru low quality cable. By adjusting the rotary switch to choose R, G or B color channel at first, then use the push buttons to increase or decrease the delay in the corresponding color channel. There are totally 31 steps, each step with 2ns difference, for adjusting the delay between each color individually. Then the graphics quality can be further assured.**

Notice

1. All transmission distances are measured using Belden 1583A CAT-5e 125MHz LAN cable and ASTRODESIGN Video Signal Generator VG-859C. The transmission distance is defined as the distance between the video source and the VGA display.
2. The transmission length is largely affected by the type of LAN cables, the type of video sources, and the type of display. The testing result shows solid LAN cables (usually in bulk cable 300m or 1000ft form) can transmit a lot longer signals than stranded LAN cables (usually in patch cord form). Shielded STP cables are better suit than unshielded UTP cables. A solid UTP CAT5e cable shows longer transmission length than stranded STP CAT6 cable. For long extension users, solid cables are your only choice.
3. To reduce the interference among the unshielded twisted pairs of wires in LAN cable, you can use shielded LAN cables to improve EMI problems, which is worsen in long transmission.
4. Because the quality of the LAN cables has the major effects in how long transmission distance will be made and how good is the received display, the actual transmission length is subject to your LAN cables. For resolution greater than 1080i or 1280x1024, a CAT-6 cable is recommended.



Performance Guide for VGA over LAN Cable Transmission

Performance rating		Type of LAN cable		
Wiring	Shielding	CAT5	CAT5e	CAT6
Solid	Unshielded (UTP)	***	****	*****
	Shielded (STP)	***	***	****
Stranded	Unshielded (UTP)	*	**	**
	Shielded (STP)	*	*	**
Termination		Please use EIA/TIA-568-B termination (T568B) at any time		

Limited Warranty

The SELLER warrants the **EX-G075B VGA & RS-232 over CAT5 Extender with RGB Delay Control** to be free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surges.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables are limited to a 30 day warranty and cable must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. Also, the technical information contained herein regarding the EX-G075B features and specifications is subject to change without further notice.