

COOPER LIGHTING - SURE-LITES®



ES SERIES

Edge-Lit
AC Only
Self-Powered
Recessed and Surface


EXIT LIGHTING

- Dual-voltage Input, 120/277 VAC 60Hz
- 18 gauge steel housing with conduit knockouts
- Extruded trim plate in Brushed or Polished Aluminum, Polished Brass, White, Black and Bronze
- Injection molded high-impact acrylic panel
- Clear, mirror, or white background
- LED Lamping: Super-bright, long life LEDs provide uniform illumination
- Sealed nickel cadmium, maintenance free, long life battery (Self Powered only)
- Full Recharge Time, 24 hrs. (max.)
- Recessed housing available for ceiling or wall mounting
- Convenient 1/2" knockouts provided in top and end of surface mounted housing
- Self-powered Exits feature solid-state voltage charger, solid-state switching, brownout circuit, test switch/power indicator light
- UL 924 Listed, Life Safety NFPA 101, NEC/OSHA, most state and local codes

DESCRIPTION


The Sure-Lites ES Series Exits are designed for architectural excellence and minimal presence. The crystal clear wedge shaped panel allows architectural details to shine through while providing excellent light distribution and exit visibility. Long life, energy-efficient LED lamps reduce energy costs and eliminate routine lamp maintenance.

DIMENSIONS

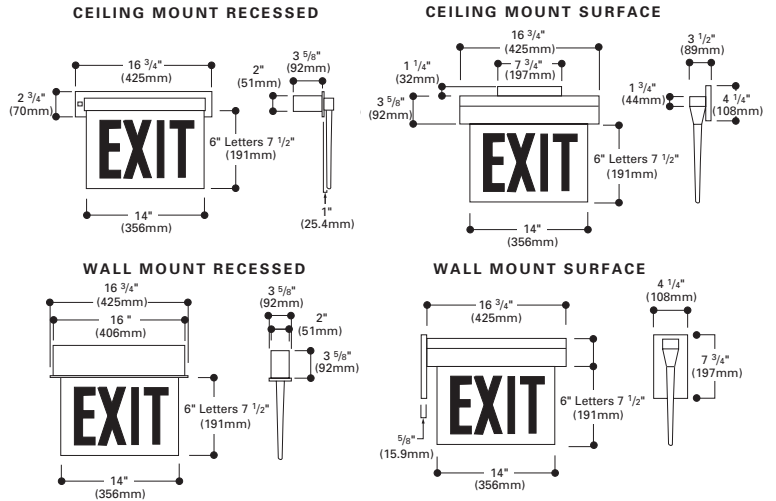


ORDERING INFORMATION-COMLETE UNITS RECESSED / SURFACE

SAMPLE NUMBER: ES7170WHRDAC

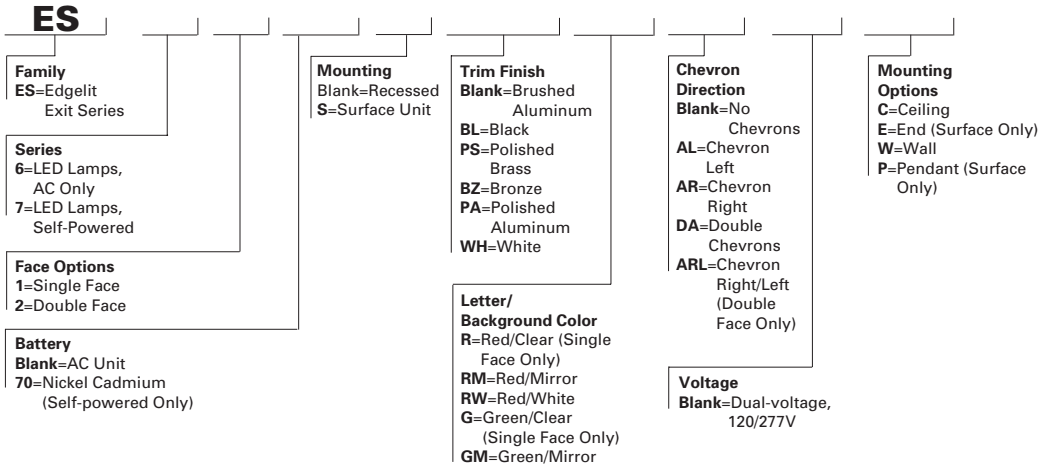


ORDERING INFORMATION - RECESSED HOUSING

SAMPLE NUMBER: ESH71

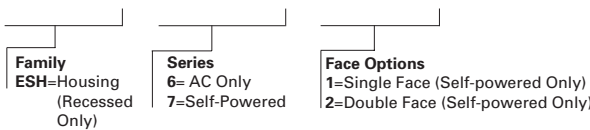

ORDERING INFORMATION - RECESSED TRIM

SAMPLE NUMBER: EST71WHRDAC

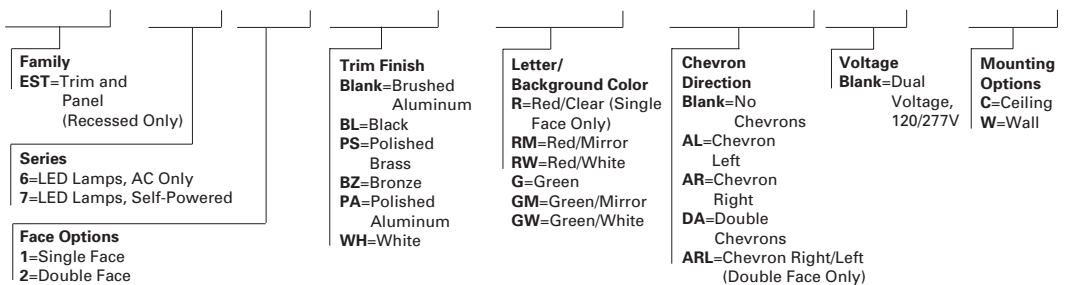

Energy Data

	Input Power:		Input Current (Max.):		Power Factor:		T.H.D.:	
	120V	277V	120V	277V	120V	277V	120V	277V
LED Exits								
LED Exits, Red Letters, AC Only	6.7W	6.7W	.06	.03	.8	.8	20%	20%
LED Exits, Red Letters, Self-Powered	7.0W	7.0W	.06	.03	.8	.8	20%	20%
LED Exits, Green Letters, AC Only	1.6W	1.6W	.02	.01	.6	.6	55%	82%
LED Exits, Green Letters, Self-Powered	2.0W	2.1W	.02	.01	.7	.7	45%	68%