

# COOPER LIGHTING - SURE-LITES®



## TPX SERIES

Die Cast  
AC Only

Thin Profile

### EXIT LIGHTING

- Dual-voltage input 120/277VAC, 60Hz
- Die cast aluminum faceplate
- Overall exposed exit thickness is only 3/4"
- LED lamping
- 20 gauge steel recessed housing fits in 2x4 construction
- 18 gauge steel mounting plate with universal mounting pattern
- Adjustable hanger bars
- Centerpin Torx tamper resistant screws on sides of faceplate – no visible mounting hardware on front face
- NFPA compliant knockout chevrons
- UL 924 Listed, Life Safety NFPA 101, NEC/OSHA, UL FTBR Listed (with "2C" option), UL Listed as suitable for floor proximity installation, most state and local codes


### DESCRIPTION

The TPX Thin Profile Exit Series combines the strength of die cast aluminum, the profile of recessed design and the superior aesthetics of Sure-Lites LED technology to create an exit with optimum versatility and aesthetics. The TPX Series faceplate assembly is only 3/4" thick, yielding a sign with minimal off-wall protrusion without requiring the large wall opening of a fully recessed exit.


The TPX Series also includes a Remote Powered Exit which can be powered from a TPX Series AC Only or Self-Powered Exit.

### DIMENSIONS

#### AC ONLY

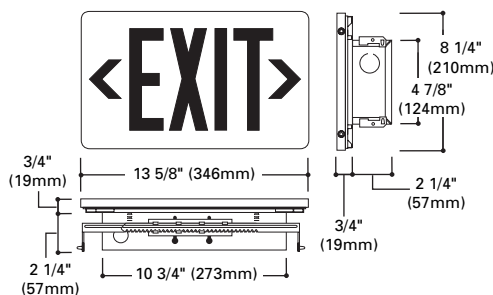


#### REMOTE POWERED




### ORDERING INFORMATION-AC ONLY EXITS

SAMPLE NUMBER: TPX610000RB

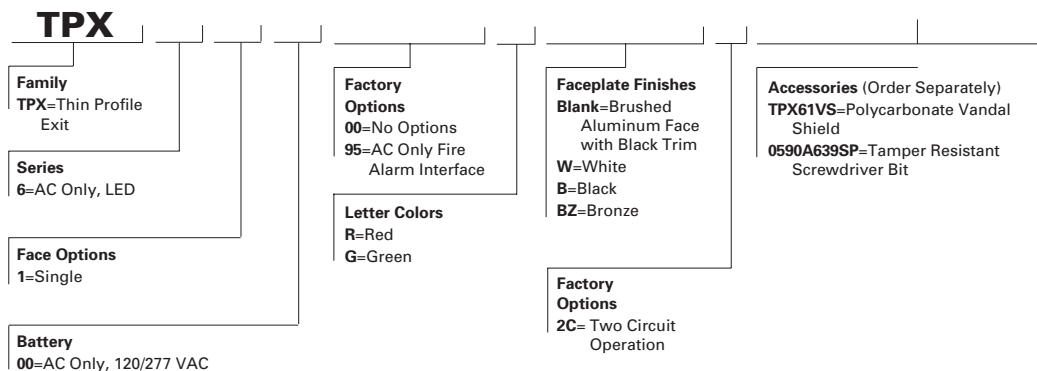

### ORDERING INFORMATION-REMOTE POWERED EXITS (Satellite, must be powered from another unit.)

SAMPLE NUMBER: TPX810000R

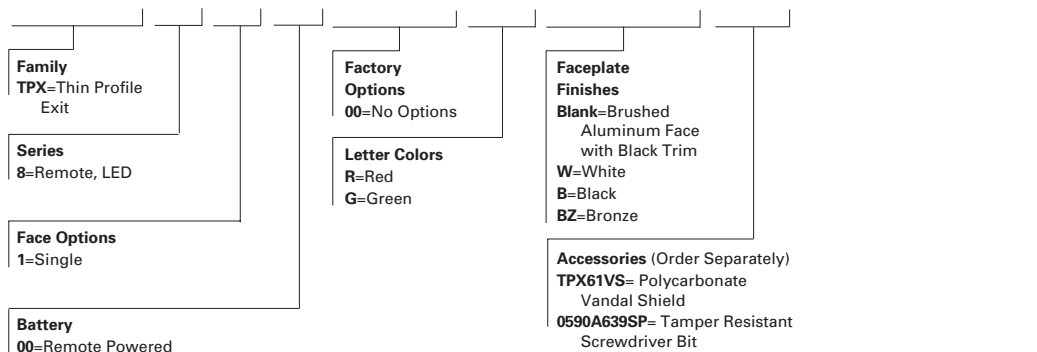

### Energy Data


	Standard Power - LED Exits						T.H.D.:	
	Input Power:		Input Current (Max.):		Power Factor:		120V	277V
	120V	277V	120V	277V	120V	277V	120V	277V
Red Letters Single Face	5.6W	5.7W	.07A	.03A	>.71	>.71	<36%	<36%
Red Letters Single Face with Remote	7.3W	7.3W	.07A	.03A	>.83	>.83	<33%	<34%
Green Letters Single Face	6.7W	6.8W	.07A	.03A	>.79	>.79	<30%	<31%
Green Letters Single Face with Remote	9.5W	9.7W	.09A	.04A	>.90	>.90	<26%	<27%

#### Remote Powered - LED Exits

Red Letters Single Face  
Approximately 2.0 watts additional

Green Letters Single Face  
Approximately 2.5 watts additional

## DIMENSIONS

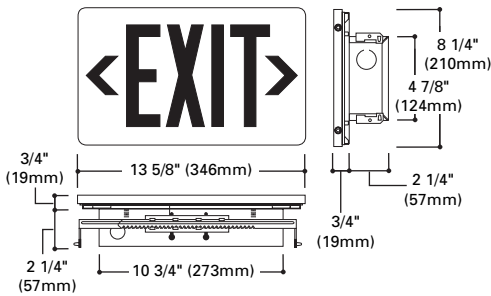

## DESCRIPTION

The TPX Thin Profile Exit Series combines the strength of die cast aluminum, the profile of recessed design and the superior aesthetics of Sure-Lites LED technology to create an exit with optimum versatility and aesthetics. The TPX Series faceplate assembly is only 3/4" thick, yielding a sign with minimal off-wall protrusion without requiring the large wall opening of a fully recessed exit.

The TPX Series also includes a Remote Powered Exit which can be powered from a TPX Series AC Only or Self-Powered Exit.




## TPX SERIES

Die Cast  
Self-Powered  
Thin Profile  
EXIT LIGHTING

- Dual-voltage input 120/277VAC, 60Hz
- Die cast aluminum faceplate
- Overall exposed exit thickness is only 3/4"
- LED Lamping
- Premium Nickel Cadmium battery
- 20 gauge steel recessed housing fits in 2x4 construction
- 18 gauge steel mounting plate with universal mounting pattern
- Centerpin Torx tamper resistant screws on sides of faceplate
- NFPA compliant knockout chevrons
- Adjustable hanger bars
- Line-latching, Solid-State voltage limited charger, Solid-State switching, low-voltage disconnect, brownout circuit, overload/short-circuit protection, test switch/power indicator light
- UL 924 Listed, Life Safety NFPA 101, NEC/OSHA, UL FTBR Listed (with "2C" option), UL Listed as suitable for floor proximity installation, most state and local codes

## ORDERING INFORMATION

SAMPLE NUMBER: TPX717020RB

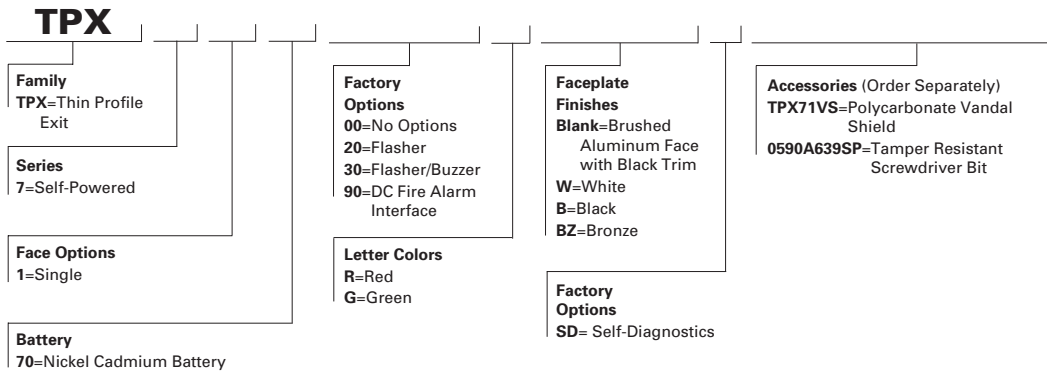

## Energy Data

### Standard Power - Sealed Nickel Cadmium Battery - LED Exits

	Input Power;		Input Current (Max.);		Power Factor;		T.H.D.:	
	120V	277V	120V	277V	120V	277V	120V	277V
Red Letters Single Face	7.4W	7.5W	.08A	.04A	>.72	>.72	<34%	<34%
Red Letters Single Face with Remote	9.3W	9.5W	.09A	.04A	>.84	>.84	<31%	<32%
Green Letters Single Face	8.5W	8.7W	.09A	.04A	>.79	>.79	<30%	<31%
Green Letters Single Face with Remote	11.4W	11.7W	.11A	.05A	>.90	>.90	<26%	<26%

### Standard Power with Self-Diagnostics Option ( Fully Discharged Battery) - LED Exits

Red Letters Single Face	8.4W	8.5W	.08A	.04A	>.82	>.82	<31%	<31%
Red Letters Single Face with Remote	9.8W	9.5W	.09A	.04A	>.86	>.84	<30%	<30%
Green Letters Single Face	9.1W	9.0W	.09A	.04A	>.86	>.85	<27%	<27%
Green Letters Single Face with Remote	11.2W	10.5W	.10A	.05A	>.90	>.88	<25%	<26%

**Standby Mode (Fully Charged Battery) Sealed Nickel Cadmium Battery** Input Power consumption is reduced by approximately 1.5 Watts in the standby operating mode