Lustertone® Undermount Single Bowl Sink Model ELUHR2014 and ELUHR201435 Series



SPECIFICATIONS

GENERAL

Highest quality sink seamlessly drawn of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Underside of sink is fully protected by heavy duty Sound Guard™ undercoating.

DESIGN FEATURES

Bowl Depth: 6-3/8".

Finish: Exposed surfaces are hand blended to a lustrous highlighted satin finish with highlighted inside top bowl radius. Underside: Fully protected by heavy duty Sound Guard™ undercoating to prevent condensation and deaden sound.

OTHER


Drain Opening: 2" (ELUHR2014), 3-1/2" (ELUHR201435). Note: All Elkay custom design undermount sinks are designed to affix easily to the underside of any solid surface countertop. Installation: See illustrated profiles below.

Recommended Minimum Cabinet: 24".




Model	Overall		Inside Bowl			Cutout in	Ship. Wt.
Number	L	W	L	W	D	Countertop	Lbs.
ELUHR2014L	20	14	11 ¹ / ₂	111/2	63/8	See Template**	9
ELUHR2014R	20	14	111/2	111/2	63/8		9
ELUHR201435L	20	14	11 ¹ / ₂	111/2	63/8		9
ELUHR201435R	20	14	11 ¹ / ₂	111/2	63/8		9

^{*}Length is left to right. Width is front to back.



Installation Profile of ELUH Single Bowl Models

The template provided with each ELUH sink provides the only type of installation recommended by Elkay.



ALL DIMENSIONS IN INCHES. TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.


This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

^{**}Template and countertop mounting clips are packed with every sink.



SPECIFICATIONS

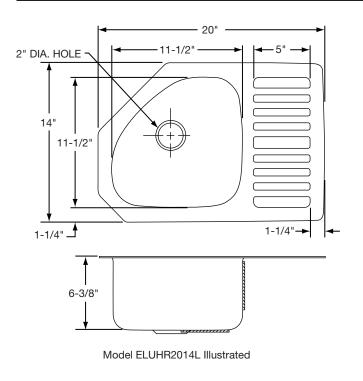



Model ELUHR2014R Illustrated

