



SVP101E Single-Channel HD **Video-Capture Card User Manual V1.02**



Solution



Application Note



Datasheet

| | |
|-----------------------------|--|
| Document Title: | SVP101E Single-Channel HD Video-Capture Card User Manual V1.02 |
| Version: | 1.02 |
| Date: | 2012-06-18 |
| Status: | Release |
| Document Control ID: | SVP101E Single-Channel HD Video-Capture Card User Manual V1.02 |

General Notes

SYSTECH offers this information as a service to its customers, to support application and engineering efforts that use the products designed by SYSTECH. The information provided is based upon requirements specifically provided to SYSTECH by the customers. SYSTECH has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by SYSTECH within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of SYSTECH. Copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Systech 2012

Version History

| Version | Date | Add/Del/Rev |
|---------|-----------|--|
| V1.00 | 2011-3-16 | New version |
| V1.01 | 2012-2-11 | Add audio equipment description explanation |
| V1.02 | 2012-6-18 | Modify product manual according to the systech template format |
| | | |

Contents

| | |
|---|-----------|
| 1 Preface..... | 8 |
| 2 Product introduction..... | 8 |
| 2.1 Product Feature..... | 8 |
| 2.2 Advanced Feature..... | 9 |
| 2.3 Product Specifications..... | 9 |
| 3 Minimum Hardware Configuration..... | 10 |
| 4 Recommended Hardware Configuration..... | 11 |
| 5 System Requirements..... | 11 |
| 6 Hardware and Driver Installation..... | 11 |
| 6.1 Parts List..... | 11 |
| 6.2 Install SVP101E:..... | 12 |
| 7 Connection of Video Input..... | 12 |
| 7.1 HDMI Signal..... | 12 |
| 7.2 YPbPr Signal..... | 13 |
| 7.3 Composite Video Broadcast Signal (CVBS) | 13 |
| 7.4 S-Video Signal..... | 14 |
| 8 Connection of Audio Signal..... | 14 |
| 9 Video Capture Device Instruction..... | 14 |
| 9.1 Display "Filter Properties Dialog Window" In Common Software..... | 15 |
| 9.2 "Device" Instruction..... | 15 |
| 9.3 "Advanced Settings" Instruction..... | 17 |
| 9.3.1 Input Signal..... | 18 |
| 9.3.1.1 Input Interface..... | 18 |

| | | |
|------------------|--|----|
| 9.3.1.2 | Signal Status..... | 18 |
| 9.3.2 | Image Adjustment..... | 18 |
| 9.3.3 | Image Output..... | 19 |
| 9.4 | "Color Adjustment" Instruction..... | 20 |
| 10 | Video Formats Setting..... | 21 |
| 10.1 | Display "Filter Output Pin" In Common Software..... | 21 |
| 10.2 | "Out Format" Instruction..... | 21 |
| 11 | Audio Capture Device Instruction..... | 22 |
| 11.1 | Windows XP, Windows 2003..... | 22 |
| 11.2 | Windows Vista, Windows 7, Windows 2008, Windows 2008 R2..... | 23 |
| 12 | Compatible Software Instruction..... | 24 |
| Appendix..... | | 25 |
| A. | Related Documents..... | 25 |
| Appendix 1. | Cyclone IV E components serial resources..... | 25 |
| Appendix 2. | Cyclone IV E components Packaging Products..... | 25 |
| Appendix 3. | Cyclone IV E components series of speed grade..... | 26 |
| Appendix 4. | Cyclone IV components series of M9K module data width..... | 27 |
| Appendix 5. | Cyclone IV components series support I/O standard..... | 27 |
| Appendix 6. | Cyclone IV components serial configuration solution..... | 27 |
| Appendix 7. | Cyclone IV components package products information..... | 28 |
| B. | Terms and Abbreviations..... | 29 |
| C. | Safety Caution..... | 30 |
| Contact us:..... | | 31 |

Table Index

| | |
|--|----|
| Table 1 SVP101E Single-Channel High-Definition Video-Capture Card Product Specifications.. | 10 |
| Table 1 SVP101E Single-Channel High-Definition Video-Capture Card Parts List..... | 11 |

Figure Index

| | |
|--|----|
| Figure 1, HDMI signal connection sketch map..... | 12 |
| Figure 2, YPbPr signal connection sketch map..... | 13 |
| Figure 3, composite video broadcast signal connection sketch map..... | 13 |
| Figure 4, S-Video signal connection sketch map..... | 14 |
| Figure 5, audio line in signal connection sketch map..... | 14 |
| Figure 6, Device Properties tab..... | 16 |
| Figure 7, "Advanced Settings " page..... | 18 |
| Figure 8 , "Color Adjustment" properties page..... | 20 |
| Figure 9, " Filter Output Pin"properties page..... | 21 |
| Figure 10 , Windows XP/2003"VolumeControl"- "Properties" dialogue..... | 23 |
| Figure 11, Windows Vista/7 recording device properties dialog windows..... | 24 |

1 Preface

Thank you for purchasing SVP101E HD capture adapter!

The SVP101E is featured with small and exquisite bulk, superior performance and flexible characteristics. The SVP101E can capture one High-Definition video signal and one stereo analog audio signal. Video input can connect with HDMI, YPbPr, Composite Video Broadcast Signal (CVBS), Separate Video(S-Video).

The product manual will provide with necessary instruction for proper use of SVP101E HD capture adapter.

2 Product introduction

2.1 Product Feature

- Simultaneously capture one High-Definition video signal and one stereo analog audio signal.
- 1080p/60 Hz for HD signal input.
- HD signal can capture HDMI, DVI, Y/Pb/Pr.
- Capture LPCM audio signal via HDMI.
- Microsoft AV Stream standard driver, support majority multimedia video software or streaming media software.
- Super small size: 99.77mm x 68.88mm , Low-Profile standard.

[Attention]:

For copyright protection, you cannot use for capturing HD signal which blu-ray player outputs.

2.2 Advanced Feature

- DMA transmission with high performance.
- HD input can switch signal dynamically, DVI/HDMI, Y/Pb/Pr.
- HD input can be compatible with CVBS and S-Video.
- HD input supports automatic detection of input video format, automatic detection of the valid area of video.
- HD input supports for multi-stage image zoom and provides with three scales for image aspect ratio.
- De-interlace supports Vertical Blend and Motion Adaptive.
- Hardware color conversion, it can output RGB24 , RGB32 , YUY2 , UYVY , I420.
- HD input supports color adjustment, it can adjust image brightness, contrast, hue, saturation, Gamma; also R, G, B brightness and contrast can be adjusted separately.
- HD input supports image vertical flip and mirror.
- The firmware can upgrade.

2.3 Product Specifications

| | |
|-----------------------|--|
| Board Size | 99.77mm x 68.88mm |
| Host Interface | PCI-Express x1, Low Profile, 200MB/s transmission bandwidth |
| Input Interface | 1 HDMI interface(DVI) 1 DB9 interface(to YPbPr, S-Video, CVBS, 1 unbalanced stereo audio line in) |
| Maximum Sampling Rate | CVBS : 54MHz (4x Oversampling) HDMI/DVI: 225MHz |
| Onboard Memory | 128MB DDR2, 160 MHz of working frequency, 32bit of bit wide |
| YPbPr Input Mode | 480i, 576i, 480p , 576p , 720p , 1080i , 1080p |
| DVI Input Mode | 480i, 576i, 480p , 576p , 720p , 1080i , 1080p |
| HDMI Input Mode | Up to HDMI 1.3 standard, support 36bit Deep Color |

| | |
|--------------------------|---|
| CVBS Input Standard | PAL/NTSC |
| HD Output Image Mode | Size: 40x30-2048x1536, frame rate: 1-100 fps, color: YUY2, UYVY, RGB24, RGB32, I420 |
| SD Output Image Mode | Size: 176x144-768x576, frame rate: 1-30 fps, color: YUY2, UYVY, RGB24, RGB32, I420 |
| Operating System Support | Support following operating systems (x 86 version or x64 version) : Windows® XP Professional Windows® Server 2003 Windows Vista®, Windows® Server 2008 Windows® 7 Windows® Server 2008 R2 |
| Power Consumption | <= 8W |
| Operating Temperature | 0 to 50 deg C |
| Storage Temperature | -20 to 70 deg C |
| Relative Humidity | 5% to 90% |

Table 1 SVP101E Single-Channel High-Definition Video-Capture Card Product Specifications

[Please note]:

1. PCI-Express actual transmission bandwidth relates with the host chipsets and motherboard, it may be lower than written value here.
2. The actual output frame rate is limited by PCI-Express interface bandwidth, it may be less than setting value.

3 Minimum Hardware Configuration

- Intel Core Solo
- 1G of RAM
- Available PCI-Express x1 expansion slot on mainboard

4 Recommended Hardware Configuration

- Intel Core i5
- 2G of RAM
- Available PCI-Express x1 expansion slot on motherboard

5 System Requirements

System should be one of the following systems (x 86 version or x64 version):

- Microsoft Windows XP
- Microsoft Windows Server 2003
- Microsoft Windows Vista
- Microsoft Windows Server 2008
- Microsoft Windows 7
- Microsoft Windows Server 2008 R2

6 Hardware and Driver Installation

Please contrast parts list and parts in package to confirm that there is no lack of any parts.

6.1 Parts List

| Parts | Number |
|-------------------------------------|--------|
| SVP101E Capture Adapter | 1 |
| DB9 to A/V Interface Breakout Cable | 1 |
| Low-Profile Baffle | 1 |
| Driver Installation CD | 1 |
| Product Manual (the document) | 1 |

Table 2 SVP101E Single-Channel High-Definition Video-Capture Card Parts List

6.2 Install SVP101E:

1. Power off the computer.
2. Discharge any static electricity build up in your body by touching a large grounded metal surface or the computers' case (if plugged in) for few seconds; or wear an antistatic wrist strap.
3. Put SVP101E capture adapter into the computer PCI-Express slot. The card can be putted into PCI Express x1, x4 or x16 slot.(Note: the x16 slot in some motherboard is exclusive use for graphics card, SVP101E may be not identified correctly)
4. Power on the computer to start the operating system.
5. Cancel the “find new hardware” image that the operating system prompts.
6. Insert the driver CD-ROM and run Autorun.exe in CD-ROM root directory.
7. Click the installation program and follow prompts to carry on remaining operations.
8. Run “AmCap.exe” in CD to check whether success after installation.

7 Connection of Video Input

7.1 HDMI Signal

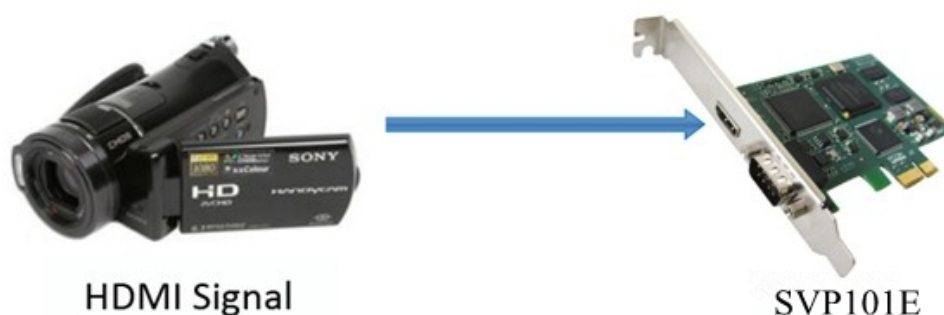


Figure 1, HDMI signal connection sketch map

7.2 YPbPr Signal

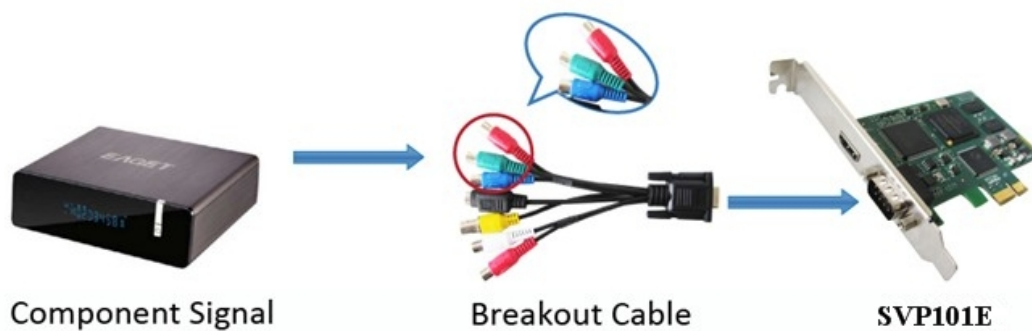


Figure 2, YPbPr signal connection sketch map

7.3 Composite Video Broadcast Signal (CVBS)

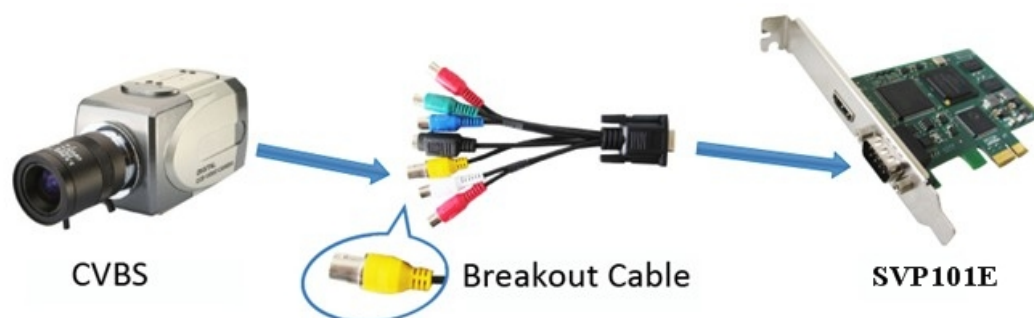


Figure 3, composite video broadcast signal connection sketch map

7.4 S-Video Signal

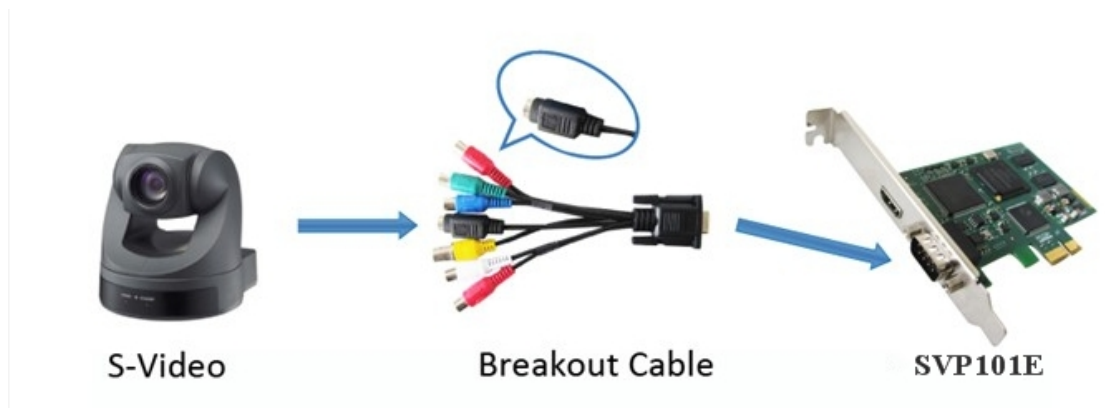


Figure 4, S-Video signal connection sketch map

8 Connection of Audio Signal

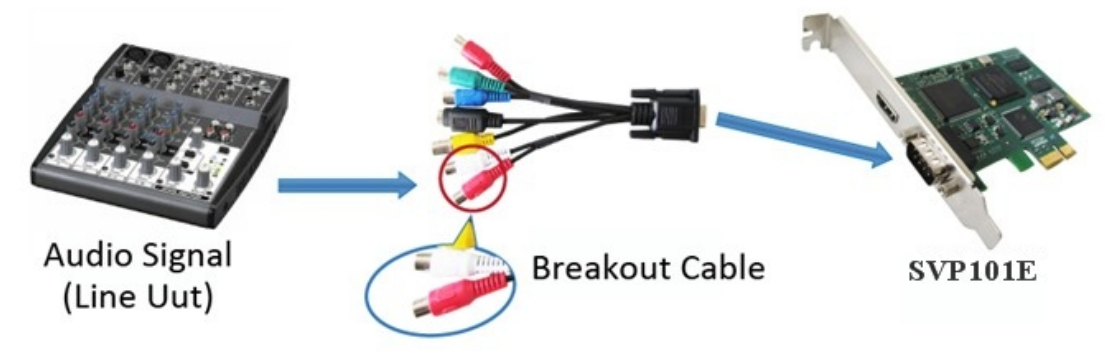


Figure 5, audio line in signal connection sketch map

[Notes]:

The audio signal input is up to " **Line in** " level standard, if you need to connect microphone , must connect microphone with microphone input of "**microphone amplifier**" or "**mixer**" , and then "**microphone amplifier**" or "**mixer** "output is connected to the interface.

9 Video Capture Device Instruction

SVP101E is based on Microsoft DirectShow interface, one video capture device will be increased in operating system after installation:

- HD Video (SVP101E Adapter 1)

SVP101E not only offers basic options, such as image brightness, contrast, hue, saturation, Gamma and so on, but also provides additional options for setting function. You can use **"Filter Properties dialog window"** in DirectShow to set these options.

9.1 Display "Filter Properties Dialog Window" In Common Software

AMCAP: Double click **"AmCap.exe"**, choose HD video device **"HD Video (SVP101E Adapter 1)"** in **"Devices"** menu, then click **"Video Capture Filter ..."** in **"Settings"** menu, pop-up **" Filter Properties dialog window"**.

9.2 “Device” Instruction

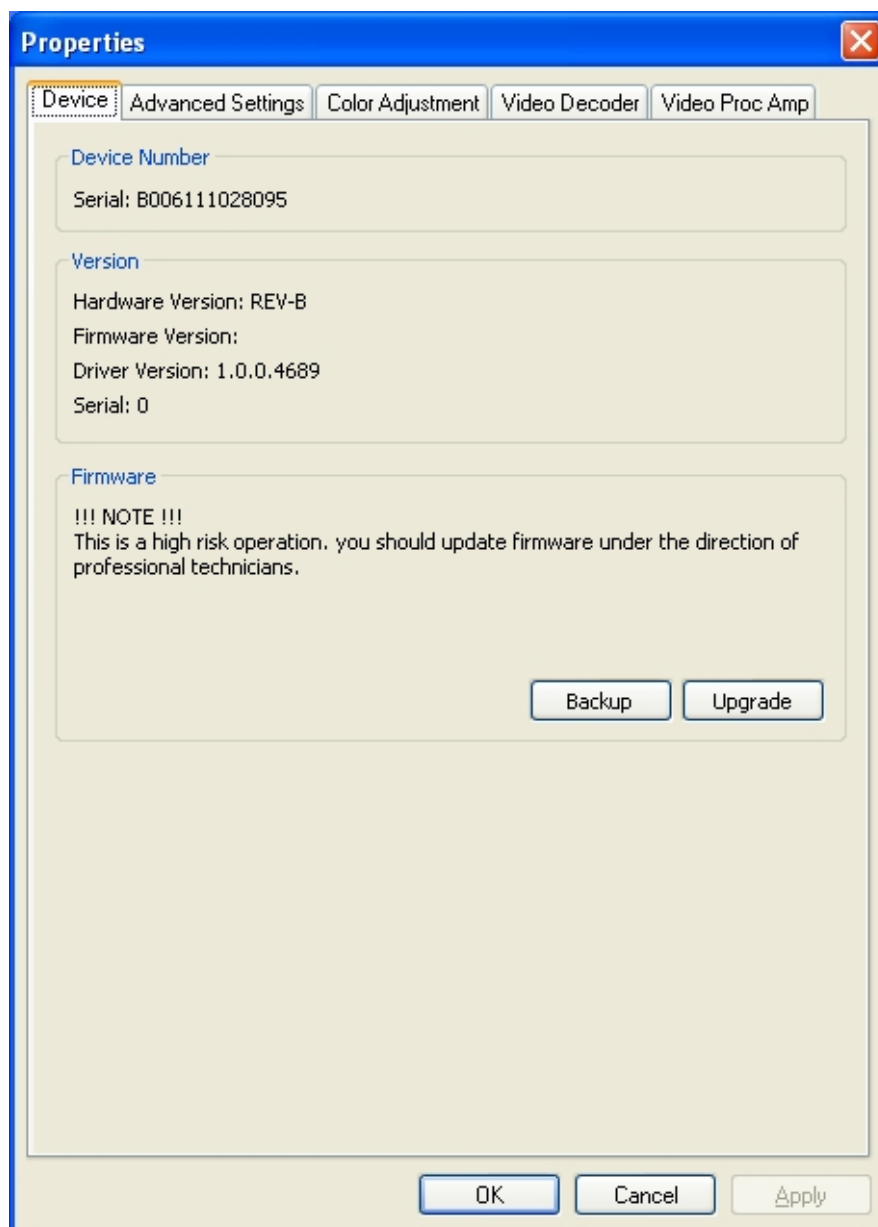


Figure 6, Device Properties tab

Device Number: display serial of card, the number should be accorded with the barcode on the card.

Version: display related version number, versions include hardware version, firmware version, driver version, and device serial. You may request user to provide relevant version number when you solve problems.

Firmware: if new features need to upgrade the firmware, we should first backup it and then upgrade the firmware.

Notes: The different versions of the firmware and hardware cannot be mixed together, or else it will get error when upgrade. Additionally, do not power outage in the process of firmware upgrade, otherwise it will lead to upgrade firmware fail, then SVP101E will not work. You have to return SVP101E back to factory for being repaired.

9.3 "Advanced Settings" Instruction

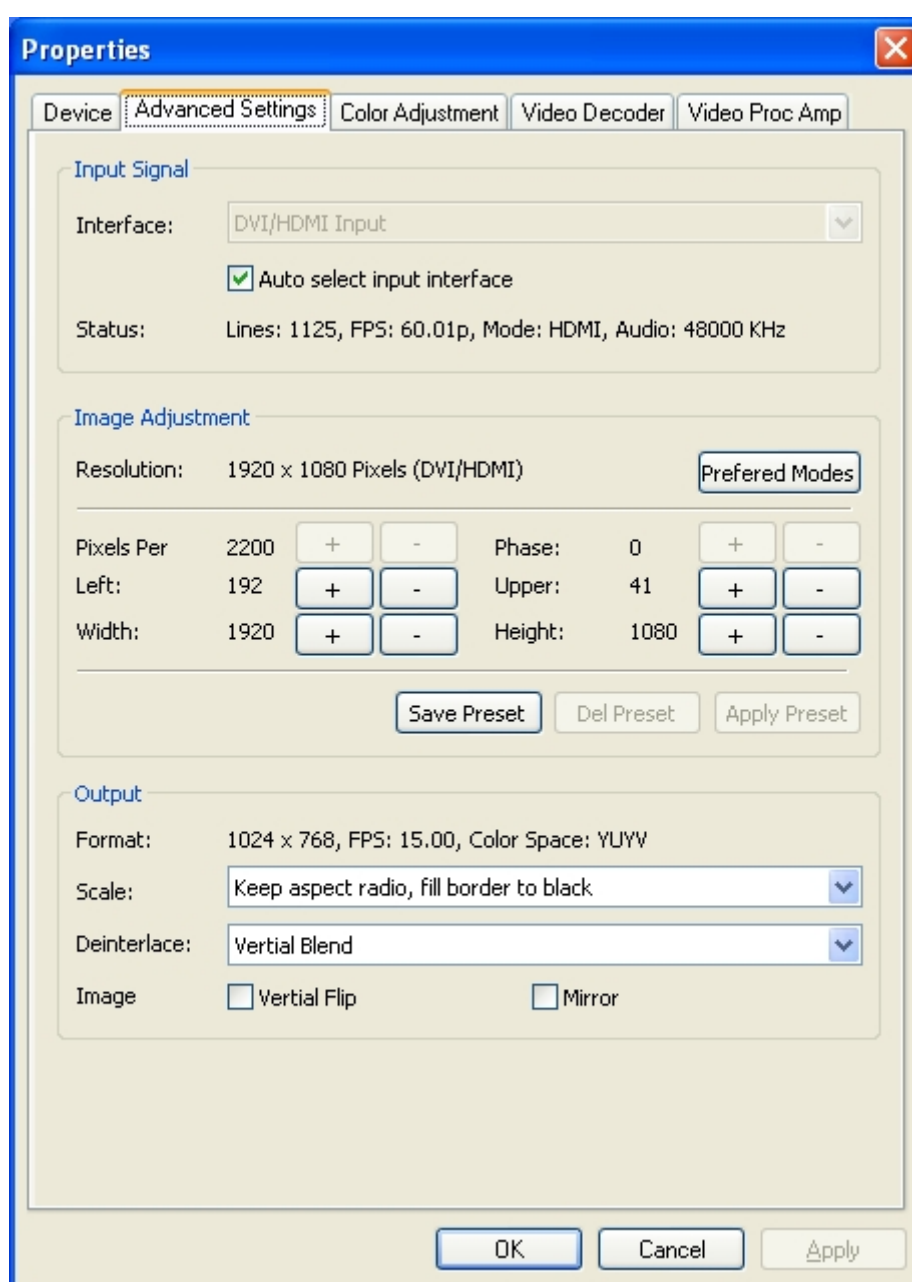


Figure 7, "Advanced Settings " page

9.3.1 Input Signal

9.3.1.1 Input Interface

By default, check “**Auto Select Input Interface**”, supporting input interface includes: DVI / HDMI input, YPbPr input, CVBS input ,S-Video input.

[Notes]:

when “**Auto Select Input Interface**” is selected, if HDMI and YPbPr input interfaces both have signal access, then HDMI input is preferred. You must select CVBS and S-Video input manually, otherwise it will be identified with YPbPr input.

9.3.1.2 Signal Status

The relevant parameters of signal are shown, such as total number of rows, frame rate (p is progressive scan, i is interlaced), mode, audio frequency.

9.3.2 Image Adjustment

By default, image is auto, but auto cannot achieve desired effect, such as black border, unclear image, picture which needs clipping, it must be adjusted manually. After adjustment, you can save the preset. Then you can apply preset values without adjustment when the same signal accesses.

- **Black border adjustment:** Through adjust left margin and top margin to eliminate black border. Every time you can adjust 1 pixel.
- **Image clipping:** Through adjust image width, height, left margin and top margin to achieve desired requirement. Increasing/reducing width of image starts from right, increasing/reducing height of image starts from below.

Skills of image clipping as follows:

1. Set scale full output image to confirm whether clipping adjustment is appropriate.
2. Cut off left margin of image: firstly increase left margin, then reduce image width.
3. Cut off right margin of image: reduce image width.
4. Cut off top margin of image: firstly reduce image height, and then increase top margin.
5. Cut off lower margin of image: reduce image height.

After image adjustment completes, click "**Save Preset**" to save current adjustment; click "**Del preset**" to delete preset you saved; click "**Apply Preset**" to apply the saved preset to current settings.

9.3.3 Image Output

Display output format of current image, set image zoom scale, deinterlace and image flipping.

- **Format:** display output image size, frame rate, color format.
- **Scale:** if image size is not unified with user setting, we provide three ways, full output image and keep aspect ratio, fill border to black and keep aspect ratio, clip border. Full output image and keep aspect ratio is default.
- **Deinterlace:** vertial blend, motion adaptive. Motion adaptive is better, but it takes up high CPU usage, also you can choose "disabled".
- **Image:** offer two ways, vertial flip and mirror.

9.4 "Color Adjustment" Instruction

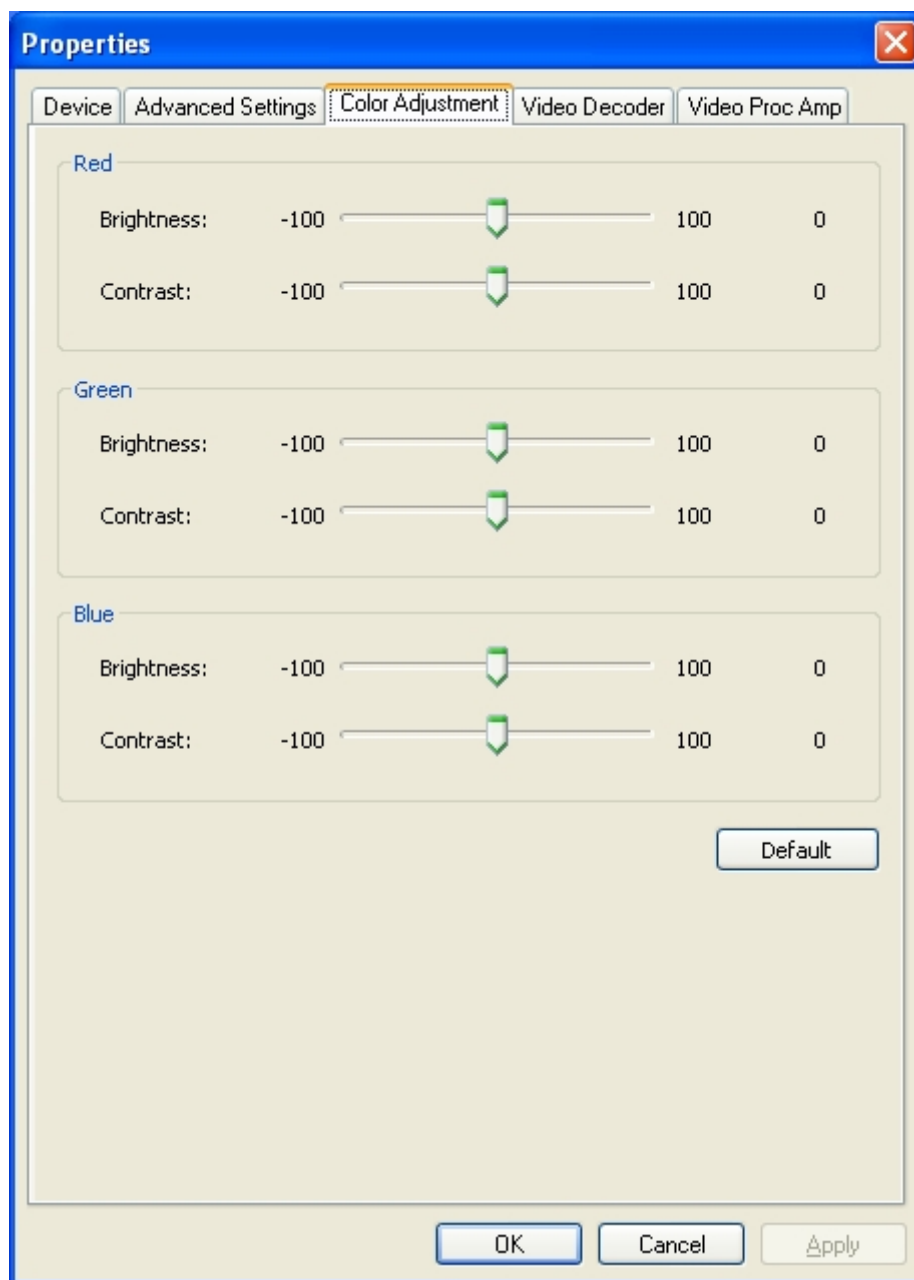


Figure 8 , "Color Adjustment" properties page

Here can be adjusted R, G, B brightness and contrast separately, click "**Default**" to restore default values.

10 Video Formats Setting

Driver is redefined "Filter Output Pin" interface and unified standard for SD and HD. Output resolution can be any size, even special resolution which is cut.

10.1 Display "Filter Output Pin" In Common Software

- **AMCAP:** Double click "AmCap.exe", choose HD video device "HD Video (XI100XE Adapter1)" in "Devices" menu, then click "Video Capture Pin ..." in "Settings" menu, pop-up "Filter Output Pin".

10.2 "Out Format" Instruction

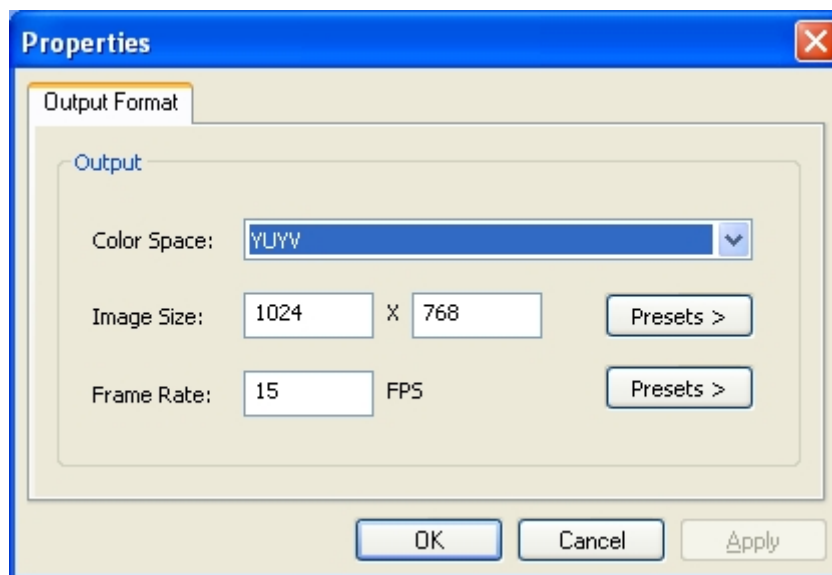


Figure 9, "Filter Output Pin" properties page

Color Space: offer five color formats, YUYV, UYVY, I420, RGB 24 Bits, and RGB 32 Bits.

Image Size: set image size of output, it can be written manually, or select output resolution from "Presets", the bold font resolution at the top is the same as capture image, it is the best resolution.

Frame Rate: set output frame rate, it can be written manually, or select from "Presets". If application software is set output frame rate, now setting is no effect, when you open again, it will return frame rate in application software.

11 Audio Capture Device Instruction


SVP101E is based on the Microsoft DirectShow interface. After installation in operating system, the relevant audio devices will be added on. Any software which is compatible with DirectSound, DirectShow can use the recording device for capturing sound, and then recorded as voices that HDMI and analog line are mixed. Also "**Volume**" and "**Mute**" in HDMI and analog line can be independently controlled.

11.1 Windows XP, Windows 2003

The name of audio capture device under Windows XP, Windows 2003:

- Audio (SVP101E Adapter 1)

Through system "**Volume Control**" to adjust recording volume, specific steps as follows:

1. In system notification icon area on right corner double-click " " button to pop-up "**Open Volume Control**" window.
2. Open "**Options**" menu, select "**Properties**" menu item.
3. In "**Mixer**", select "**Audio (SVP101E Adapter x)**", click "**OK**" button.
4. Corresponding volume control project will be displayed, this time you can operate volume and "**quiet**" according to your requirement.

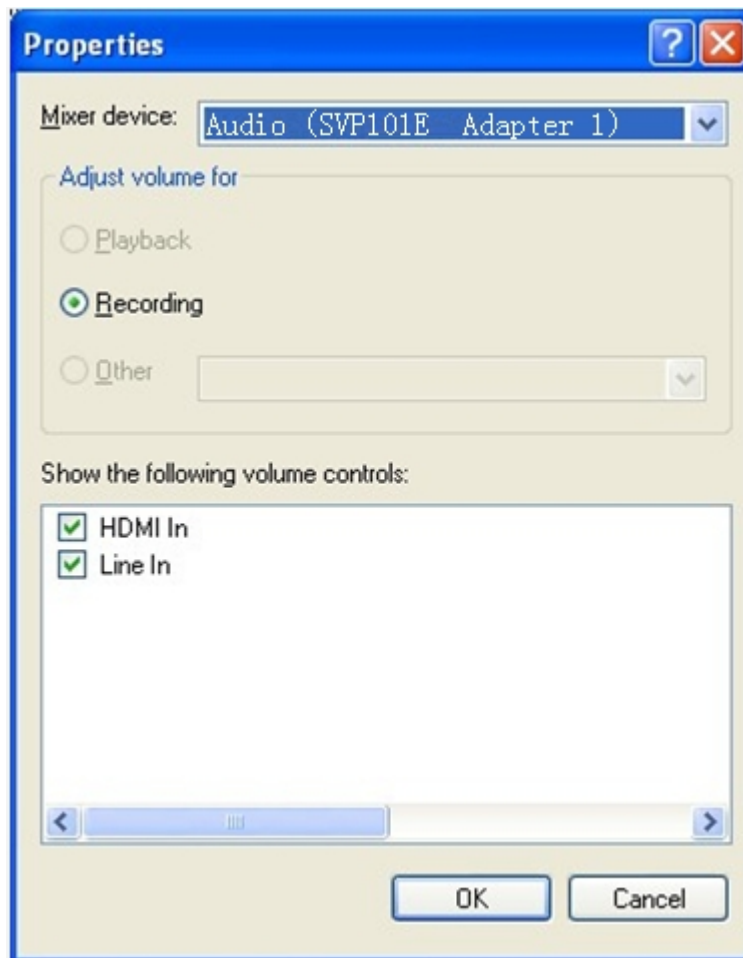



Figure 10 , Windows XP/2003 "VolumeControl" - "Properties" dialogue

11.2 Windows Vista, Windows 7, Windows 2008, Windows 2008 R2

Under such operating systems, each capture card will show two audio capture devices:

- HDMI In (SVP101E Adapter 1)
- Line In (SVP101E Adapter 1)

Through system "**Volume Control**" to adjust the recording volume, specific steps as follows:

1. In system notification icon area on right corner right-click " "button, select "**Recording devices**" in pop-up menu.
2. In pop-up list which displays recording device, select "**HDMI In**" or "**Line In**", click "**Properties**" button, system will pop up device properties dialog window.

3. In Properties dialog box, select "**Levels**" property page, then you can operate volume control and "**Quiet**" according to your requirement.

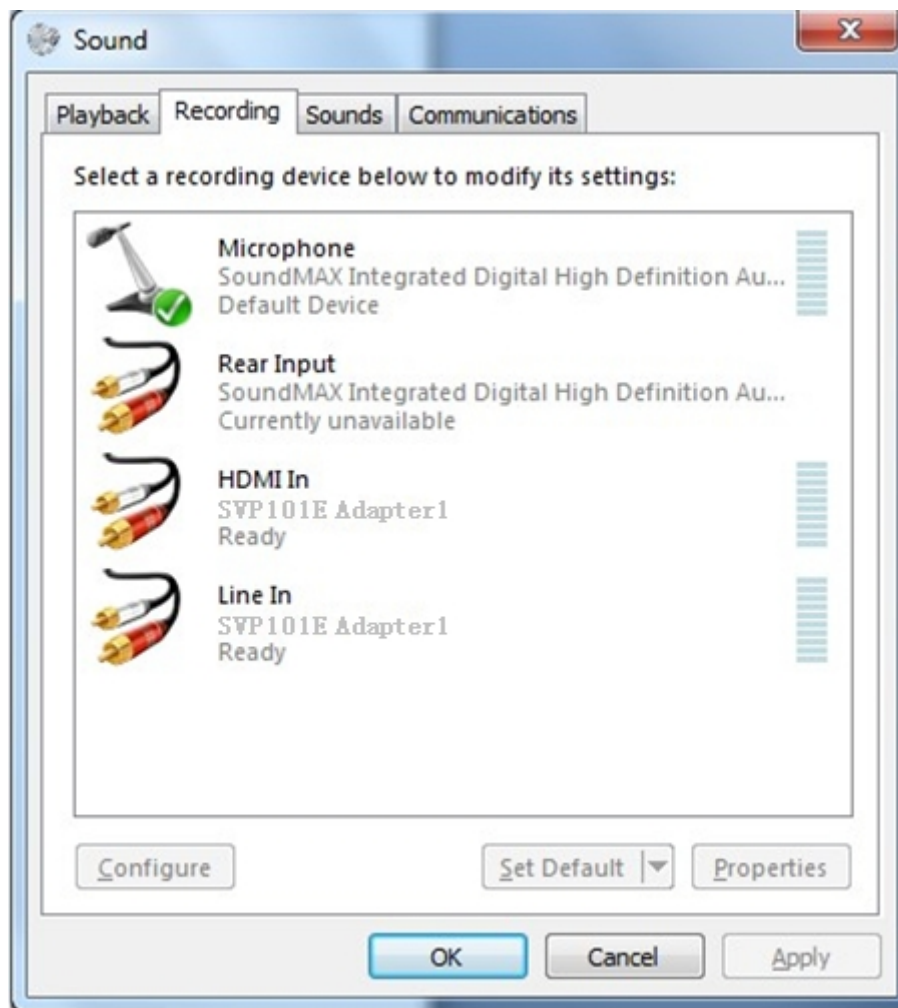


Figure 11, Windows Vista/7 recording device properties dialog windows

12 Compatible Software Instruction

SVP101E can be compatible with variety of audio and video capture software which is based Direct Show interface, and audio capture software which is based Direct Sound interface, such as:

- Windows Media Encoder
- Adobe Flash Media Live Encoder
- Real Producer Plus
- Video LAN for Windows

Appendix

A. Related Documents

Appendix 1. Cyclone IV E components serial resources

| resource | EP4CE6 | EP4CE10 | EP4CE15 | EP4CE22 | EP4CE30 | EP4CE40 | EP4CE55 | EP4CE75 | EP4CE115 |
|---------------------------------|--------|---------|---------|---------|---------|---------|---------|---------|----------|
| Logical unit (LE) | 6,272 | 10,320 | 15,408 | 22,320 | 28,848 | 39,600 | 55,856 | 75,408 | 114,480 |
| Embedded memory(Kbits) | 270 | 414 | 504 | 594 | 594 | 1,134 | 2,340 | 2,745 | 3,888 |
| Embedded 18*18 multiplying unit | 15 | 23 | 56 | 66 | 66 | 116 | 154 | 200 | 266 |
| Interchangeable PLL | 2 | 2 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Global clock networks | 10 | 10 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| User I/O piece | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Maximum user I/O (Note 1) | 179 | 179 | 343 | 153 | 532 | 532 | 374 | 426 | 528 |

[Note]:

User I / O pins in pin list file include all common I / O pins, dedicated clock pins and dual- configuration pins. Transceiver pins and dedicated configuration pins are not included in the pin list.

Appendix 2. Cyclone IV E components Packaging Products

| Package | E144 | | M164 | | U256 | | F256 | | U484 | | F484 | | F780 | |
|------------|----------|----------------|----------|----------------|----------|----------------|----------|----------------|----------|----------------|----------|----------------|----------|----------------|
| Size(mm) | 22 × 22 | | 8 × 8 | | 14 × 14 | | 17 × 17 | | 19 × 19 | | 23 × 23 | | 29 × 29 | |
| Pacing(mm) | 0.5 | | 0.5 | | 0.8 | | 1.0 | | 0.8 | | 1.0 | | 1.0 | |
| Devices | User I/O | L VDS (Note 2) | User I/O | L VDS (Note 2) | User I/O | L VDS (Note 2) | User I/O | L VDS (Note 2) | User I/O | L VDS (Note 2) | User I/O | L VDS (Note 2) | User I/O | L VDS (Note 2) |
| EP4CE6 | 91 | 21 | — | — | 179 | 66 | 179 | 66 | — | — | — | — | — | — |
| EP4CE10 | 91 | 21 | — | — | 179 | 66 | 179 | 66 | — | — | — | — | — | — |
| EP4CE15 | 81 | 18 | 89 | 21 | 165 | 53 | 165 | 53 | — | — | 343 | 137 | — | — |
| EP4CE22 | 79 | 17 | — | — | 153 | 52 | 153 | 52 | — | — | — | — | — | — |
| EP4CE30 | — | — | — | — | — | — | — | — | — | — | 328 | 124 | 532 | 224 |
| EP4CE40 | — | — | — | — | — | — | — | — | 328 | 124 | 328 | 124 | 532 | 224 |
| EP4CE55 | — | — | — | — | — | — | — | — | 324 | 132 | 324 | 132 | 374 | 160 |
| EP4CE75 | — | — | — | — | — | — | — | — | 292 | 110 | 292 | 110 | 426 | 178 |
| EP4CE115 | — | — | — | — | — | — | — | — | — | — | 280 | 103 | 528 | 230 |

[Note]:

(1) E144 package has an exposed substrate at the bottom, the exposed substrate connect ground ,it must be connected to the PCB ground surface. Use it for for circuit connection, rather than for temperature processing purposes.

(2) that includes a dedicated LVDS pairs, including pseudo-LVDS pairs. For more information.

Appendix 3. Cyclone IV E components series of speed grade

| Devices | E144 | M164 | U256 | F256 | U484 | F484 | F780 |
|----------|---|------|------|---|------|---|---------------------------------------|
| EP4CE6 | C8L, C9L, I8L C6, C7, C8, I7, A7 | — | I7N | C8L, C9L, I8L C6, C7, C8, I7, A7 | — | — | — |
| EP4CE10 | C8L, C9L, I8L C6, C7, C8, I7, A7 | — | I7N | C8L, C9L, I8L C6, C7, C8, I7, A7 | — | — | — |
| EP4CE15 | C8L, C9L, I8L C6, C7, C8, I7 | I7N | I7N | C8L, C9L, I8L C6, C7, C8, I7, A7 | — | C8L, C9L, I8L C6, C7, C8, I7, A7 | — |
| EP4CE22 | C8L, C9L, I8L C6, C7, C8, I7, A7 | — | I7N | C8L, C9L, I8L C6, C7, C8, I7, A7 | — | — | — |
| EP4CE30 | — | — | — | — | — | C8L, C9L, I8L C6, C7, C8, I7, A7 | C8L, C9L, I8L C6, C7, C8, I7 |
| EP4CE40 | — | — | — | — | I7N | C8L, C9L, I8L C6, C7, C8, I7, A7 | C8L, C9L, I8L C6, C7, C8, I7 |
| EP4CE55 | — | — | — | — | I7N | C8L, C9L, I8L C6, C7, C8, I7 | C8L, C9L, I8L C6, C7, C8, I7 |
| EP4CE75 | — | — | — | — | I7N | C8L, C9L, I8L C6, C7, C8, I7 | C8L, C9L, I8L C6, C7, C8, I7 |
| EP4CE115 | — | — | — | — | — | C8L, C9L, I8L C7, C8, I7 | C8L, C9L, I8L C7, C8, I7 |

[Note]:

(1) C8L, C9L and I8L speed grade for 1.0 V core voltage.

(2) C6, C7, C8, I7, and A7 speed grades for 1.2 V core voltage.

Appendix 4. Cyclone IV components series of M9K module data width

| Model | Date width settle |
|---------------------------------|------------------------------------|
| Single-port or simple Dual-port | ×1, ×2, ×4, ×8/9, ×16/18, 和 ×32/36 |
| True Dual-port | ×1, ×2, ×4, ×8/9, 和 ×16/18 |


Appendix 5. Cyclone IV components series support I/O standard

| Model | I/O standard |
|------------------|--|
| Single-port I/O | LVTTL, LVCMOS, SSTL, HSTL, PCI, 和 PCI-X |
| Differential I/O | SSTL, HSTL, LVPECL, BLVDS, LVDS, mini-LVDS, RSDS, and PPDS |

Appendix 6. Cyclone IV components serial configuration solution

| Devices | Supported configuration solution |
|---------------|----------------------------------|
| Cyclone IV GX | AS, PS, JTAG, and FPP (Note 1) |
| Cyclone IV E | AS, AP, PS, FPP, and JTAG |

Appendix 7. Cyclone IV components package products information

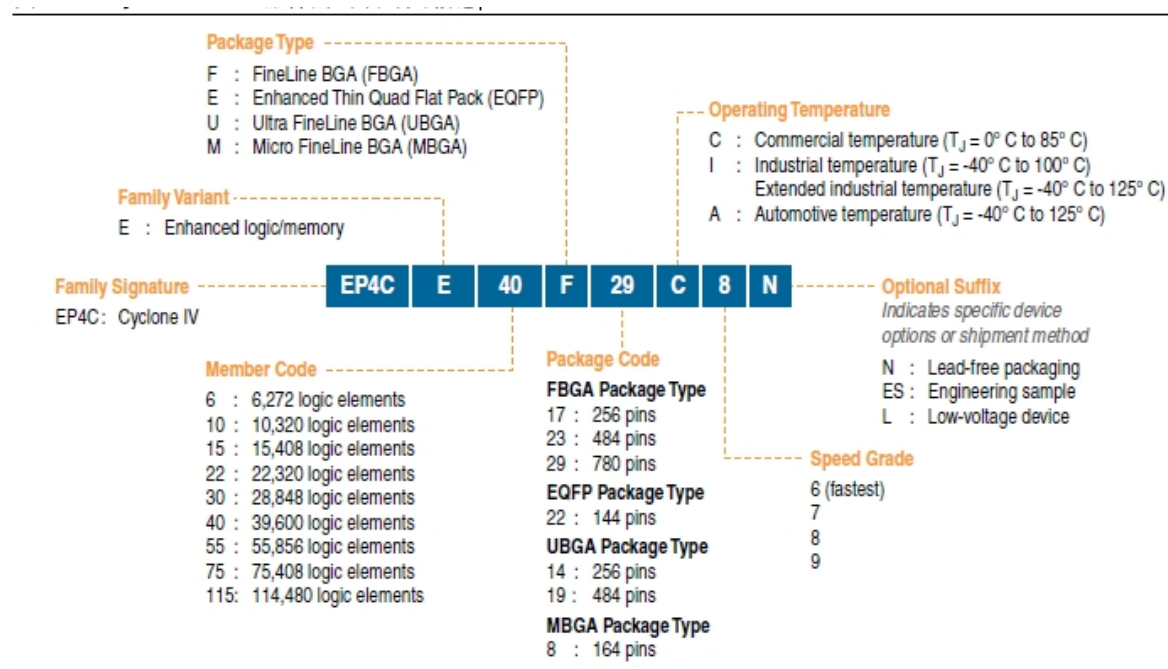

B. Terms and Abbreviations

| Abbreviation | Description |
|--------------|--------------------------------------|
| HDMI | High-Definition Multimedia Interface |
| YPbPr | Component Video Connector |
| CVBS | Composite Video Broadcast Signal |
| HDMI | High-Definition Multimedia Interface |
| | |

C. Safety Caution

In the process of use or repair any equipment by SYSTECH need to pay attention to the following safe guard. Terminal equipment shall inform the security of user information below. Otherwise, SYSTECH technology will not bear any because the user did not press these warnings and consequences.



Contact us:

SYSTECH

Address: 702, Block A, Tsinghua Hi-Tech Park, Nanshan, Shenzhen, China

Tel: 400-993-9390

Fax: 86-755-2603 0411

Post code: 518057

www.sysemed.com