

DESCRIPTION

A lampholder designed for use with two energy efficient 39W twin tube compact fluorescent lamps. For use with single circuit Halo and Lazer-by-Halo track systems. Ideal for wallwashing in retail stores, public areas and other commercial spaces. For ceiling mounted track only. Not suitable for use with four circuit track.

SPECIFICATION FEATURES

A--Quick Lock Adapter

Trac plug attaches anywhere along Halo Power-Trac. Two position conductor allows use in single circuit and either circuit of two circuit track. Visual polarity line assures proper grounding. Large bearing surface provides extra stability.

B--Yoke

Pre-tensioned adjustment mechanism allows lampholder to pivot vertically from 0° to ±80° as well as rotate horizontally. Unobtrusive angle

indicators are provided to enable consistent aiming.

C--Housing

Solid aluminum extrusion with die-cast aluminum end caps. No exposed rivets or screw heads. Standard electronic ballast provides energy efficiency, light weight and silent operation.

D--Reflector


Specular reflector provides precise optical control and low iridescence.

E--Louver (Optional)

One piece injection molded louvers with unique curved profile available in Low Iridescent, Specular Clear, White or Black. The parabolic louvers provide optimal brightness control and improve aesthetic appeal. Louver and reflector form a continuous light path with no gaps or obstructions.


Labels

UL listed and CSA certified for



L3239E

39W TWIN TUBE
COMPACT
FLUORESCENT
LAMPHOLDER
Power-Trac®

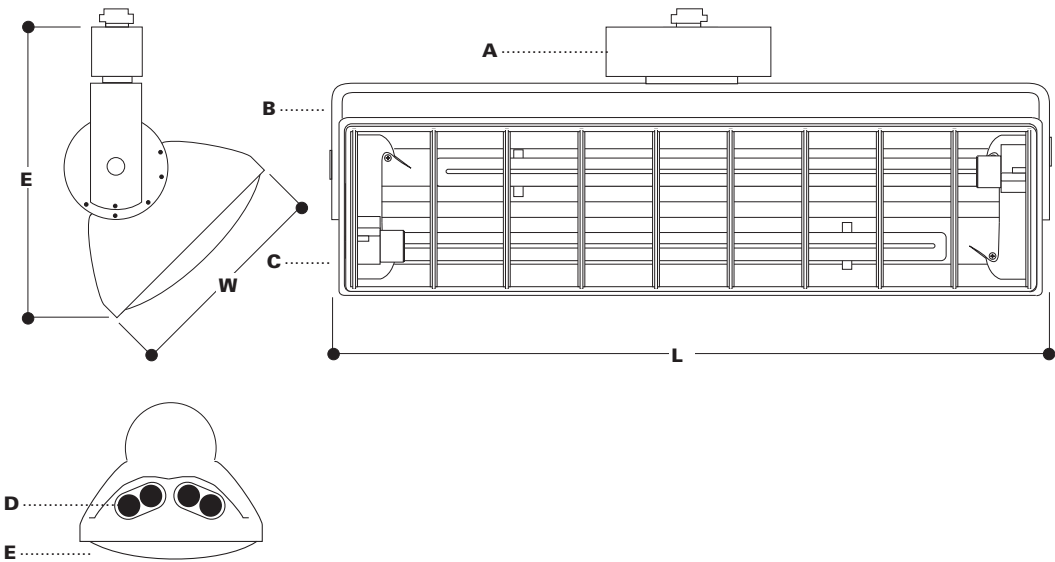

ORDERING INFORMATION

SAMPLE NUMBER: L3239EP-LVR3239SC

Complete unit consists of Lampholder and Finish (Louver is optional).

Lampholder	Finish	Louver (Optional)
L3239E		
L3239E=39W	P=White MB=Black	LVR3239P=White LVR3239MB=Black LVR3239SC=Specular



L3239E

For use with:
Two 39W twin Tube
Compact Fluorescent
Lamps

L =18 15/16" [481mm]
W=6" [152mm]
E =8 1/16" [205mm]

Sconce Energy Data L3239
Lamp(s): (2) 39W Triple Tube 4-pin
Ballast Type: Electronic
120V Input Watts: 75
Line Amps: 0.63
Power Factor: >.99
THD: <10% (15°F)
Min. Starting Temp: 50° F (10°C)
Sound Rating: A

NOTES:
For additional options please
consult factory.

Test No. H20061

L3239E-LVR3239SC
Specular Louver
 Lamp=(2) 39W TT
 Lumens=2,850
 45° Aiming Angle

Single Fixture 3' From Wall

DD	Distance From Fixture Along Wall						
	1'	2'	3'	4'	5'	6'	
1	104	84	50	24	12	5	2
2	87	73	48	26	14	7	4
3	55	49	35	22	13	8	4
4	33	30	24	17	11	7	4
5	20	19	15	12	8	6	4
6	12	11	10	8	6	5	3
7	8	8	7	6	5	4	3
8	5	5	5	4	4	3	2
9	4	4	4	3	3	2	2
10	3	3	3	2	2	2	2

Single Fixture 4' From Wall

DD	Distance From Fixture Along Wall						
	1'	2'	3'	4'	5'	6'	
1	59	52	37	23	13	7	4
2	54	49	37	24	14	9	5
3	44	41	32	22	14	9	6
4	31	29	24	18	13	9	6
5	21	20	17	14	10	7	5
6	14	14	12	10	8	6	4
7	10	10	9	7	6	5	4
8	7	7	6	5	5	4	3
9	5	5	4	4	4	3	3
10	4	4	3	3	3	2	2

Multiple Fixtures 3' Distance From Wall

DD	Spacing Between Fixtures											
	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'
1	155	150	155	127	104	127	115	71	115	109	49	109
2	142	141	142	115	103	115	101	74	101	94	53	94
3	104	105	104	83	80	83	71	61	71	64	47	64
4	71	72	71	56	56	56	47	45	47	42	35	42
5	47	48	47	38	38	38	32	31	32	28	26	28
6	32	33	32	26	26	26	22	22	22	19	19	19
7	22	23	22	19	19	19	16	16	16	14	14	14
8	16	17	16	14	14	14	12	12	12	10	10	10
9	12	12	12	10	11	10	9	9	9	8	8	8
10	9	9	9	8	8	8	7	7	7	6	6	6

Multiple Fixtures 4' Distance From Wall

DD	Spacing Between Fixtures											
	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'
1	86	82	86	74	62	74	67	46	67	64	35	64
2	84	84	84	72	66	72	64	50	64	60	38	60
3	75	75	75	63	60	63	56	47	56	51	37	51
4	59	59	59	49	48	49	43	39	43	39	32	39
5	44	45	44	37	37	37	32	31	32	29	25	29
6	33	33	33	28	28	28	24	24	24	21	20	21
7	24	25	24	21	21	21	18	18	18	16	15	16
8	18	18	18	15	16	15	13	13	13	12	12	12
9	13	14	13	12	12	12	10	11	10	9	9	9
10	10	11	10	9	10	9	8	8	8	7	7	7

Test No. H20063

L3239E-LVR3239P
White Louver
 Lamp=(2) 39W TT
 Lumens=2,850
 45° Aiming Angle

Single Fixture 3' From Wall

DD	Distance From Fixture Along Wall						
	1'	2'	3'	4'	5'	6'	
1	103	80	44	20	9	4	2
2	88	71	43	22	11	6	3
3	56	48	33	20	11	6	3
4	33	30	22	15	9	6	3
5	20	18	15	11	7	5	3
6	12	11	10	8	6	4	3
7	8	7	7	5	4	3	2
8	5	5	5	4	3	3	2
9	4	4	3	3	2	2	2
10	3	3	3	2	2	2	1

Single Fixture 4' From Wall

DD	Distance From Fixture Along Wall						
	1'	2'	3'	4'	5'	6'	
1	58	50	33	19	11	6	3
2	54	48	34	21	12	7	4
3	45	40	30	20	12	8	5
4	32	29	23	16	11	7	5
5	21	20	17	13	9	6	4
6	15	14	12	9	7	5	4
7	10	9	8	7	6	4	3
8	7	7	6	5	4	3	3
9	5	5	4	4	3	3	2
10	4	4	3	3	3	2	2

Multiple Fixtures 3' Distance From Wall

DD	Spacing Between Fixtures											
	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'
1	146	134	146	122	92	122	112	61	112	107	41	107
2	135	129	135	111	92	111	99	65	99	94	45	94
3	99	97	99	79	72	79	69	54	69	63	41	63
4	67	67	67	53	52	53	45	40	45	41	32	41
5	45	45	45	36	36	36	30	29	30	27	23	27
6	30	31	30	25	25	25	21	20	21	18	17	18
7	21	22	21	18	18	18	15	15	15	13	13	13
8	15	16	15	13	13	13	11	11	11	10	10	10
9	11	12	11	10	10	10	8	9	8	7	7	7
10	9	9	9	8	8	8	7	7	7	6	6	6

Multiple Fixtures 4' Distance From Wall

DD	Spacing Between Fixtures											
	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'
1	80	73	80	70	54	70	64	40	64	61	30	61
2	80	76	80	69	59	69	63	44	63	60	33	60
3	71	69	71	60	54	60	54	42	54	50	33	50
4	56	55	56	47	44	47	41	35	41	38	28	38
5	42	42	42	35	34	35	30	28	30	27	23	27
6	31	31	31	26	26	26	23	22	23	20	18	20
7	23	23	23	19	19	19	17	16	17	15	14	15
8	17	17	17	15	15	15	13	13	13	11	11	11
9	13	13	13	11	11	11	10	10	10	9	9	9
10	10	10	10	9	9	9	8	8	8	7	7	7

Test No. H20062

L3239E-LVR3239MB
Black Louver
 Lamp=(2) 39W TT
 Lumens=2,850
 45° Aiming Angle

Single Fixture 3' From Wall

DD	Distance From Fixture Along Wall						
	1'	2'	3'	4'	5'	6'	
1	86	64	33	14	5	2	1
2	75	60	35	17	8	3	2
3	48	41	27	15	8	4	2
4	29	26	19	12	7	4	2
5	17	16	12	9	6	4	2
6	10	10	8	6	4	3	2
7	6	6	5	4	3	2	2
8	4	4	4	3	3	2	1
9	3	3	3	2	2	1	1
10	2	2	2	2	2	1	1

Single Fixture 4' From Wall

DD	Distance From Fixture Along Wall						
	1'	2'	3'	4'	5'	6'	
1	48	40	25	14	7	3	2
2	46	40	27	16	9	5	2
3	38	34	25	16	9	5	3
4	27	25	19	13	9	5	3
5	18	17	14	10	7	5	3
6	13	12	10	8	6	4	3
7	8	8	7	6	4	3	2
8	6	6	5	4	3	3	2
9	4	4	4	3	3	2	2
10	3	3	3	2	2	2	1

Multiple Fixtures 3' Distance From Wall

DD	Spacing Between Fixtures											
	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'
1	114	101	114	100	67	100	90	43	90	87	27	87
2	110	104	110	91	73	91	82	50	82	78	33	78
3	81	80	81	65	58	65	57	43	57	53	31	53
4	55	55	55	43	42	43	37	32	37	33	25	33
5	37	37	37	29	29	29	25	23	25	22	19	22
6	24	25	24	20	20	20	16	16	16	14	13	14
7	17	17	17	14	14	14	12	12	12	10	10	10
8	12	12	12	10	10	10	9	9	9	8	7	8
9	9	9	9	8	8	8	7	7	7	6	6	6
10	7	7	7	6	6	6	5	5	5	5	5	5

Multiple Fixtures 4' Distance From Wall

DD	Spacing Between Fixtures											
	4'			5'			6'			7'		
1	62	54	62	55	39	55	51	28	51	49	20	49
2	64	60	64	55	45	55	51	33	51	48	24	48
3	58	56	58	50	43	50	45	33	45	42	25	42
4	46	45	46	38	35	38	34	28	34	31	22	31
5	34	34	34	29	28	29	25	22	25	22	18	22
6	25	25	25	21	21	21	18	17	18	16	15	16
7	19	19	19	16	16	16	14	13	14	12	11	12
8	14	14	14	12	12	12	10	10	10	9	9	9
9	10	11	10	9	9	9	8	8	8	7	7	7
10	8	8	8	7	7	7	6	6	6	5	5	5