

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

| Uniframe™ Compact Fluorescent Performance Series Reflector Trims |                                                                                                                                             | Compatible Frame-In Kits<br>(See Individual Frame-In Kit Specification Sheets) |                                                                                                         |                 |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------|
| Catalog No.                                                      | Description                                                                                                                                 | Catalog No.                                                                    | Installation Type                                                                                       | Lamping         |
| <b>1001HCL</b><br><b>1001HCD</b><br><b>1001HWH</b>               | 5" Horizontal Open Downlight – Specular Clear<br>5" Horizontal Open Downlight – Clear Diffuse<br>5" Horizontal Open Downlight – Matte White | <b>1001F13U</b>                                                                | Uniframe™ Non-IC 120/277v                                                                               | 13w Quad/Triple |
|                                                                  |                                                                                                                                             | <b>1001F18U</b><br><b>1001FR18U</b><br><b>1001F18UEM</b>                       | Uniframe™ Non-IC 120/277v<br>Uniframe™ Non-IC Remodeler 120/277v<br>Uniframe™ Non-IC Emergency 120/277v | 18w Triple      |
|                                                                  |                                                                                                                                             | <b>1001F26U</b><br><b>1001FR26U</b><br><b>1001F26UEM</b>                       | Uniframe™ Non-IC 120/277v<br>Uniframe™ Non-IC Remodeler 120/277v<br>Uniframe™ Non-IC Emergency 120/277v | 26w Triple      |
|                                                                  |                                                                                                                                             | <b>1001FD26L1</b><br><b>1001FD26L2</b>                                         | Uniframe™ Non-IC Lutron Dimming 120v<br>Uniframe™ Non-IC Lutron Dimming 277v                            | 26w Triple      |
|                                                                  |                                                                                                                                             | <b>1001FD26MX1</b><br><b>1001FD26MX2</b>                                       | Uniframe™ Non-IC Advance Mark10 Dimming 120v<br>Uniframe™ Non-IC Advance Mark10 Dimming 277v            | 26w Triple      |
|                                                                  |                                                                                                                                             | <b>1001FD13M7U</b>                                                             | Uniframe™ Non-IC Advance Mark7 Dimming 120/277v                                                         | 13w Triple      |
|                                                                  |                                                                                                                                             | <b>1001FD18M7U</b>                                                             | Uniframe™ Non-IC Advance Mark7 Dimming 120/277v                                                         | 18w Triple      |
|                                                                  |                                                                                                                                             | <b>1001FD26M7U</b>                                                             | Uniframe™ Non-IC Advance Mark7 Dimming 120/277v                                                         | 26w Triple      |
|                                                                  |                                                                                                                                             | <b>1001F13ICU/N</b>                                                            | Performance IC 120/277v                                                                                 | 13w Quad/Triple |
|                                                                  |                                                                                                                                             | <b>1001F18ICU/N</b>                                                            | Performance IC 120/277v                                                                                 | 18w Triple      |
|                                                                  |                                                                                                                                             | <b>1001F26ICU/N</b>                                                            | Performance IC 120/277v                                                                                 | 26w Triple      |
|                                                                  |                                                                                                                                             | <b>1001FDICMX1/N</b>                                                           | Performance IC Advance Mark10 Dimming 120v                                                              | 26w Triple      |
|                                                                  |                                                                                                                                             | <b>1001FDICMX2/N</b>                                                           | Performance IC Advance Mark10 Dimming 277v                                                              | 26w Triple      |

### Features

- Reflector:** Formed aluminum. Matte flange.
- Finishes:** CL = Specular Clear (Iridescent Free coating)  
CD = Clear Diffuse  
WH = Matte White Paint
- Performance Data:** 60° Cutoff angle.  
See attached photometric reports for distribution and efficiency data.  
Go to [www.lightolier.com](http://www.lightolier.com) for .IES files.

### Labels


cULus Listed. Suitable for Damp Locations. I.B.E.W.

| Job Information  | Type: |
|------------------|-------|
| <b>Job Name:</b> |       |
| <b>Cat. No.:</b> |       |
| <b>Lamp(s):</b>  |       |
| <b>Notes:</b>    |       |

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
[www.lightolier.com](http://www.lightolier.com) © 2008 Philips Group • D0808



**26W TRIPLE TUBE LAMP**, LUMEN RATING = 1710 LMS, ELECTRONIC BALLAST, CL FINISH TRIM

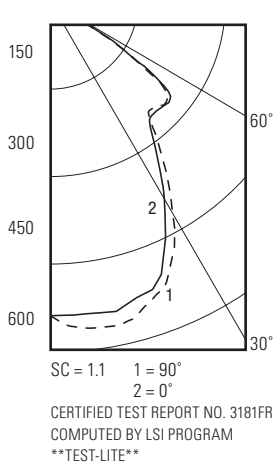

| CANDLEPOWER SUMMARY |       |        | ZONAL LUMEN SUMMARY |        | ZONAL LUMENS AND PERCENTAGES |        |       |       |
|---------------------|-------|--------|---------------------|--------|------------------------------|--------|-------|-------|
| Angle               | 0° CP | 90° CP | Zone                | Lumens | Zone                         | Lumens | %Lamp | %Fixt |
| 0                   | 538   | 538    | 0-10                | 51.35  | 0-30                         | 409.25 | 23.9  | 41    |
| 5                   | 518   | 561    | 10-20               | 148.05 | 0-40                         | 614.89 | 36    | 61.7  |
| 10                  | 506   | 564    | 20-30               | 209.85 | 0-60                         | 989.42 | 57.9  | 99.2  |
| 15                  | 479   | 561    | 30-40               | 205.64 | 0-90                         | 997.25 | 58.3  | 100   |
| 20                  | 454   | 535    | 40-50               | 204.86 | 90-120                       | 0      | 0     | 0     |
| 25                  | 434   | 494    | 50-60               | 169.66 | 90-130                       | 0      | 0     | 0     |
| 30                  | 380   | 431    | 60-70               | .7     | 90-150                       | 0      | 0     | 0     |
| 35                  | 314   | 347    | 70-80               | .8     | 90-180                       | 0      | 0     | 0     |
| 40                  | 279   | 273    | 80-90               | .03    | 0-180                        | 997.25 | 58.3  | 100   |
| 45                  | 271   | 255    | 90-100              | 0      | ** Efficiency = 58.3% **     |        |       |       |
| 50                  | 259   | 261    | 100-110             | 0      |                              |        |       |       |
| 55                  | 217   | 231    | 110-120             | 0      |                              |        |       |       |
| 60                  | 25    | 42     | 120-130             | 0      |                              |        |       |       |
| 65                  | 3     | 4      | 130-140             | 0      |                              |        |       |       |
| 70                  | 1     | 2      | 140-150             | 0      |                              |        |       |       |
| 75                  | 1     | 1      | 150-160             | 0      |                              |        |       |       |
| 80                  | 0     | 0      | 160-170             | 0      |                              |        |       |       |
| 85                  | 0     | 0      | 170-180             | 0      |                              |        |       |       |
| 90                  | 0     | 0      |                     |        |                              |        |       |       |

|         |                                                         | COEFFICIENTS OF UTILIZATION |    |     |    |     |    |     |    |    |    |
|---------|---------------------------------------------------------|-----------------------------|----|-----|----|-----|----|-----|----|----|----|
|         |                                                         | 80%                         |    | 70% |    | 50% |    | 30% |    |    |    |
| Ceiling | Wall                                                    | 70                          | 50 | 30  | 10 | 50  | 10 | 50  | 10 | 50 | 10 |
| RCR     | Zonal Cavity Method - Effective Floor Reflectance = 20% |                             |    |     |    |     |    |     |    |    |    |
| 0       | 0                                                       | 69                          | 69 | 69  | 69 | 68  | 68 | 65  | 65 | 62 | 62 |
| 1       | 1                                                       | 65                          | 63 | 61  | 60 | 62  | 59 | 60  | 57 | 57 | 55 |
| 2       | 2                                                       | 61                          | 57 | 54  | 52 | 56  | 51 | 54  | 50 | 52 | 49 |
| 3       | 3                                                       | 56                          | 52 | 48  | 45 | 51  | 44 | 49  | 44 | 48 | 43 |
| 4       | 4                                                       | 52                          | 47 | 42  | 39 | 46  | 39 | 45  | 39 | 43 | 38 |
| 5       | 5                                                       | 49                          | 42 | 38  | 35 | 42  | 35 | 41  | 34 | 40 | 34 |
| 6       | 6                                                       | 45                          | 39 | 34  | 31 | 38  | 31 | 37  | 31 | 36 | 30 |
| 7       | 7                                                       | 42                          | 35 | 31  | 28 | 35  | 28 | 34  | 30 | 27 | 33 |
| 8       | 8                                                       | 39                          | 33 | 28  | 25 | 32  | 28 | 25  | 31 | 28 | 25 |
| 36      | 36                                                      | 37                          | 30 | 26  | 23 | 30  | 26 | 23  | 29 | 25 | 23 |
| 10      | 10                                                      | 35                          | 28 | 24  | 21 | 28  | 21 | 27  | 23 | 21 | 26 |

Determined In Accordance With Current IES Published Procedures  
 Luminaire Input Watts = 26

|                        |              |
|------------------------|--------------|
| <b>Job Information</b> | <b>Type:</b> |
|------------------------|--------------|

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • D0808