

READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.

INSTRUCTION SHEET NO.

IS:5412

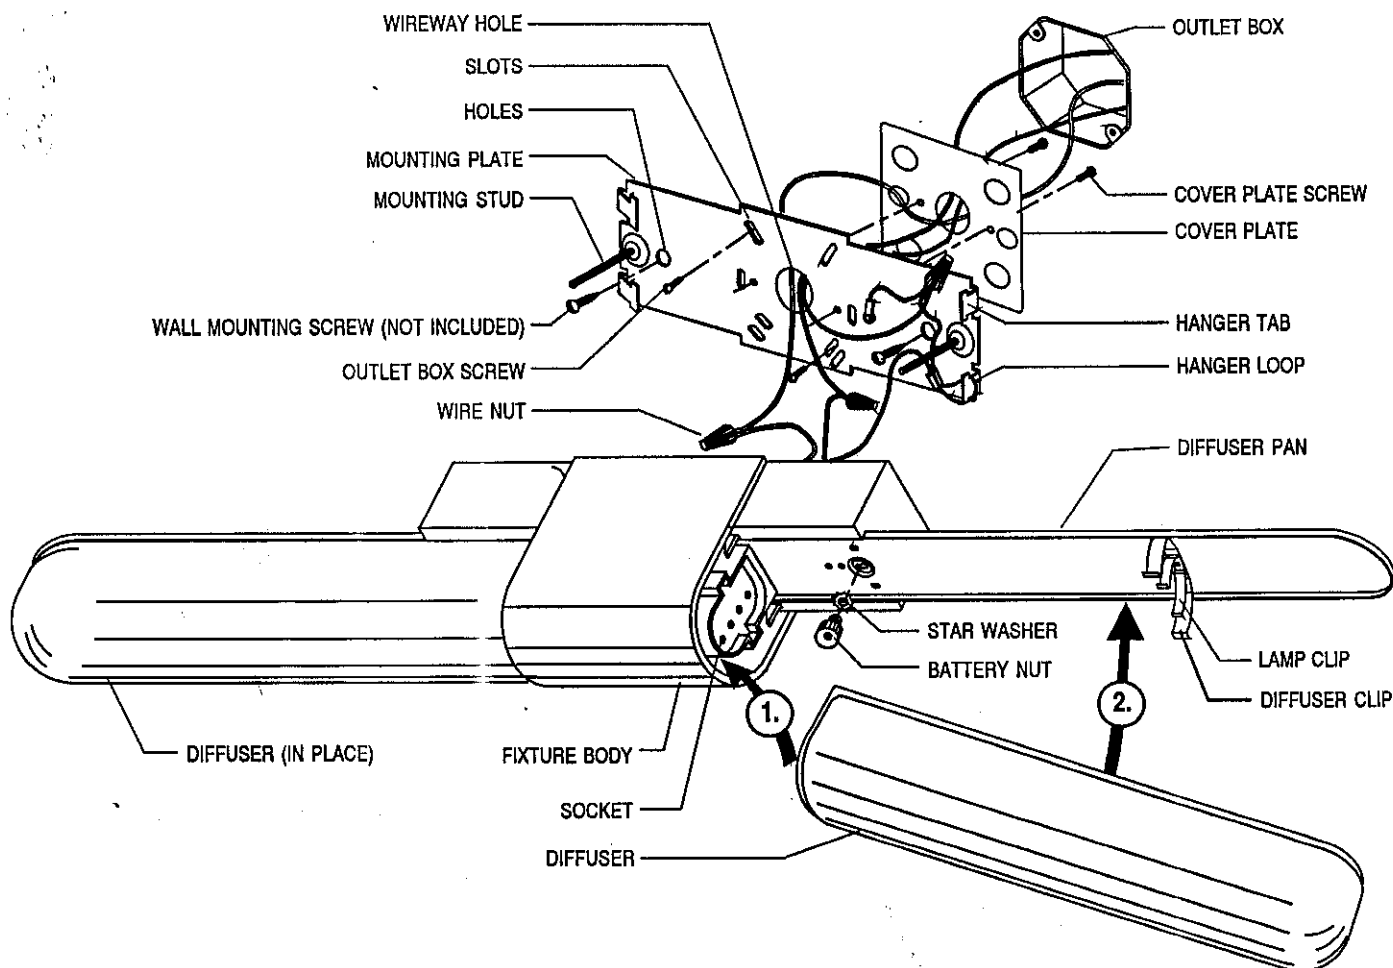
1291

**INSTRUCTIONS FOR INSTALLATION OF HELIOS
COVERS FIXTURES: 5412 and 5413****A. FOR OCTAGONAL OUTLET BOX MOUNTING.**

1. Screw COVER PLATE to the backside of MOUNTING PLATE with screws provided.
2. Pull supply wires from outlet box through the WIREWAY HOLE in MOUNTING PLATE.
3. Using outlet box screws (provided with outlet box) secure MOUNTING PLATE to outlet box using the appropriate SLOTS in MOUNTING PLATE.
4. Using the HOLES next to each MOUNTING STUD on MOUNTING PLATE secure MOUNTING PLATE directly to wall using wood screws, toggle bolts, or alternate fastener (not provided) depending on wall material.

B. FOR HORIZONTALLY MOUNTED RECTANGULAR GEM OR SWITCH BOXES. (Discard Coverplate)

1. Pull supply wires from outlet box through the WIREWAY HOLE in MOUNTING PLATE.
2. Using outlet box screws (provided with outlet box) secure MOUNTING PLATE to outlet box using the appropriate SLOTS in MOUNTING PLATE.
3. Using the HOLES next to each MOUNTING STUD on MOUNTING PLATE secure MOUNTING PLATE directly to wall using wood screws, toggle bolts, or alternate fastener (not provided) depending on wall material.

**LIGHTOLIER®** SECAUCUS, NEW JERSEY 07096
MONTREAL, QUEBEC, CANADA

A. INSTALLATION OF FIXTURE BODY

1. Remove both DIFFUSERS from FIXTURE BODY by gently grasping DIFFUSER towards end and pulling directly away from DIFFUSER PAN.
2. Hook HANGER LOOP over one of the HANGER TABS on MOUNTING PLATE and allow FIXTURE BODY to hang.
3. Make connections black fixture leads or fixture leads without tracer marks to black (hot) supply leads; white fixture leads or fixture leads with tracer marks to white (neutral) supply leads. Uninsulated fixture wires are ground wires and all must be connected to grounding terminal or wire in "outlet box". Use wirenuts (local hardware item).

CAUTION: Push supply wires and wirenut connections back into outlet box.

4. Position FIXTURE BODY over MOUNTING PLATE and gently push FIXTURE BODY against wall until both MOUNTING STUDS come through the SLOTS in DIFFUSER PAN. Secure in place using STAR WASHERS and BATTERY NUTS.

CAUTION: Make certain that no wires are pinched between mounting plate and fixture body.

5. Install recommended lamps by engaging lamp base into SOCKET and then snapping into LAMP CLIP.
6. Position open end of DIFFUSER into FIXTURE BODY ① and gently push DIFFUSER back against DIFFUSER PAN until DIFFUSER snaps into place ② onto DIFFUSER CLIP. Repeat for second DIFFUSER.

NOTE: Support the back side of DIFFUSER PAN before snapping DIFFUSER into place.

CAUTION: Use lamp types/wattages as marked on fixture. For horizontal mounting only.