


Page 1 of 1

Fluorescent Bath Series

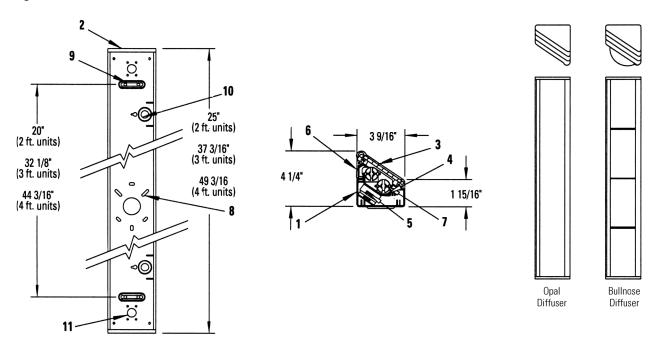

Ordering Information

Catalog Number		Nominal Length	Lamp	Ballast	Finishes		
Bullnose	Opal Diffuser						
46824PB	46821PB	2 ft.	(2) 17W T8	Universal Electronic 120/277V	Polished Brass (PB)		
46534PB	46531PB	3 ft.	(1) 25W T8	Universal Electronic 120/277V	*For Polished Chrome Finish use		
46834PB	46831PB	3 ft.	(2) 25W T8	Universal Electronic 120/277V	suffix "PC" after catalog number		
46844PB	46841PB	4 ft.	(2) 32W T8	Universal Electronic 120/277V	instead of "PB".		

Features

- 1. Housing: Die-formed 22 gauge prefinished steel.
- 2. End Cap: (2) Die-cast zinc alloy.
- Diffuser Assembly: Extruded aluminum side rails with die cast zinc alloy end covers. Silicone rubber gasket provided to eliminate light leaks. Stainless steel spring clips provide easy access for relamping. See chart for diffuser options.
- 4. Reflector: Die formed 22 gauge steel, Reflective white finish.
- 5. Ballast: Universal Electronic, high power factor.
- 6. Side Diffuser: Extruded UV stabilized acrylic.
- Lamp: 17W, 25W, or 32W T-8 triphosphor fluorescent (medium bi-pin base).(by others)
- 8. Mounting: Center knock-out pattern for direct mounting to 3: or 4" octagonal Gem outlet boxes.
- 9. Auxiliary Mounting: Provided for direct mounting to wall surface.
- Wiring Kit Connection Detail: For use with Lightolier Wall Wiring Kit -Catalog Number 46700.
- 11. In-Line Connection Detail: Provided for Installations where fixtures are to be mounted end to end. Linear connection and hardware provided with each fixture.

Electrical

Fluorescent:	1-Ligh 25W	t	2-Ligh 17W	t	2-Ligh 25W	t	2-Ligh 32W	t
Ballast: Electronic	120	277	120	277	120	277	120	277
Total Input Watts	16	17	29	30	43	43	57	56
Max. Line Current (amps)	14	.07	.24	.11	.36	.16	.48	.21
Power Factor	>.97	>.97	>.97	>.97	>.97	>.97	>.97	>.97
Ballast Factor	.87	.87	.87	.87	.87	.87	.87	.87
THD	<10%	<10%	<10%	<10%	<10%	<10%	<10%	<10%
Min. Starting Temps.	-18°C	-18°C	-18°C	-18°C	-18°C	-18°C	-18°C	-18°C
	(-0°F)	(-0°F)	(-0°F)	(-0°F)	(-0°F)	(-0°F)	(-0°F)	(-0°F)

Mounting

Horizontal or Vertical wall mount only.

Labels

UL listed suitable for damp locations.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902