
Page 1 of 1

Pattern Marker (Square in Square) LED

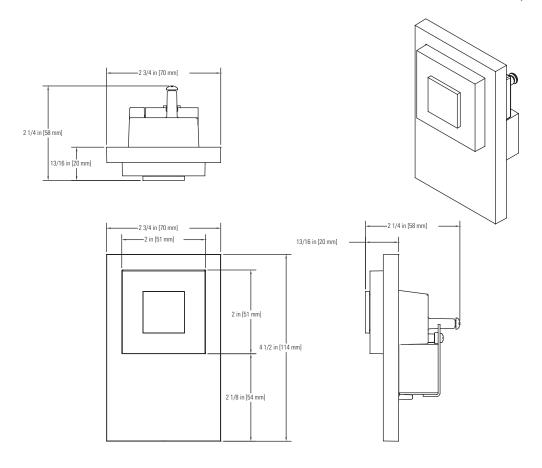

Catalog Number	Finish	Lamp	Wattage	Color Temp	Voltage
DMP01W	White	LED	1W	3000K	120-240V
DMP01SA	Satin Aluminum	LED	1W	3000K	120-240V

Features

- 1. Heat Sink/Driver Housing: Die cast aluminum.
- 2. Lens: Injection molded acrylic sandblasted with clear polished edges, developed for optimum optical output.
- 3. Face Plate: Die cast aluminum.
- 4. Light Shield: Die cut .020" thick aluminum (not shown).
- 5. Decorative Light Diffuser: Die cast aluminum.
- 6. Switch Box Mounting Plate: 18ga. C.R.S. zinc plated, for mounting to a 3 1/2" deep switch box.

Electrical

LED: (1) 1W 3000K white LED. Average expected life, under normal operating conditions is 50,000 hours with lumen maintenance of 70% of original light output.

Driver: Class 2 power supply.

Voltage: 120V **Output Wattage:** 1 W Input Current (max.): 65 mA Frequency: 50/60 Hz Output Voltage (VDC): $4\ \lor$ **Constant Current:** 350 mA

Finish

Satin aluminum with protective clearcoat. Matte white powder coat.

Labels

cULus Listed. Suitable for Dry Locations. Wall mount only.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • B1208