
Page 1 of 1 Linear Step LED

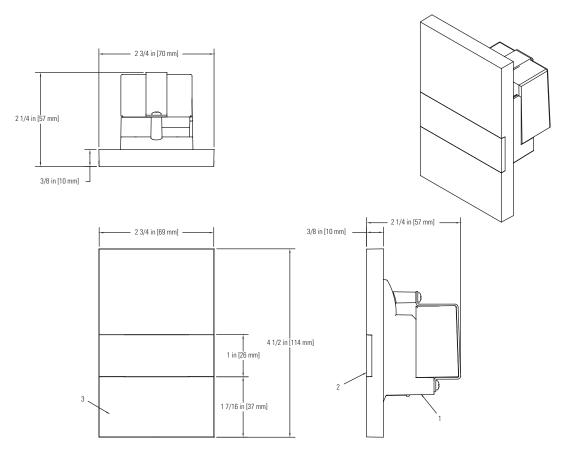

Catalog Number	Finish	Lamp	Wattage	Color Temp	Voltage
DSL01W	White	LED	4W	3000K	120-240V
DSL01SA	Satin Aluminum	LED	4W	3000K	120-240V

Note: Order Glass/Diffuser separately.

## **Features**

- 1. Heat Sink/Driver Housing: Die cast aluminum.
- Lens: Injection molded polycarbonate clear, developed for optimum optical output.
- 3. Face Plate: Die cast aluminum.
- **4. Switch Box Mounting Plate:** 18ga. C.R.S. zinc plated, for mounting to a 3 1/2" deep switch box. (Not shown)

## **Electrical**

**LED:** (1) 4W 3000K white LED. Average expected life, under normal operating conditions is 50,000 hours with lumen maintenance of 70% of original light output.

**Driver:** Class 2 power supply.

 Voltage:
 120V

 Output Wattage:
 5 W

 Input Current (max.):
 100 mA

 Frequency:
 50/60 Hz

 Output Voltage (VDC):
 12 V

 Constant Current:
 500 mA

## **Finish**

Satin aluminum with protective clearcoat. Matte white powder coat.

## Labels

cULus Listed. Suitable for Dry Locations. Wall mount only.

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • B1208

