


Calculite® Evolution Recessed Downlighting **C4120RM**

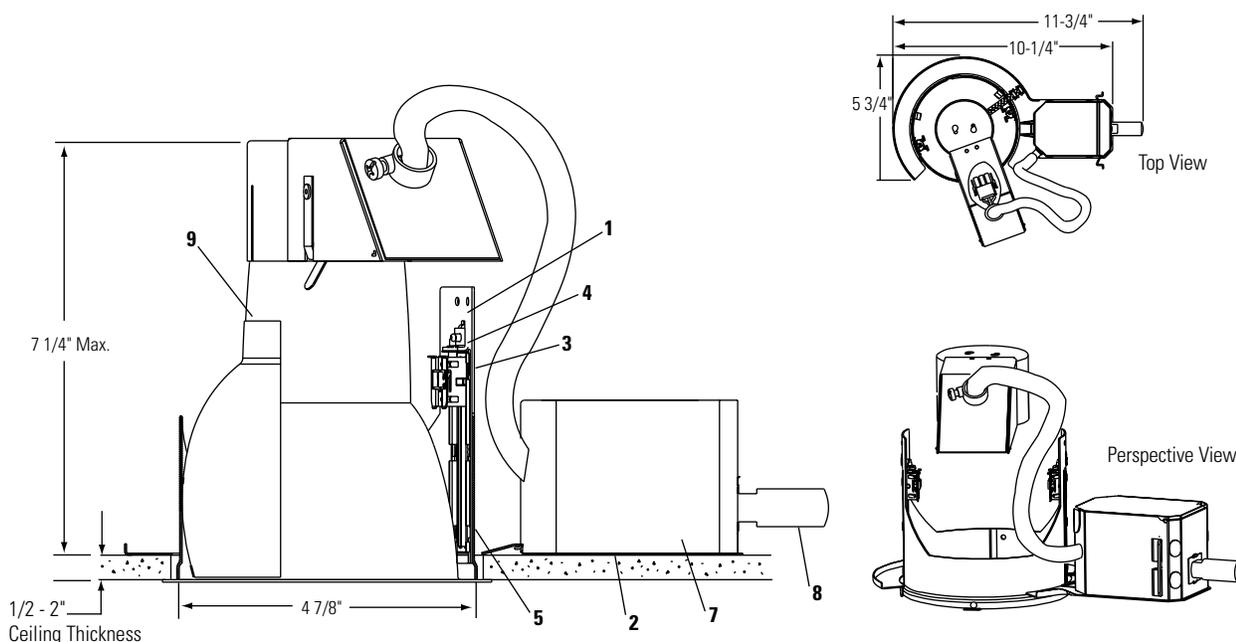

Ceiling Cutout: 5" (127 mm) Dia.

Frame-In Kit	Reflector Trim			
C4120RM	Open Downlight	Open Downlight	Open Downlight	Open Wall Washer
	C4AD 100W A19, MB19 100W BT15	C4P20D 50W PAR20 75W PAR16 75W BR19, R20	C4P30D 75W PAR30 Short Neck	C4AW/C4ACW/C4ADW 100W A19, MB19 100W BT15

Features

- Housing:** Rolled galvanized steel, 0.04" (18 ga.). Removable for access to J-Box and transformer.
- Mounting Frame:** Die-formed steel, 0.03" (22 ga.) galvanized steel. Accommodates existing ceilings up to 2" thick.
- Locking Clips:** Quick-Lock clips provide ratcheting coarse adjustment for ceiling thickness from 1/2" to 2" thick.
- Fine Adjustment Screws:** Provide pressure to clamp the ceiling material for secure mounting.
- Retaining Springs:** Precision-tooled steel springs secure reflector trim to housing for quick, tool-less installation.
- Snap-In Connectors:** Keyed to accept power and socket harnesses, which are provided with reflector trim.
- Junction Box:** 0.03" (22 ga.) galvanized steel. UL listed for 90°C supply connection. Integral cable clamps permit attachment of #14 or #12 ga. non-metallic cable without tools or additional connectors.
- Thermal Protector:** Meets NEC and UL requirements. Insulation must be kept 3" away from fixture sides and wiring compartments and must not be placed above fixture in a manner which will entrap heat.
- Reflector Trim:** Compatible reflector trims are listed above. See separate reflector trim specification sheets for complete catalog numbers, finish, and details.

Labels

UL Listed (suitable for damp locations), I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2003 Genlyte Thomas Group LLC (Lightolier Division) • A0403

LIGHTOLIER®