





Calculite® HID Adjustable Accent **C6T6A-MHT6RF**

Page 1 of 2

6" Aperture, T6 Ceramic Metal Halide, Flood



Flood Upper Reflector

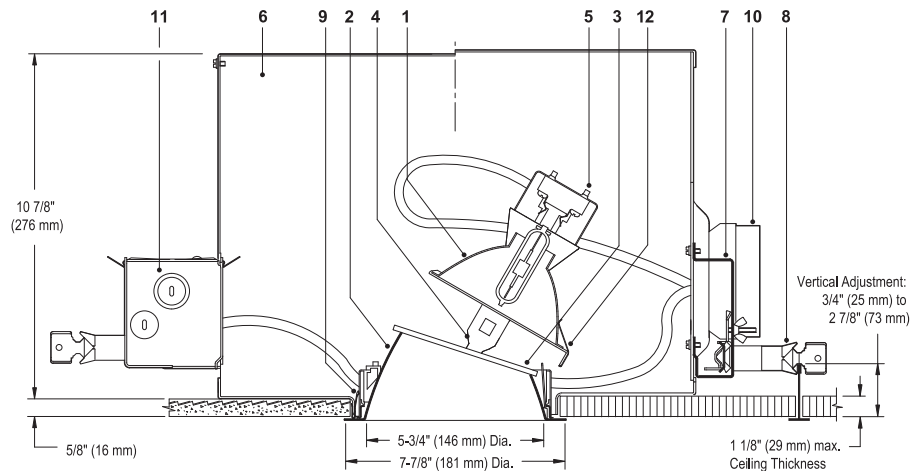

Ceiling Cutout: 6 9/16" (167mm) Dia.

For Complete Fixture Order: Trim Kit + Upper Reflector (MHT6RF) + Frame-In Kit. Each Sold Separately.

Trim Kit + Flood Upper Reflector		Frame-In Kit	Lamp		
C6T6A	+ MHT6RF (Flood Upper Reflector)	C6A39T6E1	Electronic 120V	39W T6	Ceramic MH
CLW	Specular Clear, White Painted Flange	C6A39T6E2	Electronic 277V	39W T6	Ceramic MH
CLP	Specular Clear, Matching Flange	C6A70T6E1	Electronic 120V	70W T6	Ceramic MH
CCDW	Comfort Clear Diffuse, White Painted Flange	C6A70T6E2	Electronic 277V	70W T6	Ceramic MH
CCDP	Comfort Clear Diffuse, Matching Flange	C6A15T6E1	Electronic 120V	150W T6	Ceramic MH
CCZW	Champagne Bronze, White Painted Flange	C6A15T6E2	Electronic 277V	150W T6	Ceramic MH
CCZP	Champagne Bronze, Matching Flange		Magnetic 120V/277V	150W T6	Ceramic MH

Features

- Flood Upper Reflector:** Specular textured aluminum; provides 40° beam. Interchangeable with 12° Spot (MHT6RS) and 25° Narrow Flood (MHT6RNF); see spec sheets C6T6A-MHT6RS and C6T6A-MHT6RNF.
- Trim Kit:** Low brightness aperture cone; anodized aluminum, self-flanged in painted white or aperture-matching polished flange. Consult factory for other finishes.
- Lamp Shield:** High-temperature glass as required by code; captive during re-lamping.
- Trim Kit Adjustment Mechanism:** Provides 40° vertical tilt, 360° horizontal rotation; lockable. Patented EZ-Aim Helical Drive System provides fast and accurate hot aiming with Philips screwdriver.
- Socket Housing:** Galvanized steel, pre-wired with G12 pulse rated socket. Snaps onto yoke for secure attachment without tools; unitized construction assures proper alignment of lamp to optics for consistent optical performance.
- Frame Housing:** Steel, 0.029" (22-Ga.), matte black finish. Removable cover for top re-lamping.
- Frame Vertical Adjustment Mechanism:** Accommodates mounting to virtually any ceiling system using pre-installed mounting bars, or 1/2" EMT tubing (by others). Single locking feature secures all adjustments. Alignment holes and markings allow fixture to be pre-set prior to installation. Final adjustment can be made from below from inside fixture.
- Mounting Bars:** Galvanized steel, 0.048" (18-ga.), pre-installed telescoping bars extend to 30" long and lock securely into position. Built-in locking tabs provide positive attachment to common T-bar systems. Self-centering feature simplifies installation in 24" O.C. grid systems. Attaches to steel or wood joists without accessories.
- Retention Springs:** Rust resistant springs secure trim for quick, tool-less installation.
- Ballast / Cover Assembly:** Accessible from below and removable without tools for inspection and ballast replacement.
- Junction Box:** 0.059" (16-ga.) galvanized steel. UL listed for 8 No. 12 AWG, 90°C through branch circuit conductors. Allows inspection from below.
- Accessory Holder:** (Not Shown) Sold separately catalog # CAH6; die-formed steel, matte black finish, slide-in installation. Accepts up to two 4 3/4" dia. media.
- Thermal Protector:** (Not Shown) Meets NEC and UL requirements. Do not install insulation above nor within 3" (76mm) of any part of the luminaire.

Electrical

Electronic Ballast: 120V or 277V, 50/60 Hz., enclosed, high power factor, T.H.D <15%, thermally and transient protected, RMI/RFI complies with FCC Part 18 on-consumer equipment, shut-down circuit at end of lamp life, sound rating "A", -5°F (-20°F for 150W) minimum starting temperature, Type 1 outdoor rating.

***150W Magnetic Ballast:** 120V/277V dual voltage, 60 Hz., enclosed and potted, HX-HPF circuit type, high power factor, sound rating "B", -20° F minimum starting temperature, Type 1 Outdoor rating.

Ballast	ANSI Code	Voltage	Max. Amps	Input Watts
39W MH	M130	120/277	0.39/0.17	44
70W MH	M139	120/277	0.67/0.28	78
150W MH	M142	120/277	1.40/0.60	167
* 150W MH	M142	120/277	3.70/1.60	180

Options and Accessories

Chicago Plenum: Consult Factory

Fuse (magnetic ballast): Add suffix **F1** or **F2** to Frame-In Kit (F1=120V, F2=277V)

Labels

UL (Suitable for Damp Locations), CSA, I.B.E.W.

For 150W, install fixtures with minimum spacing between:

- Center-to-center of adjacent luminaires: 2 feet.
- Top of luminaire to overhead building member: 1/2 inch.
- Luminaire center to side building member: 1 foot.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte company

www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710



We reserve the right to change details of design, materials and finish.

© 2006 Genlyte Group LLC • B0406


LIGHTOLIER®



(FC) is initial footcandles at center of beam. Beam length (L) and beam width (W) are to where the candlepower is reduced to 50% of the center beam candlepower. (C) is the distance to the center of the beam.



CANDLEPOWER DISTRIBUTION

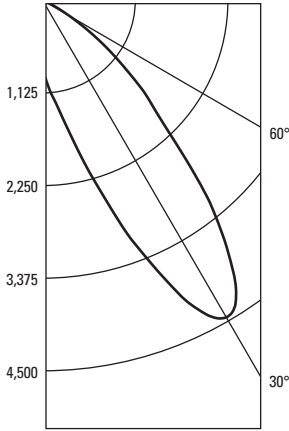

ANGLE	WALL
0	828
5	1125
10	1484
15	2129
20	3032
25	3951
30	4448
35	4042
40	3092
45	2004
50	1365
55	804
60	357
65	109
70	12
75	0
80	0
85	0
90	0

39W T6 - FLOOD UPPER REFLECTOR

AIMED 30 deg. TOWARD WALL

LAMP: 39W T6 MH, PHILIPS
LUMEN RATING: 3400 LMS.
CBCP: 4448
Beam Angle: 28
AROMAT 39W ELECTRONIC BALLAST

DATE: MAR 9, 2004
CERTIFIED TEST REPORT NO. 2528FR


COMPUTED BY LSI PROGRAM
TEST-LITE

30° Aiming Angle Horizontal Surface

D	C	FC	L	W
6'	3.5'	80	4.1'	3.5'
8'	4.6'	45	5.4'	4.6'
10'	5.8'	29	6.8'	5.8'
12'	6.9'	20	8.1'	6.9'
15'	8.7'	13	10.2'	8.6'

30° Aiming Angle Vertical Surface

D	C	FC	L	W
2'	3.5'	139	4.9'	2.0'
3'	5.2'	62	7.4'	3.0'
4'	6.9'	35	9.8'	4.0'
6'	10.4'	15	14.7'	6.0'
8'	13.9'	9	19.6'	8.0'

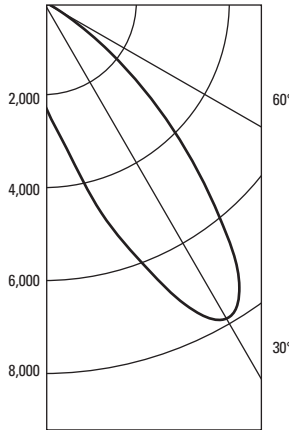

ANGLE	WALL
0	2129
5	2598
10	3416
15	4621
20	5826
25	7165
30	7886
35	7331
40	5692
45	4040
50	2544
55	1262
60	460
65	113
70	12
75	2
80	0
85	0
90	0

70W T6 - FLOOD UPPER REFLECTOR

AIMED 30 deg. TOWARD WALL

LAMP: 70W T6 MH, PHILIPS
LUMEN RATING: 6600 LMS.
CBCP: 7886
Beam Angle: 33
AROMAT 70W ELECTRONIC BALLAST

DATE: MAR 13, 2004
CERTIFIED TEST REPORT NO. 2527FR


COMPUTED BY LSI PROGRAM
TEST-LITE

30° Aiming Angle Horizontal Surface

D	C	FC	L	W
8'	4.6'	80	6.5'	5.5'
10'	5.8'	51	8.1'	6.8'
12'	6.9'	36	9.8'	8.2'
15'	8.7'	23	12.2'	10.3'
20'	11.5'	13	16.3'	13.7'

30° Aiming Angle Vertical Surface

D	C	FC	L	W
3'	5.2'	110	9.6'	3.6'
4'	6.9'	62	12.9'	4.7'
6'	10.4'	27	19.3'	7.1'
8'	13.9'	15	25.7'	9.5'
12'	20.8'	7	38.6'	14.2'

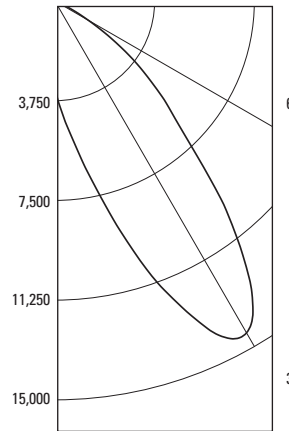

ANGLE	WALL
0	3264
5	4588
10	6230
15	8522
20	11273
25	13598
30	14410
35	12748
40	9706
45	6584
50	4740
55	3021
60	1451
65	443
70	71
75	15
80	15
85	15
90	15

150W T6 - FLOOD UPPER REFLECTOR

LAMP: 150W T6 MH, PHILIPS
LUMEN RATING: 14000 LMS.

CBCP: 14410
Beam Angle: 32
AROMAT 150W ELECTRONIC BALLAST

DATE: MAR 11, 2004
CERTIFIED TEST REPORT NO. 2533FR

COMPUTED BY LSI PROGRAM
TEST-LITE

30° Aiming Angle Horizontal Surface

D	C	FC	L	W
8'	4.6'	146	6.3'	5.3'
10'	5.8'	94	7.9'	6.6'
12'	6.9'	65	9.4'	7.9'
15'	8.7'	42	11.8'	9.9'
20'	11.5'	23	15.7'	13.2'

30° Aiming Angle Vertical Surface

D	C	FC	L	W
3'	5.2'	200	9.1'	3.4'
4'	6.9'	113	12.2'	4.6'
6'	10.4'	50	18.3'	6.9'
8'	13.9'	28	24.4'	9.2'
12'	20.8'	13	36.5'	13.8'

Job Information

Type: