


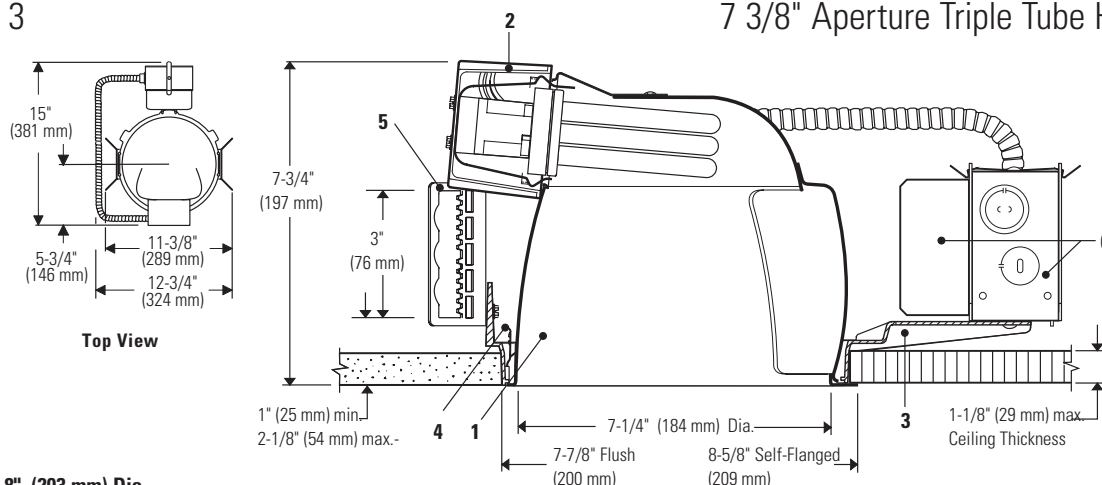

Ceiling Cutout: 8" (203 mm) Dia.

Reflector Trim	Frame-In Kit
8087CLW Clear Iridescence Free, White Flange	S7126BU 7" aperture, 1 lamp 26W Triple Tube CFL (120/277V) 4-Pin (Amalgam)
8087CLP Clear Iridescence Free, Polished Flange	S7132BU 7" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam)
8087CL Clear Iridescence Free, Molded Trim Ring	S7142BU 7" aperture, 1 lamp 26/32/42W Triple Tube CFL (120/277V) 4-Pin (Amalgam)
8087 ☐ Add suffix. See options for other finishes.	Dimming Options:
	S7132B ☐ or S7142B ☐
	CU3 Lightolier PowerSpec 3% Dimming (120/277V) J1LD3 Lutron 3% Dimming (120V)
	J2LD3 Lutron 3% Dimming (277V) JUM7 Mark 7 Dimming (120/277V)
	J1MX Mark 10 Dimming (120V) J2MX Mark 10 Dimming (277V)
	Other dimming product available, please consult factory
Remodeler Frame-In Kits	
7126BURM	7" aperture, 1 lamp 26W Triple Tube CFL (120/277V) 4-Pin (Amalgam)
7132BURM	7" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam)
7142BURM	7" aperture, 1 lamp 26/32/42W Triple Tube CFL (120/277V) 4-Pin (Amalgam)

Features

- Downlight Wall Washer Reflector:** 16 ga. Specular Alzak® aluminum, 55° lamp cutoff to lamp and lamp image. Provides vertical surface wall wash and downlighting. Iridescence Free finish. Self-flanged or flangeless with molded white trim ring (field paintable).
- Socket Cup:** Snaps onto reflector neck to assure consistently correct optical alignment without tools.
- Retaining Springs:** Precision-tooled steel friction springs secure reflector to mounting frame for quick, tool-less installation.
- Mounting Brackets:** 16 ga. steel. Adjust from inside of fixture. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT, or optional mounting bars.
- Ballast/J-Box:** Outboard mounted to reduce heat transfer and maintain lamp efficacy and life. Service from below without tools.

Electrical

Note: For ballast electrical data and latest lamp/ballast compatibility refer to "Ballast" specification sheet for complete electrical data.

UL listed for through branch circuit wiring with max of (8) No. 12 AWG, 90° C supply conductors.

Options and Accessories

Comfort Clear™ Finishes¹

Clear **CCL**
Diffuse **CDD**
Champagne Bronze **CCZ**

Other Finishes

White **WH**

¹Specify desired flange

W White, **P** Polished

Blank - Molded Ring

Options and Accessories (continued)

Emergency Add suffix **EM***

Chicago Plenum Add suffix **LC**

Existing/Thk. Ceiling **FA EC7***

Emergency Ltg. Kit **FA EM3E***

FA EM4E*

Fuse (Slow Blow) Add suffix **F**

*See Spec. Sheets: FAEC, FAEM

Mounting Bars & Accessories; see Specification Sheet MBA.

Sloped Ceiling Adapters; see Specification Sheet SCA

Labels

UL listed for damp locations, I.B.E.W.

Alzak® is a registered trademark of ALCOA.

US Patent Pending.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

www.lightolier.com © 2008 Philips Group • A0608

Lighting Data

Footcandles On Wall: Multiple 32W Units

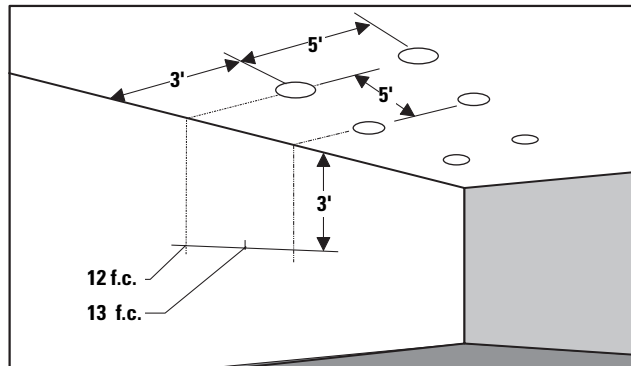

EXAMPLE: With multiple clear reflector units located 3' from wall and spaced 5' on center (matching downlights 5' on center), the illumination on the wall 3' down from ceiling will be 17 f.c. beneath units and 17 f.c. between units.

Footcandle values are averaged and rounded off and are based on a minimum of five units.

Conversion Factor: 26W: (Clear), f.c. x 0.9.

2' from Wall-2' On Center

Distance From Ceiling in Feet	1	37	40	37
2	42	43	42	
3	33	32	33	
4	26	26	26	
5	22	22	22	
6	19	20	19	
7	16	17	16	
8	14	15	14	
9	13	13	13	

2' from Wall-3' On Center

Distance From Ceiling in Feet	1	28	23	28
2	27	30	27	
3	22	22	22	
4	18	17	18	
5	15	15	15	
6	13	13	13	
7	11	11	11	
8	10	10	10	
9	9	9	9	

2' from Wall-4' On Center

Distance From Ceiling in Feet	1	26	11	26
2	23	18	23	
3	15	17	15	
4	13	13	13	
5	11	10	11	
6	9	9	9	
7	8	8	8	
8	7	7	7	
9	6	6	6	

3' from Wall-3' On Center

Distance From Ceiling in Feet	1	16	14	16
2	19	20	19	
3	20	21	20	
4	18	17	18	
5	15	15	15	
6	13	13	13	
7	12	12	12	
8	11	11	11	
9	10	10	10	

3' from Wall-4' On Center

Distance From Ceiling in Feet	1	13	9	13
2	13	14	13	
3	14	16	14	
4	13	12	13	
5	11	10	11	
6	9	9	9	
7	9	9	9	
8	8	8	8	
9	7	7	7	

3' from Wall-5' On Center

Distance From Ceiling in Feet	1	12	6	12
2	12	11	12	
3	12	13	12	
4	10	11	10	
5	9	9	9	
6	8	8	8	
7	7	7	7	
8	7	6	7	
9	6	6	6	

3' from Wall-6' On Center

Distance From Ceiling in Feet	1	11	4	11
2	11	8	11	
3	11	9	11	
4	8	9	8	
5	7	7	7	
6	6	6	6	
7	6	5	6	
8	5	5	5	
9	5	5	5	


Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0608

Lighting Data

Footcandles On Wall: Multiple 42W Units

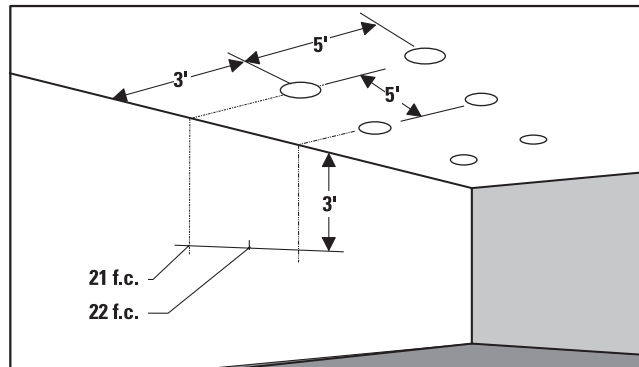

EXAMPLE: With multiple clear reflector units located 3' from wall and spaced 5' on center (matching downlights 5' on center), the illumination on the wall 3' down from ceiling will be 21 f.c. beneath units and 22 f.c. between units.

Footcandle values are averaged and rounded off and are based on a minimum of five units.

2' from Wall-2' On Center

	1	62	67	62
	2	74	68	74
	3	57	55	57
	4	41	41	41
	5	31	32	31
	6	24	25	24
	7	19	19	19
	8	16	16	16
	9	13	13	13

2' from Wall-3' On Center

	1	46	39	46
	2	47	52	47
	3	41	37	41
	4	29	29	29
	5	23	23	23
	6	18	18	18
	7	15	15	15
	8	13	13	13
	9	11	11	11

2' from Wall-4' On Center

	1	42	21	42
	2	41	34	41
	3	28	31	28
	4	23	21	23
	5	17	17	17
	6	14	15	14
	7	12	12	12
	8	10	11	10
	9	9	10	9

3' from Wall-3' On Center

	1	22	23	22
	2	29	32	29
	3	34	31	34
	4	30	28	30
	5	24	24	24
	6	20	20	20
	7	17	17	17
	8	15	15	15
	9	13	13	13

3' from Wall-4' On Center

	1	19	16	19
	2	23	24	23
	3	24	26	24
	4	24	21	24
	5	19	19	19
	6	15	16	15
	7	14	14	14
	8	12	12	12
	9	11	11	11

3' from Wall-5' On Center

	1	17	10	17
	2	20	17	10
	3	21	22	21
	4	18	19	18
	5	16	15	16
	6	13	13	13
	7	11	11	11
	8	10	10	10
	9	9	9	9


3' from Wall-6' On Center

	1	17	7	17
	2	18	12	18
	3	19	16	19
	4	15	17	15
	5	12	13	12
	6	11	10	11
	7	10	9	10
	8	8	8	8
	9	7	8	7

Candlepower Distribution Downlight Spacing Ratio 1.0

Downlight Side

Wall Washer Side

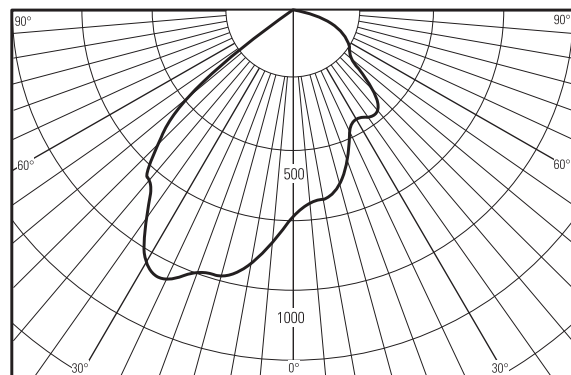

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A0608