

AV93299



Video Converter (RF Modulator)

INSTRUCTION MANUAL




Please read before using this equipment.

NOTE TO CATV SYSTEM INSTALLER:

This reminder is provided to call the CATV system installer's attention to Article 820-40 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

WARNING: To prevent fire or shock hazard, do not expose this product to rain or moisture. This unit for indoor use only

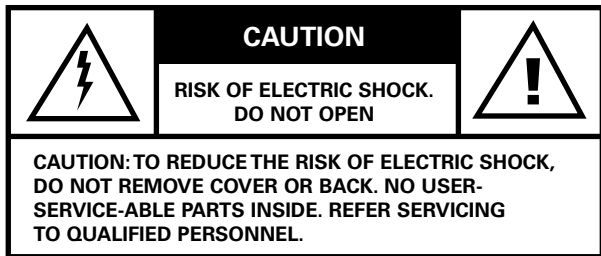

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point with an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Notice : The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

INTRODUCTION

Your Video Converter (RF Modulator) is designed to convert the separate audio and video signals (from a DVD, video camera, or video game, for example) into VHF TV signals that you can view on a TV set equipped with only a 75 Ohm (F-type) input.

The FCC Wants You to Know

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Your modulator might cause TV or radio interference even when is operating properly. To determine whether your modulator is causing the interference, turn it off. If the interference goes away, your modulator is causing it.

Try to eliminate the interference by:

- moving your RF Modulator away from the receiver
- connecting your RF Modulator to an outlet that is on a different electrical circuit from the receiver
- contacting your local store for help

If you cannot eliminate the interference, the FCC requires that you stop using your RF Modulator. Changes or modifications not expressly approved by the party responsible for compliance could void the user's FCC authorization to operate this equipment.

REQUIRED PARTS

The following items (not supplied) are required to connect your RF Modulator to a video input source and your TV.

- one audio/video shielded cable with three phono connectors at each end, if the video source's audio output is stereo; or one audio/video shielded cable with two phono connectors at each end if the video source's audio output is monaural
- two 75-ohm coaxial cables with F-type connectors
- a 75-ohm-to-300-ohm matching transformer, if your TV does not have a VHF 75-ohm F-connector


Note: The audio signal will be modulated to mono, whether the video source is stereo or monaural.

Note to the CATV System Installer: This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.


CONNECTIONS

Follow these steps to connect your RF Modulator.


1. If your video source is stereo, plug the connectors on one end of a stereo A/V cable into the video and audio input jacks on the RF Modulator. Plug the connectors on the cable's other end into to video and audio output jacks on the video source, using the color coding on the connectors as a guide.




If your video source is monaural, plug the connectors on one end of an A/V cable into the video and audio input jacks on the RF Modulator (using the AUDIO L jack). Plug the cable's other ends into the video and audio jacks on the video source. Connect the 75-ohm coaxial cables to the RF Modulator following these guidelines:

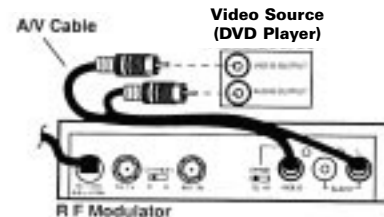


If your TV is already connected to another VHF input source (such as cable, an antenna, or a VCR, for example), disconnect the VHF input source's 75-ohm cable from the TV's 75-ohm VHF/UHF terminal, and reconnect it to the RF Modulator's ANT IN terminal. Then connect a 75-ohm coaxial cable between the TO TV terminal on the RF Modulator and the 75-ohm VHF/UHF terminal on your TV.

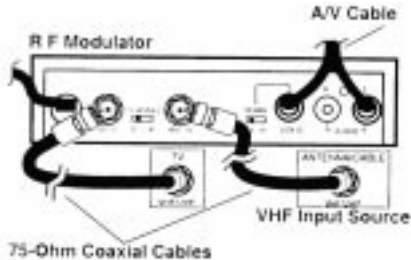

If your TV is not already connected to another VHF source, connect a 75-ohm coaxial cable between the TO TV terminal on the RF modulator and the 75-ohm VHF/UHF terminal on your TV.

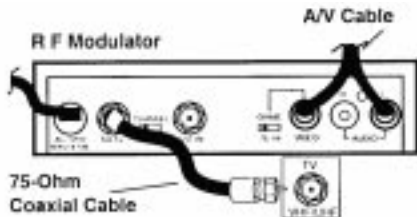


Note: If your TV has only 300-ohm VHF screw terminals, use a 75-ohm-to-300-ohm matching transformer to complete the connection.

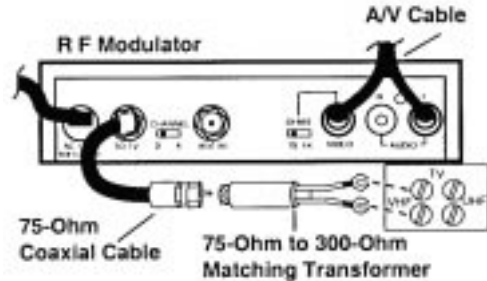

2. Plug the RF Modulator's power cord into a standard AC outlet.

OPERATION

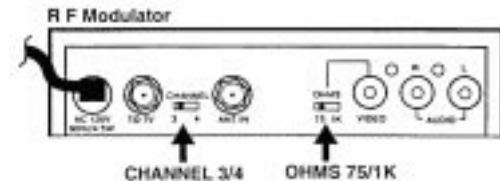

1. Turn on the TV and set it to either Channel 3 or 4, whichever is not used for regular broadcasts in your area.

2. Set the RF Modulator's CHANNEL 3/4 switch to the same channel you set the TV (3 or 4).
3. Turn on the connected video source and set OHMS 75/1K on the RF Modulator to the position that gives the best picture. The video signal indicator on the RF Modulator lights when the modulator is receiving a signal for an A/V source.

CARE

To enjoy your RF Modulator for a long time:

- Keep the modulator dry. If it gets wet, wipe it dry immediately.
- Use and store the modulator only in normal temperature environments.
- Handle the modulator gently and carefully. Don't drop it.
- Keep the modulator away from dust and dirt.
- Wipe the modulator with a damp cloth occasionally to keep it looking new.

Modifying or tampering with the modulator's internal components can cause a malfunction and invalidate its warranty and void your FCC authorization to operate it. If your modulator is not performing as it should, take it to your local store for assistance.

SPECIFICATIONS

Video Carrier Output Level	.69dB_V
RF Output Channels	.3 or 4
RF Output Impedance	.75 Ohms
Video Input Impedance	.75 Ohms/1K Ohms (Switchable)
Audio Input Impedance	.13_3K Ohms
TV to ANT Insertion Loss 50 - 806 MHz	-.2dB
Dimensions	.513/16 x 31/16 x 17/16 inches (148 x 78 x 37 mm)
Weight	.1 lb 2.5 oz .524 kg

Specifications are typical; individual units might vary. Specifications are subject to change and improvement without notice.

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed or used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:



- (1) Reorient or relocate the receiving antenna.
- (2) Increase the separation between the equipment and the receiver.
- (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- (4) Consult the dealer or an experienced radio/TV technician for help.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

90 DAY LIMITED WARRANTY: Jasco Products Co., Inc. warrants this product to be free from manufacturing defects for a period of ninety days from the original date of consumer purchase. This warranty is limited to the repair or replacement of this product only and does not extend to consequential or incidental damage to other products that may be used with this unit. This warranty is in lieu of all other warranties express or implied. Some states do not allow limitations on how long an implied warranty lasts or permit the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific rights, and you may also have other rights which vary from state to state. If unit should prove defective within the warranty period, return prepaid with dated proof of purchase to: **Jasco Products Co., Inc., 311 N.W. 122nd, Oklahoma City, OK. 73114**

GARANTIA LIMITADA DE NOVENTA: Jasco Products., Co. Inc. garantiza este producto por un periodo de noventa días desde la fecha de la compra original, como libre de defectos de fabricación. Esta garantía está limitada a la reparación o reemplazo de este producto y no se extiende a daños consecuentes o incidentales en otros productos que puedan ser usados con esta unidad. Esta garantía es en vez de cualquier otra expresa o implícita. Algunos estados no permite limitaciones al tiempo de limitada o permite el exclusión o limitaciones del daños incidental o consiguiente, así el limitación del arriba no aplicarse. Esta limitada darse justicia, y talvez tiene otro justicias que cambia del estado a estado. Si la unidad resulta defectuosa durante el periodo de garantía, devolverla prepagada a: **Jasco Products Co., Inc., 311 N.W. 122nd. Street, Oklahoma City, OK. 73114**



**Distributed for Thomson Consumer Electronics, Inc.
by Jasco Products, Co., Inc.,
311 N.W. 122nd Street,
Oklahoma City, Oklahoma 73114
www.ge-electronics.com**