

**Ceiling Cutout: 5 1/16" (129 mm) Dia.**

**Ceiling Thickness: 1 1/8" Max**

Trim Kit		Frame-In Kit	Lamp
<b>C4MRP WH</b>	Matte White Trim Plate, White Baffle, Flanged	<b>C420MREU</b> – Electronic 120/277V Non-IC	(1) 20W MR16 CMH GX10 Base
<b>C4MRP BK</b>	Matte White Trim Plate, Black Baffle, Flanged		

### Features

- Baffle:** Die-cast aluminum. 1 ¼" diameter miniature baffle minimizes view into fixtures. Permanently fastened to trim plate.
- Trim Plate:** Die-cast aluminum plate (matte white) overlaps ceiling cut-out for clean look in finishing ceiling.
- Lamp Support:** Die-formed aluminum with knurled surface for easy gripping during relamping. Spring tension clips hold lamp and lens, allow fast snap-in, snap-out relamping. Matte black finish.  
**NOTE:** HID lampholder ship with the frame. Discard the incandescent lampholder that ships standard with the trims.
- Trim Kit Vertical Adjustment Mechanism:** Die-cast aluminum. Built in aperture shield blocks view into fixture. Provides 0°-45° (35° max. with remodel fik) vertical tilt up to 1" thick ceiling, less in thicker ceilings; lockable. Patented EZ-Aim Helical Drive System provides fast and accurate hot aiming with Philips screwdriver. Matte black finish. Lamp shield keeps interior of fixture dark.
- Horizontal Adjustment Mechanism:** Die-form steel ring, matte black finish. Provides 360° horizontal stop, lockable.
- Frame Vertical Adjustment Mechanism:** Accommodates mounting to virtually any ceiling system using pre-installed mounting bars, or ½" EMT tubing (by others). Single locking feature secures all adjustments. Alignment holes and markings allow fixture to be pre-set prior to installation. Final adjustment can be made from below inside fixture. Attaches to steel or wood joists without accessories.
- Mounting Bars:** Galvanized steel, 0.048"; pre-installed telescoping bars extend from 30" long and lock securely into position. Built-in locking tabs provide positive attachment to common T-bars systems. Self-centering feature simplified installation in 24" O.C. grid systems.
- Socket Harness:** Twist and lock base. 5kV (600V) pulse rated PPS, black T240 body socket with nickel-plated contacts. 18 AWG silicone leads with fiberglass outer sleeve

### Options and Accessories

Accepts one accessory

### Labels

U.L (Suitable for Damp Locations)

Teflon® is a registered trademark of E.I. DuPont.


**US Patent No. 5,957,573. Other US and Foreign Patents Pending.**

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2007 Genlyte Group LLC • A1007



## 20W G.E.HID MR16, 12° SPOT, GX10 BASE

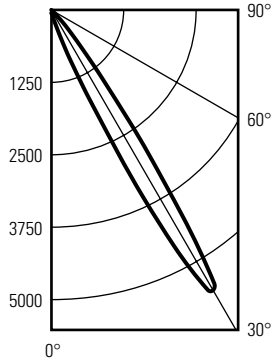

LAMP @ 30 DEGREE VERTICAL TILT  
 LUMEN RATING = 1000 LMS.  
 CBCP = 5585 CD  
 BEAM ANGLE = 12°  
 TEST REPORT NO. 3400FR

### CANDLEPOWER SUMMARY

Angle	CP
0	57
5	59
10	75
15	185
20	733
25	2705
30	5585
35	2363
40	609
45	127
50	37
55	7
60	0
65	0
70	0
75	0
80	0
85	0
90	0


### 30° DEGREE AIMING ANGLE HORIZONTAL SURFACE

D	C	FC	L	W
6'	3.5'	101	1.7'	1.5'
8'	4.6'	57	2.3'	1.9'
10'	5.8'	36	2.8'	2.4'
12'	6.9'	25	3.4'	2.9'
14'	8.1'	19	3.9'	3.4'

### 30° DEGREE AIMING ANGLE VERTICAL SURFACE

D	C	FC	L	W
2'	3.5'	175	1.7'	0.8'
3'	5.2'	78	2.6'	1.3'
4'	6.9'	44	3.5'	1.7'
5'	8.7'	28	4.3'	2.1'
6'	10.4'	19	5.2'	2.5'

## 20W G.E.HID MR16, 25° FLOOD, GX10 BASE

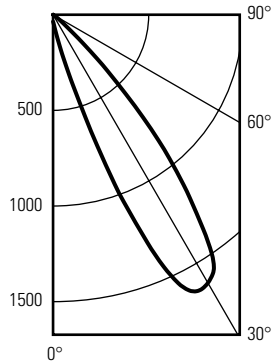

LAMP @ 30 DEGREE VERTICAL TILT  
 LUMEN RATING = 1000 LMS.  
 CBCP = 1619 CD  
 BEAM ANGLE = 20°  
 TEST REPORT NO. 3397FR

### CANDLEPOWER SUMMARY

Angle	CP
0	36
5	53
10	112
15	324
20	945
25	1548
30	1619
35	1369
40	858
45	330
50	67
55	14
60	0
65	0
70	0
75	0
80	0
85	0
90	0


### 30° DEGREE AIMING ANGLE HORIZONTAL SURFACE

D	C	FC	L	W
6'	3.5'	29	2.9'	2.4'
8'	4.6'	16	3.8'	3.3'
10'	5.8'	11	4.8'	4.1'
12'	6.9'	7	5.7'	4.9'
14'	8.1'	5	6.7'	5.7'

### 30° DEGREE AIMING ANGLE VERTICAL SURFACE

D	C	FC	L	W
2'	3.5'	51	3.1'	1.4'
3'	5.2'	22	4.7'	2.1'
4'	6.9'	13	6.2'	2.8'
5'	8.7'	8	7.8'	3.5'
6'	10.4'	6	9.3'	4.2'

## 20W G.E.HID MR16, 40° WIDE FLOOD, GX10 BASE

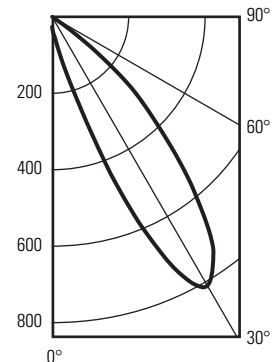

LAMP @ 30 DEGREE VERTICAL TILT  
 LUMEN RATING = 1000 LMS.  
 CBCP = 812 CD  
 BEAM ANGLE = 30°  
 TEST REPORT NO. 3387FR

### CANDLEPOWER SUMMARY

Angle	CP
0	26
5	46
10	78
15	171
20	407
25	691
30	812
35	733
40	557
45	372
50	205
55	34
60	1
65	0
70	0
75	0
80	0
85	0
90	0

### 30° DEGREE AIMING ANGLE HORIZONTAL SURFACE

D	C	FC	L	W
6'	3.5'	15	4.4'	3.7'
8'	4.6'	8	5.9'	5.0'
10'	5.8'	5	7.3'	6.2'
12'	6.9'	4	8.5'	7.4'
14'	8.1'	3	10.2'	8.7'

### 30° DEGREE AIMING ANGLE VERTICAL SURFACE

D	C	FC	L	W
2'	3.5'	25	5.5'	2.1'
3'	5.2'	11	8.2'	3.2'
4'	6.9'	6	10.9'	4.3'
5'	8.7'	4	13.7'	5.4'
6'	10.4'	3	16.4'	6.4'

### Job Information Type:

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2007 Genlyte Group LLC • A1007