
Calculite® ProSpec® Linear Downlight PA2A1175

Page 1 of 2

2 Light AR 111 Series A

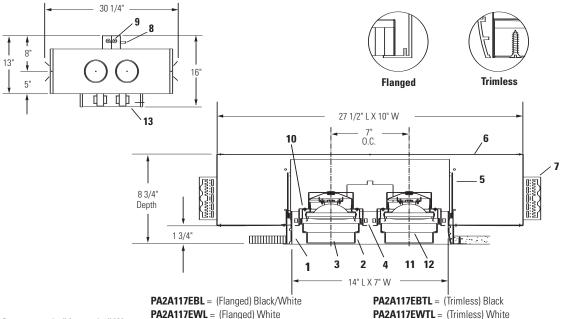

Ceiling Cutout: 15 1/16" L x 8 3/16" W

Add a "1" for 120v or "2" for 277v at the end of the catalog number for voltage

Ordering Information: AR 111 Series A

Cat. No.	Lamp	Ceiling Trim	Aperture Finish				
PA2A117EBL	(2) 75W AR 111	Overlap	Black with White Flange				
PA2A117EWL	(2) 75W AR 111	Overlap	White with White Flange				
PA2A117EBTL	(2) 75W AR 111	Trimless	Black				
PA2A117EWTL	(2) 75W AR 111	Trimless	White				

Features

- 1. Aperture Frame: Provides clean support for lamp holders and overlapping flange or trimless installation. Extruded aluminum. Rigidly welded together on all corners.
- 2. Media Cartridge: Allows convenient loading and removal of up to two accessories (including lamp cover glass; lamp cover glass may be replaced with solid glass accessory). Easily installed and removed for lamping with a simple twisting motion. Constructed of die-cast aluminum.
- 3. Cross Blade Louver: Extruded aluminum. 1" deep, provides additional shielding and can be easily removed.
- Adjustable Ring: Allows 360° horizontal and 30° (on width) and 40° (on length) vertical adjustment.
- 5. Tortiontite Spring: For easy installation of aperture frame.
- 6. Housing: Die-formed 22 ga. steel. Finish: Black.
- 7. Mounting Brackets: Adjustable vertically from outside of housing.
- 8. Thermal Protector: Meets NEC, UL, and CSA requirements.
- 9. Junction Box: 14 ga. steel, 4" x 3 1/2" x 2" box. Allows inspection from below.
- 10. Lamp and Accessory Support: .032" steel, flared for easy entry of Media
- 11. Lens Retaining Ring: .093" spring steel rod. Holds accessories in place.
- 12. Lamp Guard: Heat-resistant clear glass. Lamp manufacturers requirement.
- 13. Transformer Housing: Die-formed 18 ga. steel.

Electronic Transformers: Offer reliable operation and are accessible from below for servicing. 12V Secondary.

Dimming Controls: Use only dimmers specifically designed for use with electronic transformers. Low Voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Finish

All painted finishes are powder coated baked enamel

Options & Accessories

Accessories: 4 3/4" dia. series, filters, lenses, screens and louvers. (2) accessories maximum, including lamp cover glass. Lamp guard glass may be replaced with solid glass accessory.

UL/cUL (Suitable for Damp Location), I.B.E.W..

US Patent Pending.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2005 Genlyte Group LLC • B1105



Calculite® ProSpec® Linear Downlight PA2A1175

2 Light AR 111 Series A


Page 2 of 2


(FC) is initial footcandles at center of beam. Beam length (L) and beam width (W) are to where the candlepower is reduced to 50% of the center beam candlepower.


CBCP is center beam candlepower.

(C) is distance to the center of the beam.

Lamp data shown is typical, and is based on bare lamp photometrics. Contact lamp manufacturers for availability and performance.







			Rated Life (Hrs.)	0° Aiming Angle			30° Aiming Angle				30° Aiming Angle						
Lamps	Beam Spread (To 50% CBCP)			D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
MR16 Low Voltage Halogen Bi-Pin Lamps																	
75W AR111 SP	10°	25000	2000	10' 15' 20' 25'	250 111 63 40	1.7' 2.6' 3.5' 4.4'	1.7' 2.6' 3.5' 4.4'	8' 12' 16' 20'	4.6' 6.9' 9.2' 11.5'	254 113 63 41	1.9' 2.8' 3.7' 4.7'	1.6' 2.4' 3.2' 4.0'	4′ 6′ 8′ 10′	6.9' 10.4' 13.9' 17.3'	195 87 49 31	2.9' 4.3' 5.7' 7.2'	1.4' 2.1' 2.8' 3.5'
75W AR111 FL	30°	4500	2000	6′ 8′ 10′ 12′	125 70 45 31	3.2' 4.3' 5.4' 6.4'	3.2' 4.3' 5.4' 6.4'	5′ 7′ 9′ 11′	2.9' 4.0' 5.2' 6.4'	117 60 36 24	3.7' 5.1' 6.6' 8.1'	3.1' 4.3' 5.6' 6.8'	2' 3' 4' 5'	3.5' 5.2' 6.9' 8.7'	141 63 35 23	5.5′ 8.2′ 10.9′ 13.7′	2.1' 3.2' 4.3' 5.4'
75W AR111 WFL	60°	1300	2000	3' 5' 7' 9'	144 52 27 16	3.5′ 5.8′ 8.1′ 10.4′	3.5′ 5.8′ 8.1′ 10.4′	3' 5' 7' 9'	1.7' 2.9' 4.0' 5.2'	94 34 17 10	5.2' 8.7' 12.1' 15.6'	4.0' 6.7' 9.3' 12.0'	1' 2' 3' 4'	1.7' 3.5' 5.2' 6.9'	163 41 18 10	* * *	2.3' 4.6' 6.9' 9.2'

LIGHTOLIER

Job Information

Type: