


Calculite® ProSpec® Linear Downlight PA4A7050

Page 1 of 2

4 Light AR 70 Series A

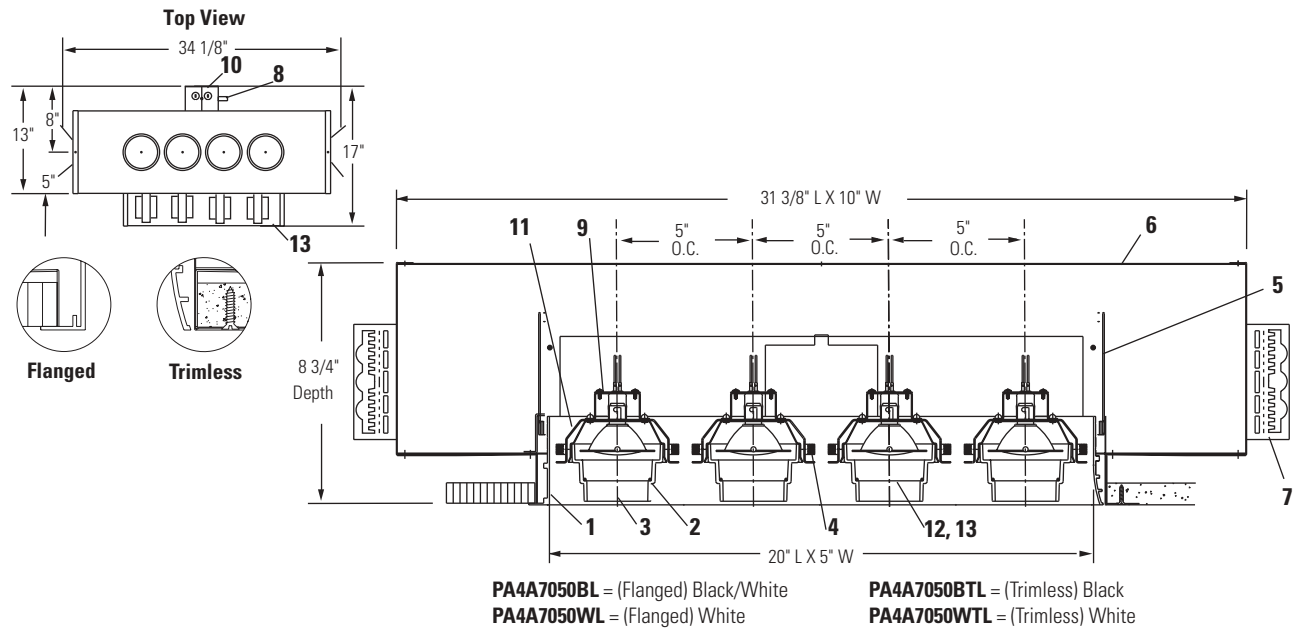

Ceiling Cutout: 21 1/16" L x 6 3/16" W

Ordering Information: AR 70 Series A

Cat. No.	Lamp	Ceiling Trim	Aperture Finish
PA4A7050BL	(4) 50W AR 70	Overlap	Black with White Flange
PA4A7050WL	(4) 50W AR 70	Overlap	White with White Flange
PA4A7050BTL	(4) 50W AR 70	Trimless	Black
PA4A7050WTL	(4) 50W AR 70	Trimless	White

Features

- Aperture Frame:** Provides clean support for lamp holders and overlapping flange or trimless installation. Extruded aluminum. Rigidly welded together on all corners.
- Media Cartridge:** Allows convenient loading and removal of up to two accessories (including lamp cover glass; lamp cover glass may be replaced with solid glass accessory). Easily installed and removed for lamping with a simple twisting motion. Constructed of die-cast aluminum.
- Cross Blade Louver:** Extruded aluminum. 1" deep, provides additional shielding and can be easily removed.
- Adjustable Ring:** Allows 360° horizontal and 35° (on width) and 45° (on length) vertical adjustment.
- Tortionite Spring:** For easy installation of aperture frame.
- Housing:** Die-formed 22 ga. steel. Finish: Black.
- Mounting Brackets:** Adjustable vertically from outside of housing.
- Thermal Protector:** Meets NEC, UL, and CSA requirements.
- Lampholder:** double contact bayonet base with 250°C #18 gauge Teflon® leads.
- Junction Box:** 14 ga. steel, 4" x 3 1/2" x 2" box. Allows inspection from below.
- Lamp and Accessory Support:** .032" steel, flared for easy entry of Media Cartridge.
- Lens Retaining Ring:** .093" spring steel rod. Holds accessories in place.
- Lamp Guard:** Heat-resistant clear glass. Lamp manufacturers requirement.
- Transformer Housing:** Die-formed 18 ga. steel.

Electrical

Magnetic Transformer: Individual for each lamp. Offers reliable operation and is accessible from below for servicing. 120V Primary; 11.5V Secondary.

Dimming Controls: Use only dimmers specifically designed for use with magnetic transformers, like Lightolier Onset series LV or VA dimmers, or any Lightolier Control dimming system. Low Voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Electrical (continued)

UL/cUL listed for through branch circuit wiring with maximum of (8) no. 12 AWG, 90°C.

Finish

All painted finishes are powder coated baked enamel.

Options & Accessories

Accessories: 2 1/2" dia. series, filters, lenses, screens and louvers. (2) accessories maximum, including lamp cover glass. Lamp guard glass may be replaced with solid glass accessory.

Labels

UL/cUL (Suitable for Damp Location), I.B.E.W.


Teflon® is a registered trademark of E.I. DuPont.

US Patent Pending.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®




Lighting Performance Data

Aiming Angle:

- L** Beam length
- B** Beam width
- C** Distance to center of beam
- D** Distance
- A** Aiming angle
- FC** Foot candles

Lamp data shown is typical, and is based on bare lamp photometrics. Contact lamp manufacturers for availability and performance.

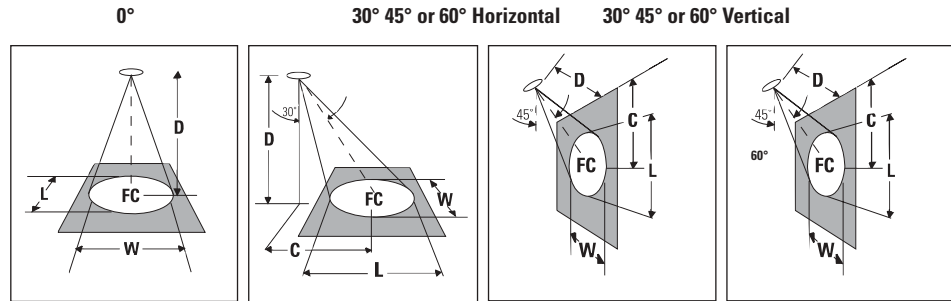

Lamp	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° Aiming Angle				30° Aiming Angle					45° Aiming Angle					60° Aiming Angle				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
50W AR70 SP (T-H)	10°	15000	2000	8'	234	1.4'	1.4'	7'	4.0'	199	1.6'	1.4'	5'	5.0'	212	1.8'	1.2'	3'	5.2'	208	2.1'	1.0'
				12'	104	2.1'	2.1'	10'	5.8'	97	2.3'	2.0'	7'	7.0'	108	2.5'	1.7'	4'	6.9'	117	2.9'	1.4'
				16'	59	2.8'	2.8'	13'	7.5'	58	3.0'	2.6'	9'	9.0'	65	3.2'	2.2'	5'	8.7'	75	3.6'	1.7'
				20'	38	3.5'	3.5'	16'	9.2'	38	3.7'	3.2'	11'	11.0'	44	3.9'	2.7'	6'	10.4'	52	4.3'	2.1'
50W AR70 FL (T-H)	30°	2000	2000	4'	125	2.1'	2.1"	3'	1.7'	144	2.2'	1.9'	3'	3.0'	79	3.5'	2.3'	1'	1.7'	250	2.7'	1.1'
				6'	56	3.2'	3.2'	5'	2.9'	52	3.7'	3.1'	4'	4.0'	44	4.6'	3.0'	2'	3.5'	63	5.5'	2.1'
				8'	31	4.3'	4.3'	7'	4.0'	27	5.1'	4.3'	5'	5.0'	28	5.8'	3.8'	3'	5.2'	28	8.2'	3.2'
				10'	20	5.4'	5.4'	9'	5.2'	16	6.6'	5.6'	6'	6.0'	20	6.9'	4.5'	4'	6.9'	16	10.9'	4.3'
50W AR70 SP GOLD (T-H)	10°	13500	2000	8'	211	1.4'	1.4'	7'	4.0'	199	1.6'	1.4'	5'	5.0'	191	1.8'	1.2'	3'	5.2'	188	2.1'	1.0'
				12'	94	2.1'	2.1'	10'	5.8'	97	2.3'	2.0'	7'	7.0'	97	2.5'	1.7'	4'	6.9'	105	2.9'	1.4'
				16'	53	2.8'	2.8'	13'	7.5'	58	3.0'	2.6'	9'	9.0'	59	3.2'	2.2'	5'	8.7'	68	3.6'	1.7'
				20'	34	3.5'	3.5'	16'	9.2'	38	3.7'	3.2'	11'	11.0'	39	3.9'	2.7'	6'	10.4'	47	4.3'	2.1'
50W AR70 FL GOLD (T-H)	30°	1800	2000	4'	125	2.1'	2.1"	3'	1.7'	144	2.2'	1.9'	3'	3.0'	71	3.5'	2.3'	1'	1.7'	225	2.7'	1.1'
				6'	56	3.2'	3.2'	5'	2.9'	52	3.7'	3.1'	4'	4.0'	40	4.6'	3.0'	2'	3.5'	56	5.5'	2.1'
				8'	31	4.3'	4.3'	7'	4.0'	27	5.1'	4.3'	5'	5.0'	25	5.8'	3.8'	3'	5.2'	25	8.2'	3.2'
				10'	20	5.4'	5.4'	9'	5.2'	16	6.6'	5.6'	6'	6.0'	18	6.9'	4.5'	4'	6.9'	14	10.9'	4.3'
50W AR111 NSP (T-H)	5°	50000	2000	15'	222	1.3'	1.3'	10'	5.8'	325	1.2'	1.0'	8'	8.0'	276	1.4'	1.0'	5'	8.7'	250	1.8'	0.9'
				20'	125	1.7'	1.7'	15'	8.7'	144	1.7'	1.5'	12'	12.0'	123	2.1'	1.5'	8'	13.9'	98	2.6'	1.4'
				25'	80	2.2'	2.2'	20'	11.5'	81	2.3'	2.0'	16'	16.0'	69	2.8'	2.0'	11'	19.1'	52	3.9'	1.9'
				30'	56	2.6'	2.6'	25'	14.4'	52	2.9'	2.5'	20'	20.0'	44	3.5'	2.5'	14'	24.2'	32	4.9'	2.4'
50W AR111 FL (T-H)	30°	3000	2000	6'	83	3.2'	3.2'	5'	2.9'	78	3.7'	3.1'	3'	3.0'	118	3.5'	2.3'	2'	3.5'	94	5.5'	2.1'
				8'	47	4.3'	4.3'	7'	4.0'	40	5.1'	4.3'	5'	5.0'	42	5.8'	3.6'	3'	5.2'	42	8.2'	3.2'
				10'	30	5.4'	5.4'	9'	5.2'	24	6.6'	5.6'	7'	7.0'	22	8.1'	5.3'	4'	6.9'	23	10.9'	4.3'
				12'	21	6.4'	6.4'	11'	6.4'	16	8.1'	6.6'	9'	9.0'	13	10.4'	6.8'	5'	8.7'	15	13.7'	5.4'

Data are based on bare lamp photometrics.
Dashed lines in beam spreads indicate narrow axes of oval shaped beams.
FC is initial footcandles at center of beam.
L and **W** are to the point that the candlepower drops 50% of maximum.

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®