




# Calculite® ProSpec® Linear Downlight **PB4M1675**

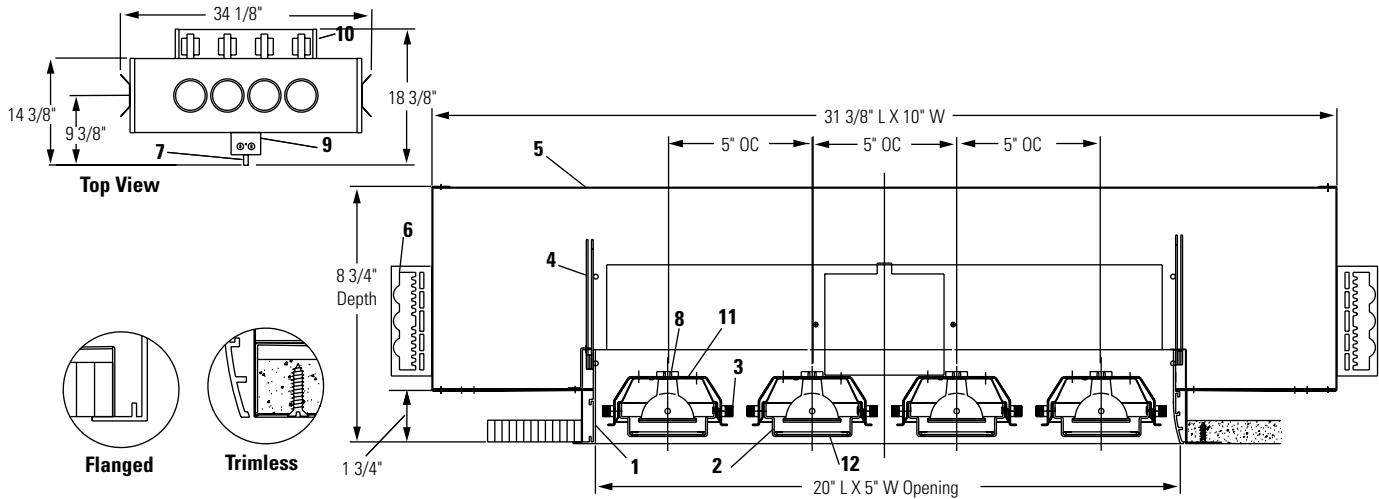

**PB4M167EBL** = (Flanged) Black/White

**PB4M167EWL** = (Flanged) White

**PB4M167EBTL** = (Trimless) Black

**PB4M167EWTL** = (Trimless) White

Add a "1" for 120v or "2" for 277v at the end of the catalog number for voltage

**Ceiling Cutout: 21 1/16" L x 6 3/16" W**

**Ordering Information: MR 16 Series B**

Cat. No.	Lamp	Ceiling Trim	Aperture Finish
<b>PB4M167EBL</b>	(4) 75W MR 16*	Overlap	Black with White Flange
<b>PB4M167EWL</b>	(4) 75W MR 16*	Overlap	White with White Flange
<b>PB4M167EBTL</b>	(4) 75W MR 16*	Trimless	Black
<b>PB4M167EWTL</b>	(4) 75W MR 16*	Trimless	White

Add a "1" for 120v or "2" for 277v at the end of the catalog number for voltage

\*50W max.lamping when using accessories

**Features**

- Aperture Frame:** Provides clean support for lamp holders and overlapping flange or trimless installation. Extruded aluminum. Rigidly welded together on all corners.
- Media Cartridge:** Allows convenient loading and removal of one accessory. Easily installed and removed for lamping with a simple twisting motion. Constructed of die formed aluminum.
- Adjustable Ring:** Allows 360° horizontal and 45° (on width) and 45° (on length) vertical adjustment.
- Tortiontite Spring:** For easy installation of aperture frame.
- Housing:** Die-formed 22 ga. steel. Finish: Black
- Mounting Brackets:** Adjustable vertically from outside of housing.
- Thermal Protector:** Meets NEC, UL, and CSA requirements.
- Lampholder:** Steatite for GX/GY 5.3 Bi-Pin lamps. 250°C Teflon® leads.
- Junction Box:** 14 ga. steel, 4" x 3 1/2" x 2" box. Allows inspection from below.
- Transformer Housing:** Die-formed 18 ga. steel.
- Lamp and Accessory Support:** .032" steel, flared for easy entry of Media Cartridge.
- Lamp Guard:** Heat-resistant clear glass. Lamp manufacturers' requirement.

**Electrical**

**Electronic Transformer:** Individual for each lamp. Offers reliable operation and is accessible from below for servicing. 12V Secondary 75VA ea. lamps.

**Dimming Controls:** Use only dimmers specifically designed for use with electronic transformers. Low Voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

**Electrical (continued)**

UL /cUL listed for through branch circuit wiring with maximum of (8) no. 12 AWG, 90°C.

**Finish**

All painted finishes are powder coated, baked enamel.

**Options & Accessories**

**Accessories:** 2 1/2" dia. series, filters, lenses, screens, and louver (1) accessories maximum, including lamp cover glass. Lamp cover glass may be replaced with solid glass accessory.

**Labels**

UL/cUL (Suitable for Damp Location), I.B.E.W.

Teflon® is a registered trademark of E.I. DuPont.

**US Patent Pending.**

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

**Lightolier** a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2006 Genlyte Group LLC • C0306

**LIGHTOLIER®**



## Lighting Performance Data

Narrow																				
	42W MR16 VNSP (EYZ)			42W MR16 NSP (EYR)			42W MR16 SP (EYS)			50W MR16 NSP (EXT)			75W MR16 NSP (EYF)							
FOOTCANDLES (On Beam Center At 6')	333			197			78			254			319							
BEAM SPREAD (To 50% Max. CP)	7° x 3°			11.5°			20°			11° x 13°			14° x 15°							
MAX. CANDLEPOWER (Candelas)	12,000			7,075			2,800			9,150			11,500							
RATED LIFE (Hours)	3,000			3,000			3,000			3,000			3,500							
COLOR TEMPERATURE	3,000°K			3,300°K			3,000°K			3,025°K			3,025°K							
<b>0° AIMING ANGLE</b> Illumination on Horizontal Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	8'	188	1.0'	1.3'	7'	144	1.4'	1.4'	4'	175	1.4'	1.4'	7'	187	1.3'	1.6'	8'	180	2.0'	2.1'
	12'	83	1.5'	1.9'	10'	71	2.0'	2.3'	6'	78	2.1'	2.1'	10'	92	1.9'	2.3'	12'	80	2.9'	3.2'
	16'	47	2.0'	2.5'	13'	42	2.6'	2.6'	8'	44	2.8'	2.8'	13'	54	2.5'	3.0'	16'	45	3.9'	4.2'
	20'	30	2.5'	3.1'	16'	38	3.2'	3.2'	10'	28	3.5'	3.5'	16'	35	3.1'	3.6'	20'	25	4.9'	5.3'
<b>30° AIMING ANGLE</b> Illumination on Horizontal Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	7'	159	1.1'	1.3'	6'	128	1.6'	1.4'	3'	202	1.4'	1.2'	6'	165	1.5'	1.6'	7'	152	2.3'	2.1'
	10'	77	1.6'	1.8'	9'	57	2.4'	2.1'	5'	73	2.4'	2.0'	9'	73	2.3'	2.4'	10'	75	3.3'	3.0'
	13'	46	2.1'	2.4'	12'	32	3.2'	2.8'	7'	37	3.3'	2.9'	12'	41	3.1'	3.2'	13'	44	4.3'	4.0'
	16'	30	2.6'	2.9'	15'	20	4.0'	3.5'	9'	22	4.3'	3.7'	15'	26	3.9'	3.9'	16'	29	5.3'	4.9'
<b>30° AIMING ANGLE</b> Illumination on Vertical Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	3'	167	1.5'	0.9'	2'	221	1.7'	0.8'	1'	350	1.6'	0.7'	2'	286	1.6'	0.9'	3'	160	3.1'	1.6'
	4'	94	2.0'	1.3'	3'	98	2.5'	1.2'	2'	88	3.1'	1.4'	3'	127	2.4'	1.4'	4'	90	4.1'	2.0'
	5'	60	2.5'	1.6'	4'	55	3.3'	1.6'	3'	39	4.7'	2.1'	4'	71	3.2'	1.8'	5'	58	5.1'	2.6'
	6'	41	3.0'	1.9'	5'	35	4.2'	2.0'	4'	22	6.2'	2.8'	5'	46	4.0'	2.3'	6'	40	6.2'	3.2'
<b>45° AIMING ANGLE</b> Illumination on Vertical or (Horizontal) Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	5'	170	1.2'	1.1'	4'	156	1.6'	1.1'	3'	110	2.2'	1.5'	4'	202	1.6'	1.3'	5'	163	2.5'	1.9'
	7'	87	1.7'	1.6'	6'	69	2.4'	1.7'	4'	62	2.9'	2.0'	6'	90	3.2'	1.9'	7'	83	3.5'	2.6'
	9'	52	2.2'	2.0'	8'	39	3.3'	2.3'	5'	40	3.6'	2.5'	8'	51	3.1'	2.6'	9'	50	4.5'	3.4'
	11'	35	2.7'	2.4'	10'	25	4.1'	2.8'	6'	27	4.4'	3.0'	10'	32	3.9'	3.2'	11'	34	5.5'	4.1'

Medium					Wide															
	50W MR16 NFL (EXZ)		75W MR16 NFL (EYJ)		42W MR16 FL (EYP)		50W MR16 FL (EXN)		75W MR16 FL (EYC)											
FOOTCANDLES (On Beam Center At 6')	83		128		28		42		56											
BEAM SPREAD (To 50% Max. CP)	22° x 27°		25°		36°		37° x 39°		38° x 40°											
MAX. CANDLEPOWER (Candelas)	3,000		4,600		991		1,500		2,000											
RATED LIFE (Hours)	3,000		3,500		3,000		3,000		3,500											
COLOR TEMPERATURE	3,025°K		3,050°K		3,050°K		3,050°K		3,500°K											
<b>0° AIMING ANGLE</b> Illumination on Horizontal Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	6'	83	2.3'	2.9'	6'	128	2.7'	2.7'	3'	110	1.9'	1.9'	4'	94	2.7'	2.8'	4'	125	2.8'	2.9'
	8'	47	3.1'	3.8'	8'	72	3.5'	3.5'	5'	40	3.2'	3.2'	6'	42	4.0'	4.2'	6'	56	4.1'	4.4'
	10'	30	3.9'	4.8'	10'	46	4.4'	4.4'	7'	20	4.5'	4.5'	8'	23	5.4'	5.7'	8'	31	5.5'	5.8'
	12'	21	4.7'	5.8'	12'	32	5.3'	5.3'	9'	12	5.8'	5.8'	10'	15	6.7'	7.1'	10'	20	6.9'	7.3'
<b>30° AIMING ANGLE</b> Illumination on Horizontal Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	4'	122	2.1'	2.2'	5'	120	3.0'	2.6'	3'	72	2.7'	2.3'	3'	108	2.8'	2.5'	3'	144	2.9'	2.5'
	6'	54	3.1'	3.3'	7'	61	4.2'	3.6'	5'	26	4.5'	3.8'	5'	39	4.6'	4.1'	5'	52	4.8'	4.2'
	8'	30	4.2'	4.4'	9'	37	5.4'	4.6'	7'	13	6.3'	5.3'	7'	20	6.5'	5.7'	7'	27	6.7'	5.9'
	10'	19	5.2'	5.5'	11'	25	6.6'	5.6'	9'	8	8.1'	6.8'	9'	12	8.3'	7.4'	9'	16	8.6'	7.6'
<b>30° AIMING ANGLE</b> Illumination on Vertical Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	2'	94	3.5'	1.9'	2'	144	4.2'	1.8'	1'	124	3.8'	1.3'	1'	188	4.0'	1.4'	1'	250	4.3'	1.5'
	3'	42	5.3'	2.9'	3'	64	6.2'	2.7'	2'	31	7.6'	2.6'	2'	47	8.1'	2.8'	2'	63	8.6'	2.9'
	4'	23	7.0'	3.8'	4'	36	8.3'	3.5'	3'	14	11.4'	3.9'	3'	21	12.1'	4.2'	3'	28	12.8'	4.4'
	5'	15	8.8'	4.8'	5'	23	10.4'	4.4'	4'	8	15.2'	5.2'	4'	12	16.1'	5.7'	4'	16	17.1'	5.8'
<b>45° AIMING ANGLE</b> Illumination on Vertical or (Horizontal) Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
	3'	118	2.4'	2.0'	3'	181	2.1'	1.9'	2'	88	2.9'	1.8'	2'	133	3.0'	2.0'	2'	79	4.7'	3.1'
	5'	42	4.0'	3.4'	5'	65	4.7'	2.1'	3'	39	4.4'	2.8'	3'	59	4.5'	3.0'	3'	44	6.3'	4.1'
	7'	22	5.7'	4.8'	7'	33	6.5'	4.4'	4'	22	5.8'	3.7'	4'	33	6.0'	4.0'	4'	28	7.8'	5.1'
	9'	13	7.3'	6.1'	9'	20	8.4'	5.6'	5'	14	7.3'	4.6'	5'	21	7.5'	5.0'	5'	20	9.4'	6.2'

Beam Center Location										
Distance D (ft.)	1	2	3	4	5	6	7	8	9	10
Distance C (ft.)	1.7	3.5	5.2	6.9	8.7	10.4	12.1	13.8	15.6	17.3

This chart locates the distance (C) to the center of the light beam for various distances (D) when the lamp is aimed 30° from vertical, the preferred aiming angle for lighting pictures on a wall.

Data are based on bare lamp photometrics. Dashed lines in beam spreads indicate narrow axes of oval shaped beams.

**FC** is initial footcandles at center of beam. **L** and **W** are to the point that the candlepower drops to 50% of maximum.

### Job Information Type:

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2006 Genlyte Group LLC • C0306

