

Page 1 of 2

Wall Mounted Incandescent ADA Compliant

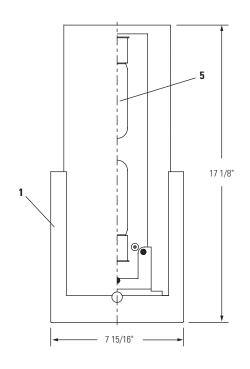

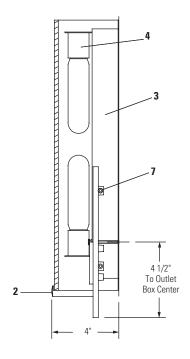

Complete Fixture consists of Lightshield and Backplate Assembly. Order each separately.

Lightshield Ordering Information

Pattern/Description/Color

INO.	
40872	Rolled "Rain" pattern texture, Silk-screened White/Clear fused in place.
40866	Three Dimensional "Squares" White/Clear Silk-screened Pattern
40863	"Ceramic White" Silk-screened and Sandblasted

Backplate Assembly Ordering Information

Cat. No.	Lamps	Finish
40831	2x60W T-10 Incandescent	Satin Brass
40832	2x60W T-10 Incandescent	Satin Nickel

Features

- Diffuser Holder: Die-cast zinc alloy. Satin brass or satin nickel finish with clear lacquer.
- 2. Diffuser Support Peg: Turned brass. Satin brass or satin nickel finish with
- 3. Backplate: 20 ga. (.036") Die-formed steel, gloss white finish.
- 4. Socket: Medium Base, Porcelain, Nickel Plate Screw Shell.
- 5. Lamps: T-10, Medium Base, by others.
- 6. Diffuser: 6mm thick (Max.) Glass. See chart above for option.
- 7. Screw: Nylon. 8-32. To secure Diffuser.

Labels

cULus listed suitable for damp locations.

Job Information	Type:
Job Name: Cat. No.:	
Lamp(s): Notes:	


Lightolier a Genlyte company www.lightolier.com 631 Airport Road, Fall River, MA 02720 ◆ (508) 679-8131 ◆ Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2005 Genlyte Group LLC ◆ C0905

Specification Decorative BowShield™ 40831


Page 2 of 2


Wall Mounted Incandescent ADA Compliant

Hallway / Footcandles

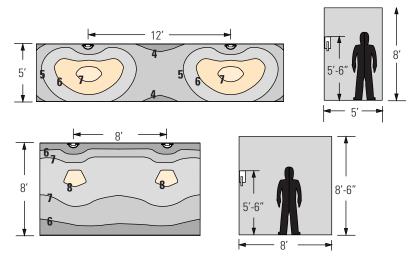

Vestibule / Conference Room / Footcandles





Reflectances

80% ceiling / 50% wall / 20% floor Footcandles are on floor.

Multiplier Factors

Data shown is based on an "All White" lightshield. For colors use 0.8 multiplier

Job Information

Type: