





Complete Fixture consists of Lightshield and Backplate Assembly. Order each separately.

Lightshield		Backplate			
Catalog No.	Description	Lamp	Catalog No.	Ballast	Volts
408875	Pick-Up Sticks 	1 X 60W, A-19 Incandescent	40885	Not Applicable	120V
408877	Grid 	2 X 13W Quad Tube CFL (4-Pin)	40885U	Universal Electronic	120/277V
408879	Wood 	2 X 13W Quad Tube CFL (2-Pin)	40885H1	Magnetic HPF	120V
4088710	Parchment 	2 X 13W Quad Tube CFL (2-Pin)	40885H2	Magnetic HPF	277V

Features

- Lightshield:** Organic composite consisting of fibers, papers or veneers laminated between sheets of light-stable polymer. Washable, virtually tear-proof and puncture-resistant.
- Lightshield Frame:** Welded drawn steel wire, 1/8" dia. Nickel powder-coat finish.
- Backplate:** Die-formed 20 ga. steel. Baked white enamel finish.
- Mounting:** Directly to 4" octagonal Outlet Box
- Lamps:** Incandescent or Compact Fluorescent, by others.

Lamping

Incandescent: 60W A-19, medium base

Compact Fluorescent: 13W Quad Tube

	General Electric	Osram/Sylvania	Philips
4-Pin	F13DBX/* /4P	CF13DD/E	PL-C13W/* /A/4P
2-Pin	F13DBX23T4/*	CF13DD	PL-C13W/* /USA

* Manufacturers' color temperature designation.

Electrical

Lampholders:

Incandescent: Medium base, porcelain, nickel-plate screw shell

Compact fluorescent: 4-pin, G24q-1 base, 2-pin, GX23-2 base

Ballasts:	Electronic Dimmable 120V	Electronic 120/277V	Magnetic 120V 277V	
	Total Input Watts	24	29	31
Max. Line Current (Amps)	0.20	0.24/0.11	.27	.10
Power Factor	.98	.98	High	
Ballast Factor	1.00	1.00	.95	.85
THD	<10%	<10%	N/A	N/A
Min. Starting Temps.	50°F	0°F	32°F	32°F

Labels

UL listed suitable for damp locations.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	



Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2005 Genlyte Group LLC • B0805

LIGHTOLIER®




Application Data/Footcandles

Hallway

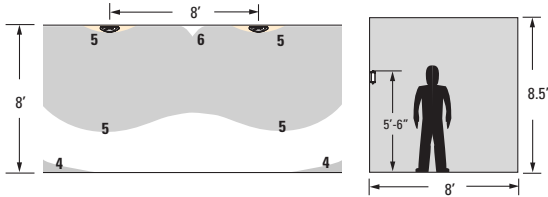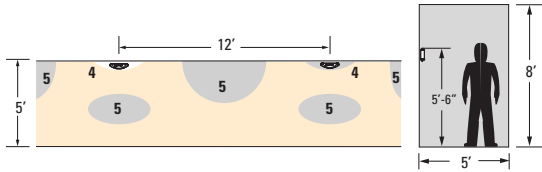

Vestibule / Cocktail Lounge

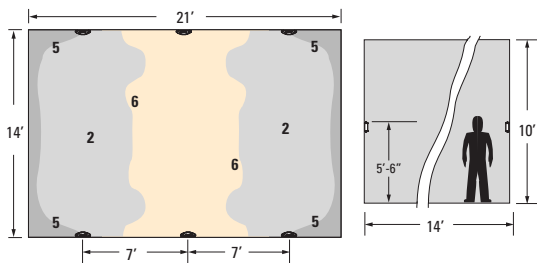

Reflectances

80% ceiling / 50% wall / 20% floor
Footcandles are on floor.

Multiplier Factors

Data shown is based on "Grid" Lightshield #408867 with 2 x 13W Quad lamps.

	CFL	Incandescent
Pick-Up Sticks	0.60	0.30
Parchment	0.45	0.25
Wood	0.45	0.25

Job Information Type:

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2005 Genlyte Group LLC • B0805

LIGHTOLIER®