


# Specification Decorative Pendalyte™ 40734XU3DK

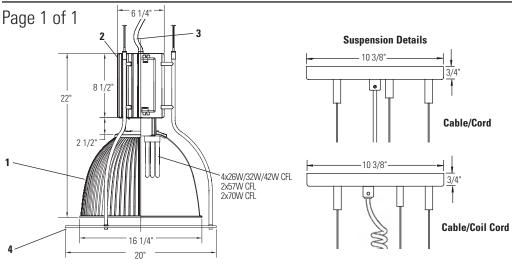

#### Complete fixture consists of Reflector, Power Head, Deco Kit, Deco Disk and Suspension. Select each separately.

Reflector/Refractor	Power Head: Dark Grey Finish							
Cat. Number	Cat. No.	Lamp	Watts	Volts	Options			
40431 Semi Specular	40734X	CFL Triple Tube	4X26/32/42	120/277	U3, U3E3, U2MX1, U2MX2, U4MX1, U4MX2			
Anodized Reflector	4073257	CFL Triple Tube	2x57	120/277	U, UE3, MX1, MX2			
40432 Acrylic Refractor	4073270	CFL Triple Tube	2x70	120/277	U, UE3, MX1, MX2			

# 16" Multi-Lamp Pendant

U, U3	=Standard Ballast			
UE3, U3E3	= Standard Ballast (347V)			
U2MX1	= Mark X Dimming 26W, 120V*			
U2MX2	= Mark X Dimming 26W, 277V*			
U4MX1	= Mark X Dimming 32/42W, 120V*			
U4MX2	= Mark X Dimming 32/42W, 277V*			
MX1	= Mark X Dimming 57 or 70W, 120V*			
MX2	= Mark X Dimming 57 or 70W, 120V*			
* 2-Wire, Neutral Connection required at Dimming Control				

### Deco Kits\*

2000 11									
Cat. No.	Description	Optional Extension Kits			Reflector/Refractor Options				
416DK	Grey Deco Cable Assembly	Cat. No.	Color	Description	Cat. No.	Description	Use With		
* Deco Kit inc	cludes Arms & Suspension Systems (120")	404EXT300*	Grey	25' Ext. Cable/Cord Kit	431G	Industrex Glass Lens	40431		
Deco Disks		404EXTB*	Black	25' Ext.Cable/Cord Kit	432A	Flat Acrylic Lens	40432		
Cat. No.	Description	*Use with Standa	rd Deco Sus	pension Kits	432G	Industrex Glass Lens	40432		
416DG	Glass Deco Disk	_							

#### **Features**

416DA

416PM

- 1. Refractor/Reflector: Injection molded acryic, UV stablized or 16 gauge anodized aluminum, iridescent free.
- 2. Power Head Housing: Two-piece extruded aluminum. Removable door allows for ease of installation and servicing. Dark Gray textured powder coat finish.
- 3. Suspension:

Cable/Cord: 1/16" Stainless Steel/SJT 18-3, Grey. Cable/Coiled Cord: 1/16" Stainless Steel/SJT 18-3, Grey.

Acrylic Deco Disk

Perforated Metal Deco Disk

- 4. Aperture Disk: Glass, Acrylic or Perforated Metal. See specification sheet 416DK for more details on Deco elements.
- 5. Adjustment: (3) fittings on cable allows for height and leveling adjustment after installation.
- 6. Support Arms: (3) 3/8" dia. steel tubing, brushed and clear laquered

## Lamping (by others)

**Compact Fluorescent**:

General Electric	Osram/Sylvainia	Philips			
(4) 26W Triple Tube 4	-Pin (Amalgam) Compa	nct Fluorescent Lamp			
F26TBX/*/A/4P	CF26DT/E/IN/*	PL-T26W/*/4P			
(4) 32W Triple Tube 4	-Pin (Amalgam) Compa	nct Fluorescent Lamp			
F32TBX/*/A/4P	CF32DT/E/IN/*	PL-T32W/*/4P			
(4) 42W Triple Tube 4	-Pin (Amalgam) Compa	act Fluorescent Lamp			
F42TBX/*/A/4P	CF42DT/E/IN/*	PL-T42W/*/4P			
	Pin (Amalgam) Compa   CF57DT/E/IN/*	act Fluorescent Lamp   N/A			
(2) 70W Triple Tube 4	-Pin (Amalgam) Compa	act Fluorescent Lamp			
F70QBX/*/A/4P/EOL	CF70DT/E/IN/*	N/A			

<sup>\*</sup> Manufacturers' color temperature designation.

#### Electrical

#### Lampholders - Compact Fluorescent:

4-pin, 26/32 watt base: GX24q-3; 42 watt base: GX24q-4; 57 watt base: GX24q-5; 70 watt base: GX24q-6;

Ballast: Fluorescent Electronic

	4 x 26		4 x 32		4 x 42		2 x 57		2 x 70	
Voltage	120	277	120	277	120	277	120	277	120	277
Total Input Watts	110	110	136	136	186	186	129	129	155	155
Max. Line Current (Amps)	.92	.42	1.14	.50	1.56	.66	1.10	.48	1.31	.57

Power Factor >.98, Ballast Factor .98, THD <10%, Minimum Starting

#### Labels

cULus listed. Suitable for damp locations.

Industrex® is a registered trademark of AFG Industries, Inc.

Job Information	Туре:
lob Name:	
Cat. No.:	
.amp(s):	
lotes:	
lotes:	

Lightolier a Genlyte company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2005 Genlyte Group LLC • B0605