



AVVERTENZE

Le seguenti istruzioni devono essere seguite per la corretta installazione del sistema e servono a garantire la vostra sicurezza. È necessario conservarle per una successiva consultazione.
In caso di dubbio interpellare un installatore qualificato.



L'apparecchio è adatto al montaggio su superfici normalmente infiammabili.

L'apparecchio ha un grado di protezione IP54.

L'apparecchio è conforme alle norme e alle direttive vigenti.

Simbolo per lo smaltimento dell'apparecchio (vedere SMALTIMENTO DELL'APPARECCHIO – RAEE)

INSTALLAZIONE

- Prima e durante l'installazione dell'apparecchio togliere tensione; Installare l'apparecchio secondo le norme impianti vigenti;
- Estrarre l'apparecchio dall'imballo;
- Fissaggio a muretto preesistente con uscita cavi di alimentazione: fissare il palo (1) ad un muretto già esistente con adeguati tasselli (non forniti) tramite la flangia (A) con interasse 118mm; (fig.1-2);
- Fissaggio a terra con colata di cemento da realizzare: fare una gettata di cemento all'interno di un tubo (B) inserito a terra di diametro inferiore od uguale a quello della flangia (A);
- In entrambi i casi sarà necessario prevedere l'inserimento di tre prigionieri M8, inseriti nel muretto (1° caso) o affogati nella colata di cemento (2° caso). A tale scopo avvalersi della dima (D) in dotazione per il corretto posizionamento. (fig.3)
- **ATTENZIONE**: non montare il palo a parete;
- Controllare la guarnizione nell'attacco per il palo (2);
- Collegare il cavo di alimentazione al connettore (3);
- Posizionare l'apparecchio sulla testa del palo e stringere le due viti a brugola (4);
- Aprire il vano ottico allentando i pomelli (5), inserire la lampadina sul portalampada e rimontare il tutto correttamente.

CAUTELE DA ADOTTARE DURANTE L'USO O MANUTENZIONE DELL'APPARECCHIO

- Durante la manutenzione (per sostituzione lampadina o pulizia) togliere tensione;
- Per la sostituzione della lampada, togliere lo schermo di protezione allentando i pomelli (5); si consiglia di sostituire lo starter anche se funzionante;
- Per la pulizia utilizzare solamente un panno asciutto o leggermente umido. Non usare prodotti abrasivi;
- Non coprire l'apparecchio.

NOTE SUPPLEMENTARI

- Per la vostra sicurezza non modificare l'apparecchio. Contattare il rivenditore in caso sia necessario procurarsi parti di ricambio.

Fig.1


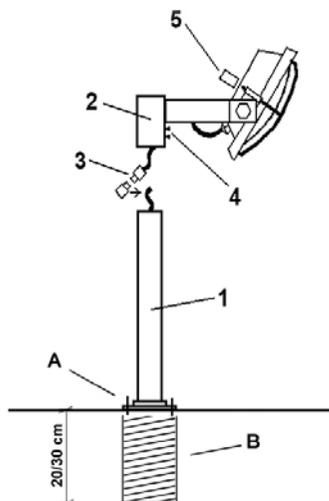


Fig.2



Fig.3

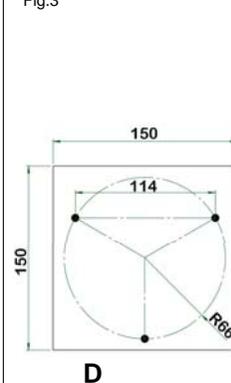

WARNING

The following instructions must be followed for a correct installation of the product, and serve to guarantee your safety. Please retain for future reference and make available to those that maintain the product.
If in doubt, please seek the advice of a qualified installer.



The device is suitable for mounting on normally inflammable surfaces.

The device has a IP54 degree protection;

The device conforms to current directive and norms.

Symbol for product disposal (see DISPOSAL OF THE APPLIANCE – RAEE).

INSTALLATION

- Before and during the installation of the device switch off the mains power supply;
- Install the device with the current system norms;
- Remove the device from the packaging;
- Fixing at existing wall with exit power supply cables: Fix the pole (1) to a garden wall with the base (A) with wheel base 118mm or with a concrete-casting internal the tube (B) inside the terrain. (fig.1-2)
- Fixing to ground with cement cast to realize: Make a cement casting internal tube (B) inside the terrain with diameter lower then base (A);
- Both cases you must insert tre pivot M8. You can use for their placement plate (D) in supply. (fig.3)
- **WARNING**: Don't fix the pole at wall;
- Control the gasket in the attack of the pole (2);
- Connect the power cables at he connector (3);
- Insert the device at the head of the pole and screw up (4);
- Open the optical bay unscrewing the knobs (5), insert the bulb into the lamp socket and reassemble all correctly.

CAUTION TO BE ADOPTED DURING USE OR MAINTENANCE OF THE DEVICE

- During maintenance (to replace bulb or cleaning) disconnect power;
- To replace the bulb, remove the protection screen by loosening the knobs (5); we recommend the substitution of the starter, although it works;
- Clean using a dry or damp cloth. Do not use abrasive products.

ADDITIONAL NOTES

- For your safety do not modify the device. Contact the vendor in case it is necessary to procure spare parts.

Fig.1

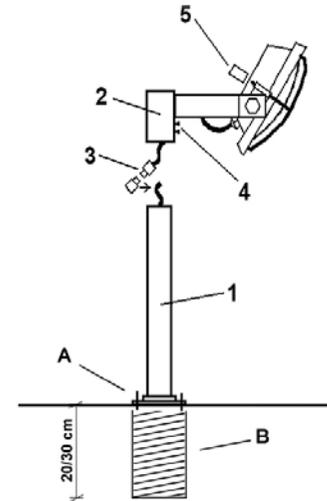


Fig.2



Fig.3

