
Page 1 of 1

Indoor/Outdoor Wall Mounted Compact Fluorescent/Incandescent

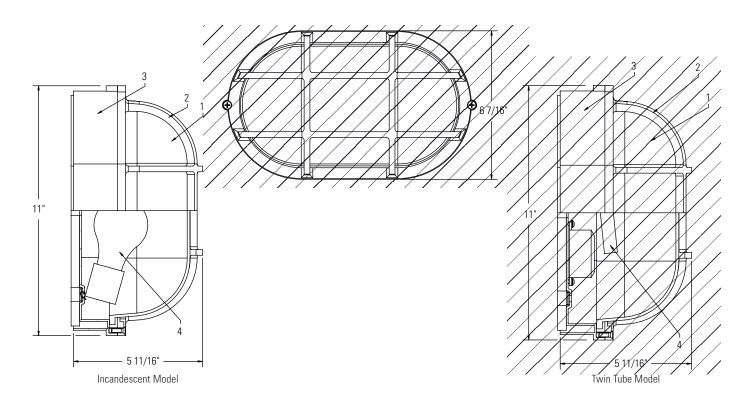

Ordering Information:

Cat. No.	Height	Width	Extension	Finish	Voltage	Lamps (by others)	
3652WH				White			General Electric
3651BZ	11"	6 7/16"	5 11/16"	Bronze	120V	(1) 100W A19 MAX	F9BX/SPX/*
3660BK				Black			Osram/Sylvania
3622WH				White			CF90S/*
3621BZ	11"	6 7/16"	5 11/16"	Bronze	120V	(2) 7W or 9W Twin 2-pin (G23 base)	Philips
3610BK				Black			PLS9W/*

Features

- 1. Diffuser: Pressed ceramic coated glass.
- 2. Diffuser Housing: Die-cast aluminum guard.
- 3. Backplate: 11 ga. aluminum.
- 4. Lamp: See Lamps.
- 5. Ballast: See Electrical/Ballast.

Electrical/Ballast

	9W			
	NPF			
	120V			
Total Input Watts	20			
Max. Line Current (amps)	.36			
Ballast Factor	.90			
THD	< 20%			
Min. Starting Temperature	-4°C (-25°F)			

Mounting

Wall Mount to standard 4" octagonal outlet box.

Can be mounted in a vertical or horizontal position on a wall.

Labels

UL Listed. Suitable for Wet Locations.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • C1208

