


Page 1 of 1

Close-to-Ceiling Compact Fluorescent 3 Lt. 39W Twin Tube

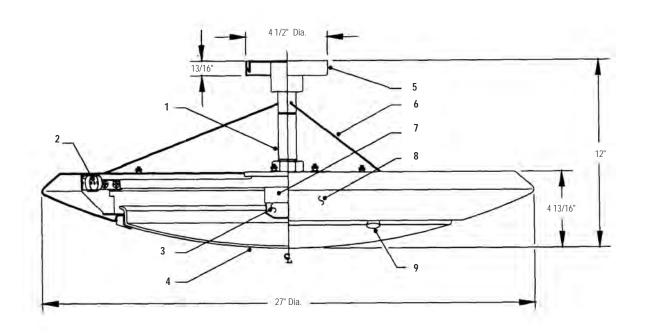

Catalog No.	Finish	Lamps	Diameter	Height
40722WH	Matte White	3-36/39W Twin Tube	27"	12"
40722PC	Polished/Satin Chrome	Compact Fluorescent (2G11 base) F39BX by G.E. FT36DL by Osram-Sylvania PL-L 36W by Philips		

Features

- 1. Center Stem: 1" O.D. steel tubing.
- 2. Socket: (3)
- 3. Ballast: 3 Lt. electronic.
- 4. Diffuser: White translucent acrylic.
- 5. Canopy: 18 Ga. aluminum.
- 6. Suspension Cable: 1/16" Dia. stranded steel.
- 7. Ballast Cover/Splice Compartment: 20 Ga. steel, white finish.
- 8. Reflector Housing: 20 Ga. steel for white, 14 Ga. alum. for satin chrome finish.
- 9. Holder Knob: (3) Die-cast aluminum alloy.

Electrical

3 Lt. Rapid Start, High Power Factor, Class "P" electronic ballast. Min. starting temp. 0°F. Input voltage 120V Input watts = 77W.

Mounting

Mounts directly to outlet box using crossbar assembly supplied.

Finish

All painted surfaces, baked enamel.

Labels

UL (Suitable for damp locations), I.B.E.W.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902