

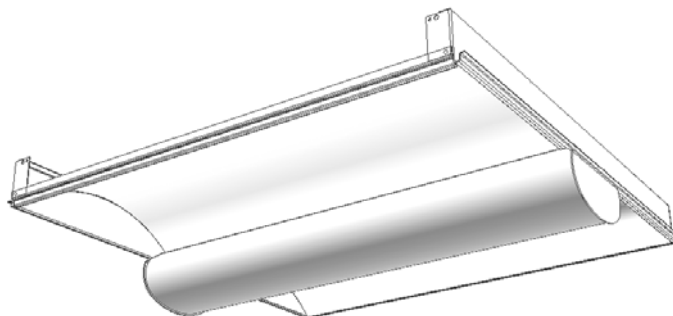


Features


- 77.1% efficient (2 lamp, 24W).
- 72.1% efficient (2 lamp, 14W).
- Only 2-1/4" plenum depth.
- Direct/indirect appearance with soft contoured interior.
- Same fixture fits both G and T ceiling types.
- Fits flush to face of slot grid (T) ceiling.
- Lens encloses lamp compartment.
- Translucent DR acrylic linear prismatic lens.
- Tension screws secure ends to body.
- Lamp shield opens from either side.
- Ballast accessible from room side.
- Wiring access plate standard.
- Optional DALI ballast i GEN TECHNOLOGY accepts digital dimming controllers, scene controllers and automatic control devices.
- Construction meets NYC Code / Chicago Plenum available.





Mounting Methods



Features

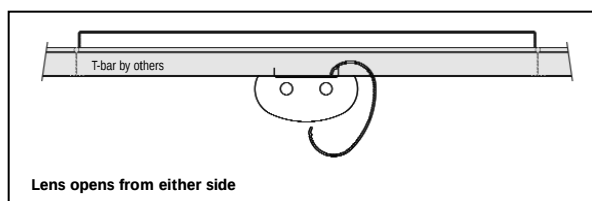

Dimensions

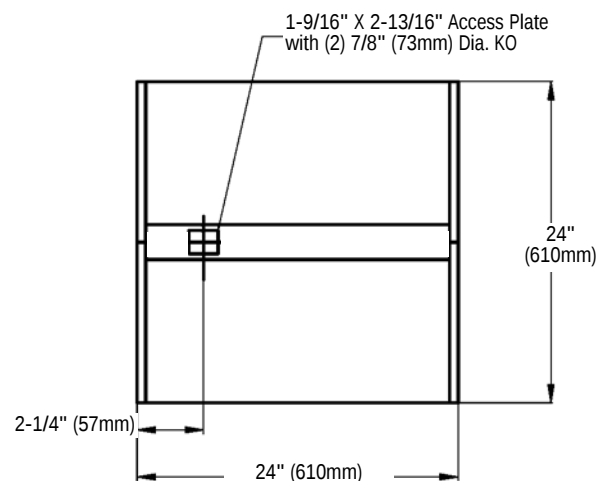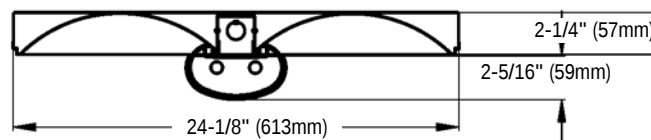

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

For Factory Technical Information: (978) 657-7600 • Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 a Philips Group

11/08

Section 5/Folio M33-35

