


READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE PROCEEDING.
RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at electrical panel before proceeding.


DO NOT INSTALL THIS SYSTEM IN A WET OR DAMP LOCATION.
DO NOT ENERGIZE ANYTHING OTHER THAN THE FIXTURES IN THE SYSTEM.

THE FIXTURES IN THIS SYSTEM HAVE A POLARIZED MALE AND FEMALE PLUG AT EACH END, THESE PLUGS WILL SNAP TOGETHER.


CONTRACTOR IS RESPONSIBLE FOR ADEQUATELY REINFORCING CEILING AND WALL TO SUPPORT FIXTURE WEIGHT.

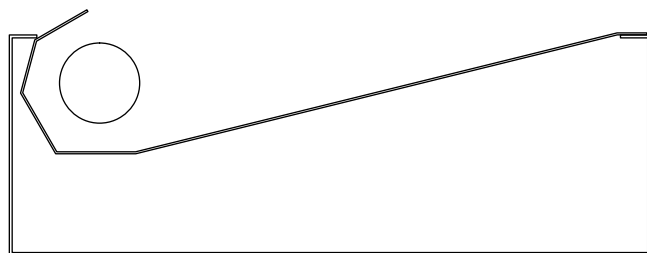


One T8 Lamp

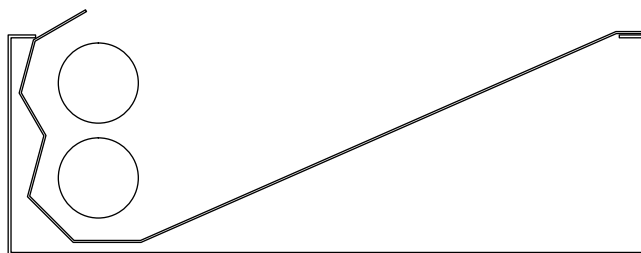


Two T8 Lamps

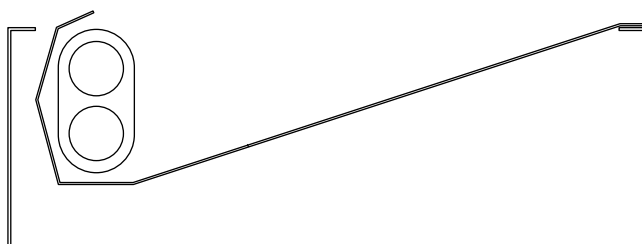

One Biax Lamp

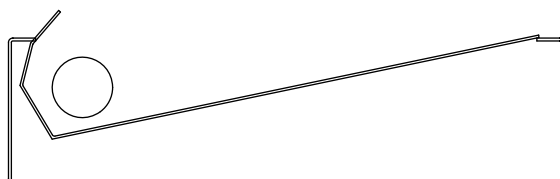

One T5 Lamp

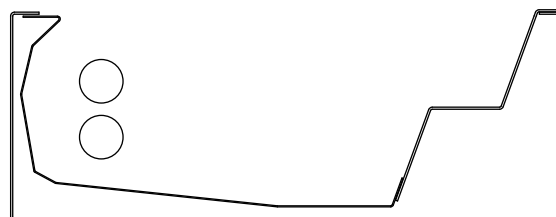

Two T5 Lamps

INSTALLATION STEPS

Step 1.

The run is intended to be installed from left to right.

Step 2.

For continuous runs, remove one end cap and connect the electrical color-coded quick connectors to the next fixture in the run. The wires are run below the reflector and above the joining spline.

Step 3.

Place the remaining fixtures in line and use the nut and screw located on the end cap to secure the fixtures together.