

INSTRUCTIONS FOR ASSEMBLING AND INSTALLING FIXTURE**READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE.**

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.

CAUTION: FOR WET LOCATIONS, IN ACCORDANCE WITH UNDERWRITERS LABORATORIES REQUIREMENTS, A LINE OF CAULKING COMPOUND SUCH AS ACRYLIC LATEX OR BUTYL MUST BE PLACED AROUND THE BACK OF THE FIXTURE, APPROXIMATELY 1/2" FROM THE EDGES, IN ORDER TO SEAL WATER AWAY FROM THE OUTLET BOX AND BACK OPENINGS.

1. Disassemble fixture by removing LATCH SCREW (visible at bottom). HOUSING "hinges" up for removal. See Fig. 3.
 2. Remove appropriate knockouts in back of fixture to match outlet box.
 3. Make connections: Black fixture lead or fixture lead without tracer mark to black supply lead; white fixture lead or fixture lead with tracer mark to white supply lead. Uninsulated wire is GROUND WIRE and must be connected to a grounding terminal or ground wire in OUTLET BOX. Use WIRE NUTS (local hardware item). Place connections in OUTLET BOX. See Fig. 2.
 4. Secure FIXTURE BODY to OUTLET BOX with OUTLET BOX SCREWS (provided in OUTLET BOX).
 5. Mount diffuser HOUSING to FIXTURE BODY by tilting HOUSING to engage LUG with BRACKET on FIXTURE BODY. Swing HOUSING into position, seating against GASKET. See Fig. 3.
 6. Press HOUSING into alignment against GASKET and secure with LATCH SCREW. See Fig. 3.
- NOTE:** Mount with LATCH SCREW in down position.

CAUTION: USE ONLY CORRECT WATTAGE LAMP, AS MARKED ON FIXTURE. MINIMUM TEMPERATURE FOR STARTING IS 32°F.

**LAMPS-USE: PL BY PHILIPS
TT BY SYLVANIA
DULUX® S BY OSRAM
BX BY GENERAL ELECTRIC**

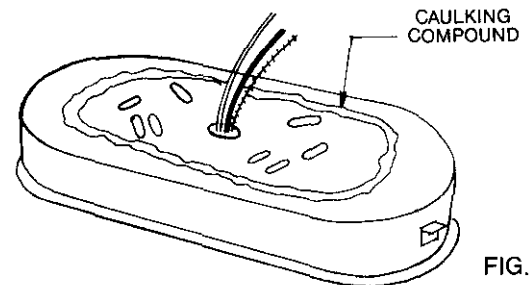


FIG. 1

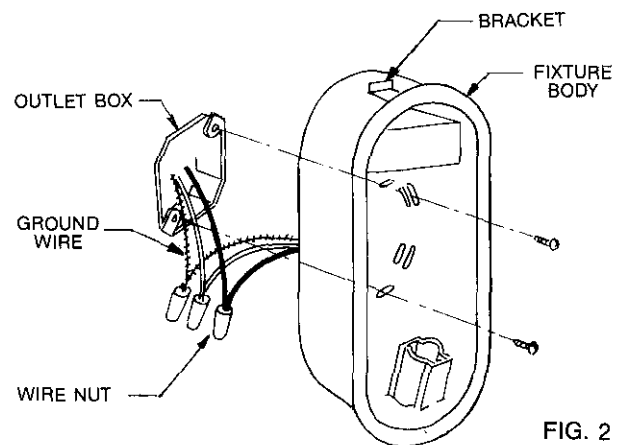


FIG. 2

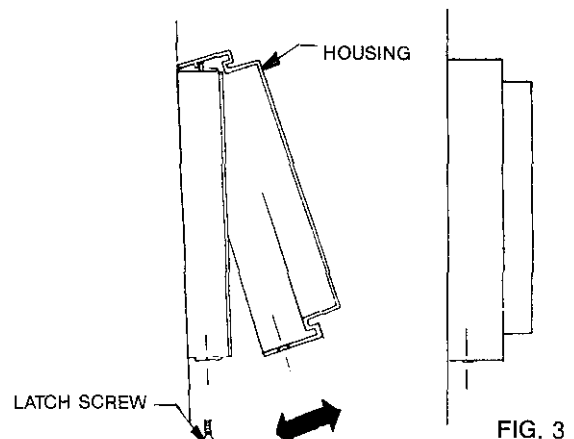
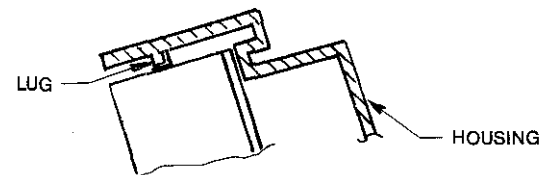


FIG. 3