

Ordering Information

Style	Type	Mounting	Length	Total Lamps	Color	Ballast & Voltage
CD7	1				WH	
	1 = Direct Louver	1 = Surface 2 = Cable 3 = Stem 4 = Wall	4 = 4-foot 8 = 8-foot	2 = 2-Lamp T8 per fixture (4' fixture) 4 = 2-Lamp T8 per fixture (8' fixture)	White	E81 = T8 Electronic 120V E82 = T8 Electronic 277V HD1 = T8 Electronic PowerSpec® HDF Dimming 120V HD2 = T8 Electronic PowerSpec® HDF Dimming 277V M71 = T8 Electronic Dimming Ballast 120V M72 = T8 Electronic Dimming Ballast 277V

Complete ordering instructions below.

For all fixtures represented in this family please refer to the brochure and/or additional specification sheets.

Features

- Housing:** Extruded aluminum. Die-cast end cap mechanically attached with no exposed fasteners. Concealed access holes in end plate for through wiring.
- Lamping:** Two T8 32 watt fluorescent lamp, as specified. Provided by others.
- Reflector:** Accurate parabolic-shaped, die-formed semi-specular anodized aluminum reflector with 36° shielding crosswise.
- Louvers:** Parabolic-shaped, die-formed semi-specular anodized aluminum. Provides low brightness in lengthwise and crosswise views with 37° shielding lengthwise. Concealed latches operate from either side.

Electrical

Specify 120 volt or 277 volt. 3 conductor, 18 gauge wire. Color-coded quick connectors allow ease of connection for joiner modules. For special circuiting, consult factory. Rapid start, HPF, class "P" thermally protected. PowerSpec HDF dimming ballast is available. Factory installed ballast disconnect allows the ballast to be disconnected from and reconnected to incoming power under load with out turning the entire circuit off.

Mountings

Cable Suspension (not shown) - 1-1/2" (3.81cm) and 4-1/2" (11.43cm) diameter flat canopy finished enamel white, 1/16" (0.16cm) diameter stainless steel aircraft cable adjustable up to 36" (91.44cm), adjustable cable gripper.

Stem Mounting (not shown) - 4-1/2" (11.43cm) diameter flat canopy, 1/2" (1.27cm) diameter rigid-mounted stem. White finish. Can be cut to length on job. Self-aligning swivel provides adjustability up to 42° of slopes.

Surface & Wall Mounting (not shown) - consult factory for availability.

Finish

Powder coated baked white enamel. Custom colors available, consult factory.

Options and Accessories

Emergency batteries available.

Ordering Instructions

Individual Fixtures:

- Order number of FIXTURES (fixture comes complete with end caps, mounting hardware and power feeds).

Continuous Rows:

- Determine run length.
- Order the appropriate number of FIXTURES for the complete run. Fixtures can be bolted together and through wired to complete long runs.

Labels


UL, cUL and I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • C1008

Performance and Quick Calculators

CANDLEPOWER CURVE

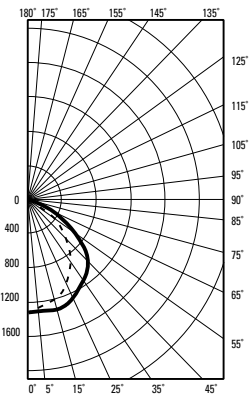

REPORT NO: LRL 699-4B
LAMP: 2-32WT8
LUMENS: 2900
EFFICIENCY: 53.0%

CANDLEPOWER

ZONE DEG.	0	22	45	67	90
90	0	0	0	0	0
85	1	2	3	3	4
75	12	13	18	17	15
65	36	42	66	106	104
55	210	278	444	553	582
45	702	790	888	1016	1063
35	1042	1118	1182	1293	1354
25	1242	1290	1343	1405	1418
15	1378	1398	1439	1482	1474
5	1440	1443	1449	1448	1454
0	1443	1443	1443	1443	1443

COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY REFLECTANCE




ROOM CAVITY RATIO	% WALL REFLECTANCE								
	80			70			50		
	50	30	10	50	30	10	50	30	10
0	63	63	63	62	62	62	59	59	59
1	58	56	55	57	55	54	55	53	52
2	53	51	49	52	50	48	51	49	47
3	49	46	44	48	46	43	47	45	43
4	45	41	39	44	41	39	43	40	38
5	41	38	35	41	37	35	40	37	34
6	38	34	31	37	34	31	36	33	31
7	34	31	28	34	30	28	33	30	28
8	31	28	25	31	27	25	30	27	25
9	29	25	22	28	25	22	28	25	22
10	25	21	19	25	21	19	24	21	19

20% FLOOR CAVITY REFLECTANCE


ZONAL LUMEN SUMMARY

ZONE	LUMENS	% BARE LAMP	% LUMINAIRE
0-90	3076	53.0	100.0
90-180	0	0.0	0.0
0-180	3076	53.0	100.0


Fixture Lengths & Mounting Locations

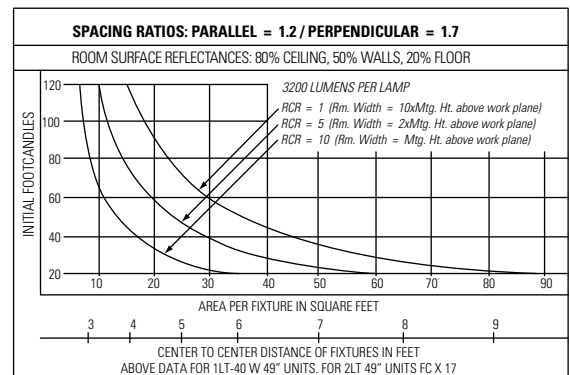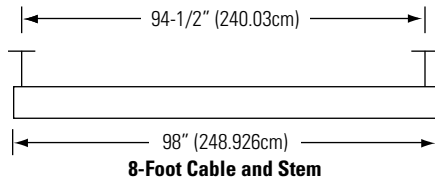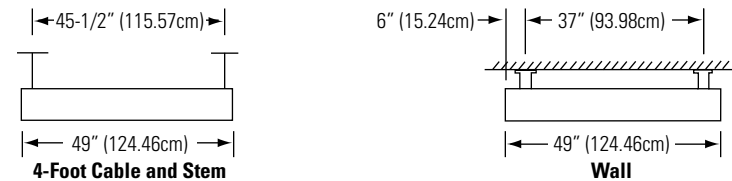

Sample Run

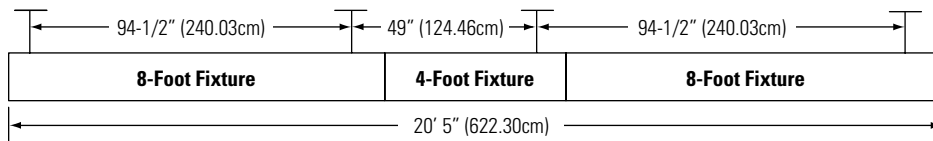

Mounting Details

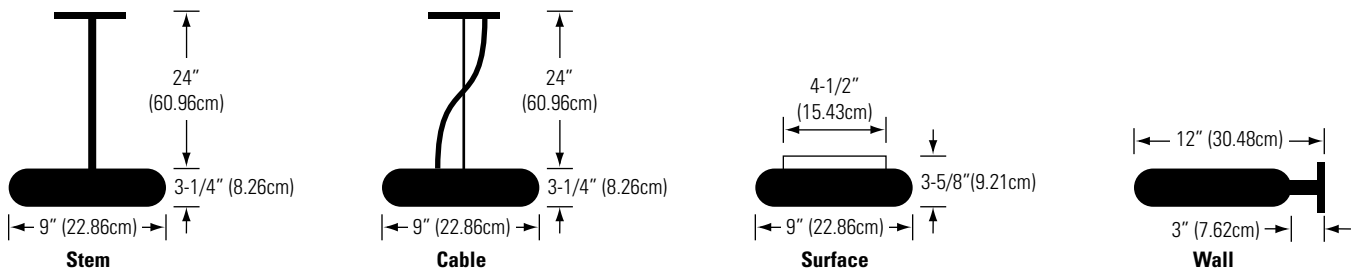

Job Information Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • C1008