


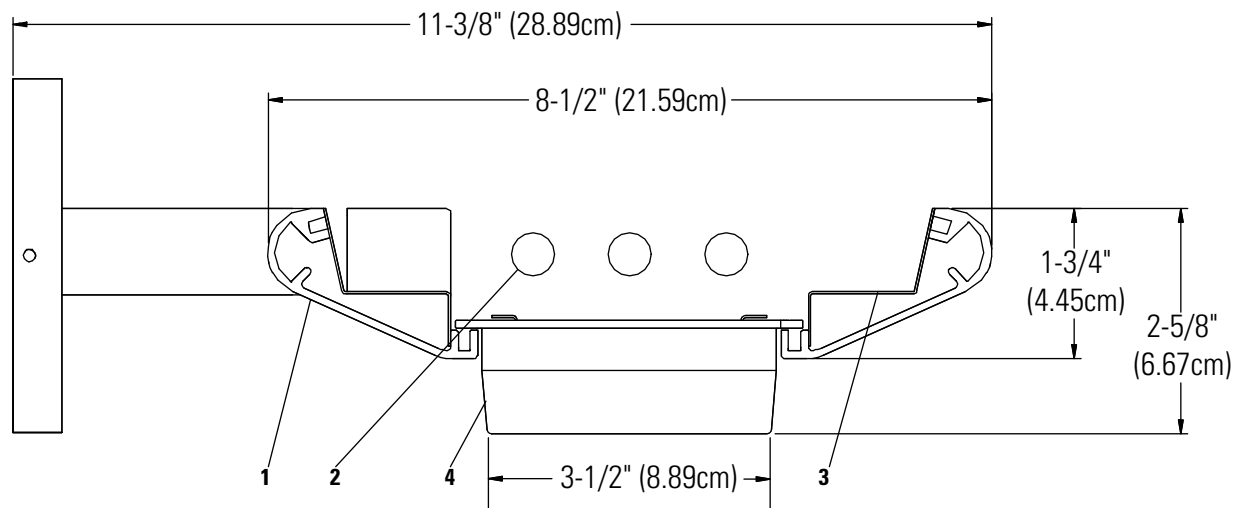

Ordering Information

Type	Lamps	Length	Shielding	Ballast	Voltage	Finish
LSBW	3	4 = 4-Foot 8 = 8-Foot	C = Parabolic Louver	28 = 28W T5 54 = 54W T5 5E = 54W T5 Emergency Pack 2E = 28W T5 Emergency Pack 5D = 54W T5 Dimming	1 = 120 Volt 2 = 277 Volt	AL = Aluminum WH = White

Complete ordering instructions below.

Features

- Housing:** Extruded aluminum. Die-cast end cap mechanically attached with no exposed fasteners or hardware.
- Lamping:** Three T5, 28 or 54 watt (as specified) fluorescent lamps per 4-foot nominal section. Provided by others.
- Reflector:** Precision die-formed, semi-specular aluminum.
- Shielding:** Parabolic louver, low-iridescent, semi-specular anodized aluminum 41" (104.14cm) shielding lengthwise, blades are 1-1/3" (3.39cm) high and 2" (5.08cm) O.C. Louver frame is extruded aluminum and finished to match housing.

Electrical

Ballast - <10% T.H.D., .98 ballast factor, pre-heat start. 18 gauge wire. Color-coded quick connectors allow ease of connection for joiner modules. For special circuiting, consult factory. Factory installed ballast disconnect allows the ballast to be disconnected from and reconnected to incoming power under load without turning the entire circuit off.

Dimming - 120/277 VAC, 1% dimming level.

Emergency Battery Pack - 28 Watt: 520 Lumens @ 90 min.
54 Watt: 700 Lumens @ 90 min.
4 wire feed required.

Mountings

Dual-screw, draw-tight connector to create hairline seam between joiner modules.

Finish

Powder coated baked white or aluminum finish.
Custom colors available, consult factory.

Labels

UL, cUL and I.B.E.W.

Ordering Instructions

Individual Fixtures:

- Order number of MODULES required.
- Order one END SET per MODULE.

Continuous Rows:


- Determine run length.
- Order the appropriate number of MODULES to complete the run.
- Order one END SET per run.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B0908

Performance

Candlepower Curve

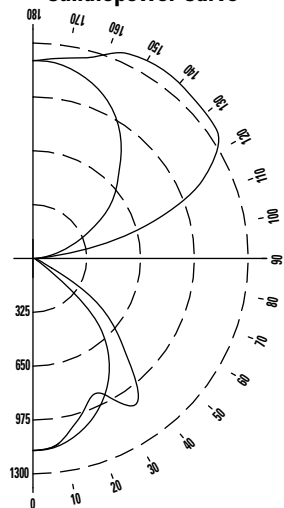

Report No: LRL 300-1M
Cat No: LSB34C28
Lamps: 3 F28T5
Lumens: 2900
Efficiency: 83.7%

Candlepower Summary

ZONE DEG.	0	22	45	67	90
	CANDELAS				
180	1194	1194	1194	1194	1194
175	1191	1193	1202	1205	1209
165	1143	1167	1207	1353	1254
155	1056	1116	1207	1330	1363
145	918	1031	1199	1349	1384
135	734	901	1095	1313	1368
125	575	788	1038	1352	1354
115	365	617	936	1102	1136
105	184	471	634	644	645
95	46	125	105	86	81
90	0	0	0	0	0
85	2	2	7	6	7
75	5	11	14	16	17
65	7	13	22	40	64
55	91	147	281	446	456
45	556	587	730	765	781
35	804	760	821	1053	1078
25	971	936	899	880	897
15	1087	1077	1061	1031	1020
5	1153	1151	1160	1149	1150
0	1159	1159	1159	1159	1159

Calculations are for 28 watt T5 lamps. For 54 watt T5 lamps, multiply by 1.7.

COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY

REFLECTANCE


	80			70			50		
	70	50	30	70	50	30	50	30	10
0	86	86	86	77	77	77	61	61	61
1	79	76	73	71	68	66	54	53	52
2	73	68	63	66	61	58	49	47	45
3	67	61	55	61	55	50	44	41	39
4	62	54	48	56	49	44	40	37	34
5	57	49	42	51	44	39	36	32	30
6	53	44	38	48	40	35	33	29	26
7	49	39	33	44	36	31	30	26	23
8	45	36	30	41	33	27	27	23	20
9	42	32	26	38	30	24	24	21	18
10	38	29	23	35	26	21	22	18	15

20% FLOOR CAVITY REFLECTANCE

ZONAL LUMEN SUMMARY


ZONE	LUMENS	% BARELAMP	% LUMINAIRE
0 - 90	2229	25.6	30.6
90 - 180	5056	58.1	69.4
0 - 180	7285	83.7	100.0

Fixture Lengths & Mounting Locations

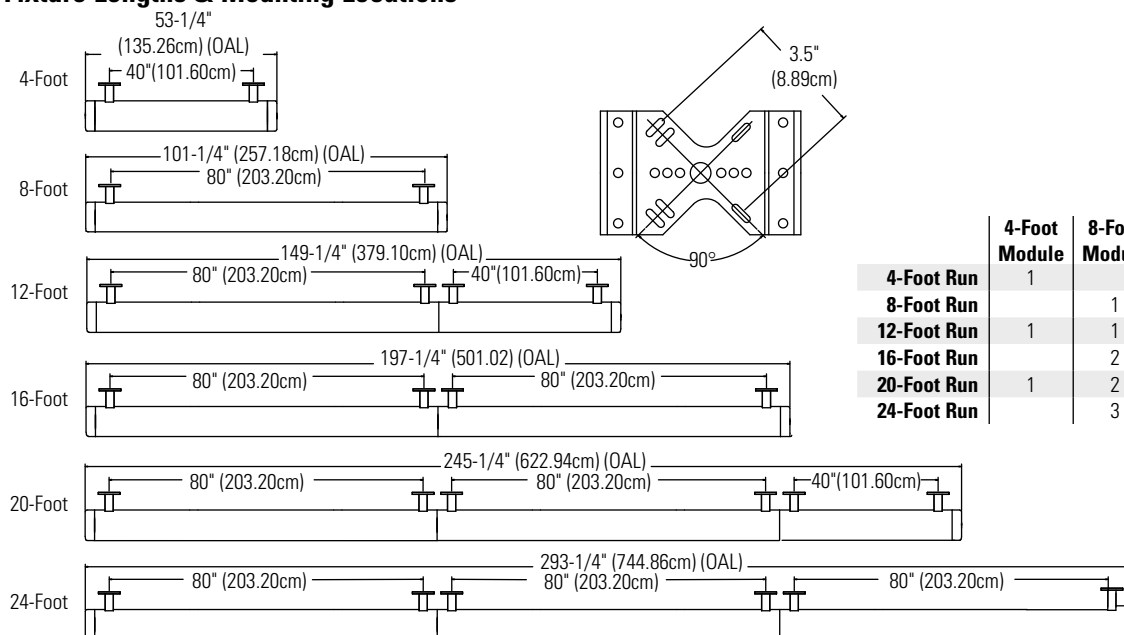

	4-Foot Module	8-Foot Module	LSBWE
4-Foot Run	1		1
8-Foot Run		1	1
12-Foot Run	1	1	1
16-Foot Run		2	1
20-Foot Run	1	2	1
24-Foot Run		3	1

Accessories



End Set : LSBWEWH: White
 LSBWEAL: Aluminum
 Order one per run of fixtures.

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • B0908