



**2027/2000P1**  
Standard Incandescent

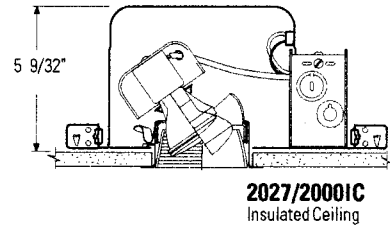

**2027/2000IC**  
Insulated Ceiling

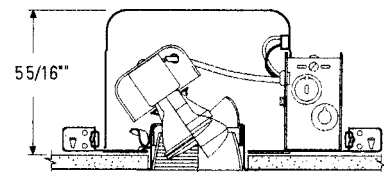

**2027/2000AIC**  
Air Seal® Insulated Ceiling

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim		Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
<b>2027†</b>	Matte Black Step Baffle	Incandescent			
<b>2027WH</b>	Matte White Step Baffle	Frame-In Kit	Installation Type	Lamping	Height
<b>2029CL†</b>	Specular Clear	<b>2000P1</b>	Standard Non-IC	50W PAR20 75W PAR16, R20	5 9/32"
<b>2029CD†</b>	Clear Diffuse	<b>2000IC</b>	IC	50W, PAR 20	5 9/32"
<b>2029GD†</b>	Specular Gold	<b>2000AIC</b>	IC	45W PAR16	5 5/16"
<b>2029BK†</b>	Specular Black				
<b>2027BNM</b>	Natural Metal™ baffle with Natural Metal™ Flange				

† = add "NM" to sku for Natural Metal™ Flange

## Features

- 1. Aperture:** Aluminum step baffle or cone.
- 2. Lamp Holder Assembly:** Provides 358° horizontal rotation and 0° – 35° vertical adjustment.
- 3. Trim Housing:** Hydroformed aluminum 0.040" (16 ga.) thick. Matte white Natural Metal™ trim flange.
- 4. Frame-In Kit:** (2000P1 standard frame shown.) Other frame shown on the right. See Frame-In Kit specification sheets for more details.


## Labels

UL (Suitable for Damp Locations), I.B.E.W

US Patent Numbers: 5,045,985

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2006 Genlyte Group LLC • B0906



**Lighting Performance Data**

PAR Lamps:		Narrow				Medium											
L	Beam length	W	Beam width														
D	Distance	A	Aiming angle														
FC	Footcandles																
	Data based on bare lamp photometrics. Dashed lines in beam spreads indicate narrow axes of oval shaped beams. L and W are the outer points where the candlepower drops to 50% of the maximum. FC is the initial footcandles at the center of beam.																
	Footcandles (On Beam Center at 6')	128	139	35	36												
	Beam Spread (To 50% Max. CP)	12°	12°	32°	30°												
	Max. Candlepower(Candelas)	4600	5000	1250	1300												
	Rated Life (Hours)	2000	2000	2000	2000												
0° AIMING ANGLE	 Illumination on Horizontal Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
6'		128	1.3'	1.3'	6'	139	1.3'	1.3'	3'	139	1.7'	1.7'	3'	144	1.6'	1.6'	
8'		72	1.7'	1.7'	8'	78	1.7'	1.7'	5'	50	2.9'	2.9'	5'	52	2.7'	2.7'	
10'		46	2.1'	2.1'	10'	50	2.1'	2.1'	7'	26	4.0'	4.0'	7'	27	3.8'	3.8'	
12'		32	2.5'	2.5'	12'	35	2.5'	2.5'	9'	15	5.2'	5.2'	9'	16	4.8'	4.8'	
30° AIMING ANGLE	 Illumination on Horizontal Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
5'		120	1.4'	1.2'	5'	130	1.4'	1.2'	3'	90	2.4'	2.0'	3'	94	2.2'	1.9'	
7'		61	2.0'	1.7'	7'	66	2.0'	1.7'	5'	32	3.9'	3.3'	5'	34	3.7'	3.1'	
9'		37	2.5'	2.2'	9'	40	2.5'	2.2'	7'	17	5.5'	4.6'	7'	17	5.1'	4.3'	
11'		25	3.1'	2.7'	11'	27	3.1'	2.7'	9'	10	7.1'	6.0'	9'	10	6.6'	5.6'	
30° AIMING ANGLE	 Illumination on Vertical Plane	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
2'		144	1.7'	0.8'	2'	156	1.7'	0.8'	1'	156	3.0'	1.1'	1'	163	2.7'	1.1'	
3'		64	2.6'	1.3'	3'	69	2.6'	1.3'	2'	39	6.1'	2.3'	2'	41	5.5'	2.1'	
4'		36	3.5'	1.7'	4'	39	3.5'	1.7'	3'	17	9.1'	3.4'	3'	18	8.2'	3.2'	
5'		23	4.3'	2.1'	5'	25	4.3'	2.1'	4'	10	12.2'	4.6'	4'	10	10.9'	4.3'	

**Beam Center Location**



This chart locates the distance **C** to the center of the light beam for various distance **D** when the lamp is aimed 30° from vertical, the preferred aiming angle for lighting pictures on the wall,

Distance <b>D</b> (ft.)	1	2	3	4	5	6	7	8	9	10
Distance <b>C</b> (ft.)	1.7	3.5	5.2	6.9	8.7	10.4	12.1	13.8	15.6	17.3

**Job Information**

**Type:**

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2006 Genlyte Group LLC • B0906