
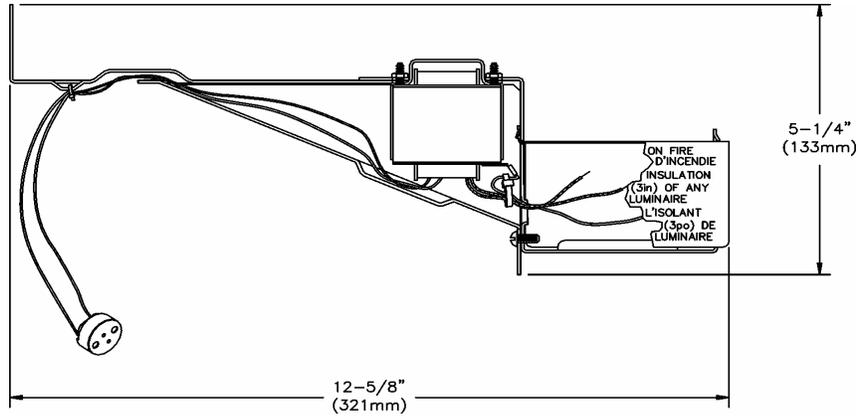


3 3/4" (95mm) aperture  
 Low Voltage 50W MR16 / 37W MR16 IR 12V  
 Remodeler (Non-IC)

**Lytecaster**  
**Recessed Downlight**

**300MRX**



Complete fixture consists of Reflector Trim & Power Pack. Select each separately

POWER PACK	CUT-OUT	REFLECTOR TRIM
300MRX	3-3/4" (95mm)	Accepts most 3-3/4" (95mm) 300 serie trims ; see Reflector Trim specification sheets.

**Features**

- Power Pack** : Ideal for remodeling. Integral junction box with snap-off covers permits wiring from below.
- Socket** : Porcelain body ; Two-pin (GX5.3 base) Pre-wired with 18 ga. Teflon 250° leads to junction box.
- Transformer** : 50VA Magnetic, 120 volt primary, nominal 12 volt secondary, class "H".
- Thermal Protector** : Meets CSA/UL requirements. Insulation, if used, must be kept 3" (76mm) away from luminaire sides and junction box.
- Branch Wiring** : Certified for branch circuit wiring ; 4 x 14ga min.90° C supply conductors.

**Labels : CSA , UL**

Damp or Wet location rated depending on trim used.

**Dimming**

**Dimming controls**: use only dimmers specifically designed for use with transformers, like Lightolier Onset, Sunrise series LV or VA dimmers, or any Lightolier Controls dimming system. Low voltage fixtures may produce audible noise. Attention should be given for noise sensitive applications.

**LIGHTOLIER®**

WE RESERVE THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS AND FINISH, IN ANY WAY THAT WILL NOT ALTER INSTALLED APPEARANCE OR REDUCE FUNCTION AND PERFORMANCE.