




4 3/4" (121mm) aperture  
Low Voltage MR16 12V  
IC Frame-In-Kit

Lytecaster  
Recessed Downlight

# 402MRIC9X

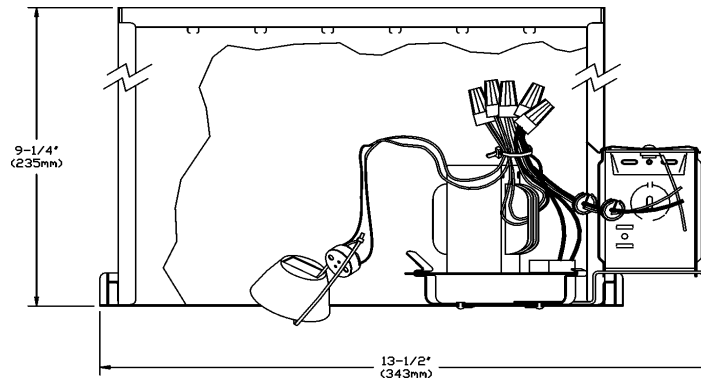

Complete fixture consists of Reflector Trim & Frame-in Kit. Select each separately

POWER PACK	CUT-OUT	REFLECTOR TRIM
402MRIC9X	4 3/4" (121mm)	Accepts all 4 3/4" (121mm) Low Voltage MR16 trims 400 series: see Reflector Trim specification sheets.

## Features

**Mounting Frame** : 20ga. galvanized steel. Four slots are positioned 90° apart to simplify alignment.

**Insulated Ceiling Housing** : 26ga. galvanized steel. CSA certified and UL listed for direct contact with thermal insulation.

**Internal thermal cut-out** : insures against overheating due to incorrect lamping.

**Mounting Bars** : (4) 18 ga. galvanized steel. 13" (330mm) long bars extend to 27" (686mm), rotatable and lockable, integral T-bar tabs. Spike detail eliminates the need of additional nailing.

**Mounting Bars Locking Clip** : (1) locks mounting bars in place.

**Socket** : Porcelain body ; Two-pin (GX5.3 base) Pre-wired with 18 ga. Teflon 250° leads to junction box.

**Transformer** : 75VA Magnetic, 120 volt primary, nominal 12 volt secondary, class "H".

**Junction Box** : 4"(102mm) x 3"(76mm) x 2"(51mm) 18 ga. galvanized steel . CSA/UL certified for maximum of 8 No. 12 ga. 90° C through branch circuit conductors. Integral cable clamp permit attachment of non metallic Loomex without need of additional connectors. Pry-out knock-outs accept BX cable. Easy access from both sides with snap-on covers.

## Accessories

**Mounting Bars Extenders** : 1964  
20" (508mm) long. Set of 2

**Mounting Bar Locking Clips** : 0098  
To lock mounting bars in place after installation. Set of 12.

**Vapor Barrier Extender** : VBE300  
Polyvinyl Air Vapour Barrier ; to comply with provincial legislation. For all non Air-Seal frame-In-Kits.

## Labels : CSA , UL

Damp or Wet location rated depending on trim used.

WE RESERVE THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS AND FINISH, IN ANY WAY THAT WILL NOT ALTER INSTALLED APPEARANCE OR REDUCE FUNCTION AND PERFORMANCE.

Lightolier CFI, 3015 Louis Amos Lachine, (Quebec) H8T 1C4

LIGHTOLIER®