


4 3/4" (121mm) aperture
Low Voltage MR16 12V
Standard Frame-In-Kit (Non-IC)

Lytecaster
Recessed Downlight

402MRX

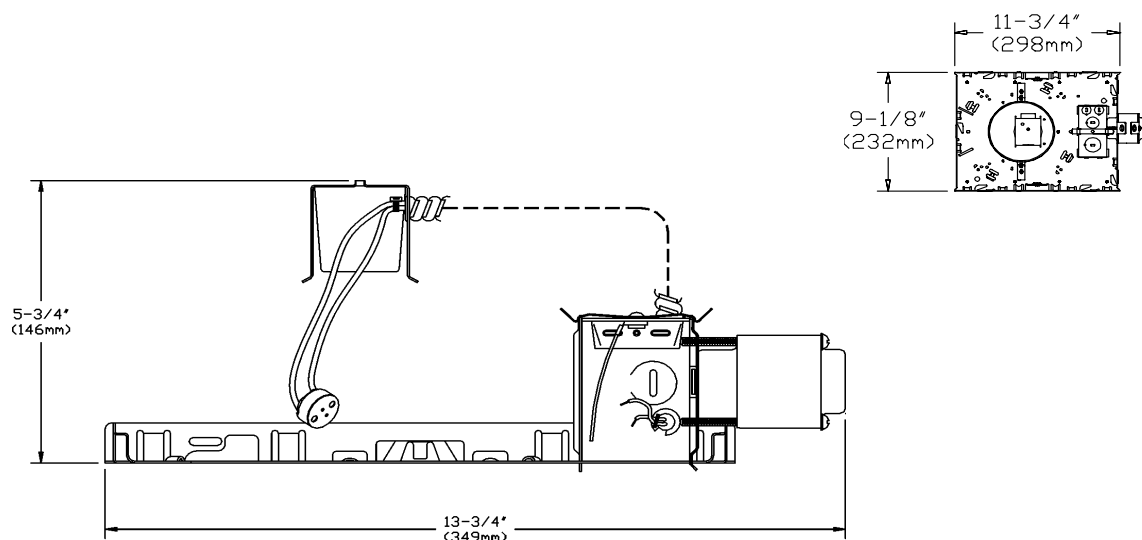

Complete fixture consists of Reflector Trim & Frame-in Kit. Select each separately

POWER PACK	CUT-OUT
402MRX	4 3/4" (121mm)

REFLECTOR TRIM
Accepts all 4 3/4" (121mm) Low Voltage MR16 trims 400 series: see Reflector Trim specification sheets.

Features

Mounting Frame : 20ga. galvanized steel. Four slots are positioned 90° apart to simplify alignment.

Mounting Bars : (4) 18 ga. galvanized steel. 13" (330mm) long bars extend to 27" (686mm), rotatable and lockable, integral T-bar tabs. Spike detail eliminates the need of additional nailing.

Mounting Bars Locking Clip : (1) locks mounting bars in place.

Snap-on Socket Cup : 22ga. galvanized steel. Easy snap-on to housing.

Socket : Porcelain body ; Two-pin (GX5.3 base) Pre-wired with 18 ga. Teflon 250° leads to junction box.

Transformer : 75VA Magnetic, 120 volt primary, nominal 12 volt secondary, class "H".

Thermal Protector : Meets CSA/UL requirements. Insulation, if used, must be kept 3" (76mm) away from luminaire sides and junction box.

Junction Box : 4"(102mm) x 3"(76mm) x 2"(51mm) 18 ga. galvanized steel . CSA/UL certified for maximum of 8 No. 12 ga. 90° C through branch circuit conductors. Integral cable clamp permit attachment of non metallic Loomex without need of additional connectors. Pry-out knock-outs accept BX cable. Easy access from both sides with snap-on covers.

Accessories

Mounting Bars Extenders : 1964
 20" (508mm) long. Set of 2

Mounting Bar Locking Clips : 0098
 To lock mounting bars in place after installation. Set of 12.

Labels : CSA , UL

Damp or Wet location rated depending on trim used.