
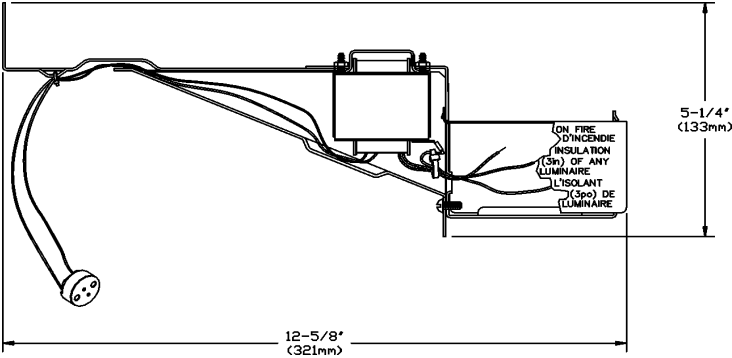


4 3/4" (121mm) aperture
Low Voltage MR16 12V
Remodeler (Non-IC)

Lytecaster
Recessed Downlight

400MRX

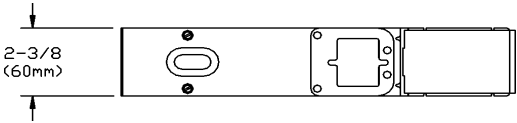

Complete fixture consists of Reflector Trim & Power Pack. Select each separately

POWER PACK	CUT-OUT	REFLECTOR TRIM
400MRX	4 3/4" (121mm)	Accepts all 4 3/4" (121mm) Low Voltage MR16 trims 400 series: see Reflector Trim specification sheets.

Features

Labels : CSA , UL

Power Pack : Ideal for remodeling. Integral junction box with snap-off covers permits wiring from below.

Socket : Porcelain body ; Two-pin (GX5.3 base) Pre-wired with 18 ga. Teflon 250° leads to junction box.

Transformer : 75VA Magnetic, 120 volt primary, nominal 12 volt secondary, class "H".

Thermal Protector : Meets CSA/UL requirements. Insulation, if used, must be kept 3" (76mm) away from luminaire sides and junction box.

Branch Wiring : Certified for branch circuit wiring ; 4 x 14ga min.90° C supply conductors.

Damp or Wet location rated depending on trim used.