

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim		Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
		Incandescent			
		Frame-In Kit	Ceiling Type	Lamping	Height
1129*	Black Step Baffle	1102P1	Non-IC	85W BR30, 90W PAR38	7 1/8"
1129WH	White Step Baffle	1103R	Non-IC Remodeler		7 1/8"
1129GD*	Specular Gold	1100IC	IC	85W BR30, 90W PAR38	7 5/16"
1129CL*	Specular Clear	1100AICM	AirSeal® IC		7 5/16"
1129BK*	Specular Black	1100DICM	Deep IC		9 1/4"
1129CD*	Clear Diffuse	1100DAICM	Deep AirSeal® IC		9 1/4"
1129BNM	Natural Metal Baffle w/Natural Metal Flange	1104ICX/N	AirSeal® IC	65W BR30 90W PAR38, BR40	7 1/4"

* = Add "NM" to SKU for Natural Metal™ Flange

Features

- 1. Reflector:** Hydroformed aluminum, .040" thick; white or Natural Metal™ trim flange.
- 2. Aperture:** Aluminum step baffle or cone, painted or anodized finish.
- 3. Lampholder Assembly:** Die-formed steel, .060" thick; permits adjustment; 358° horizontal and 0° to 30° vertical.
- 4. Frame-In Kit:** (1100IC insulated ceiling frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories

- Lytegems®:** See 1500 Specification Sheets.
- Retaining Clips:** **1955** - For installing in existing ceiling
- Extra Wide Flange Trim Ring:** **1954** - 8 5/8" O.D.

Labels

UL (Suitable for Damp Locations), I.B.E.W.

US Patent Numbers: 5,045,985
Other US & Foreign Patents Pending.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2006 Genlyte Group LLC • G1006




Lighting Performance Data		Narrow																			
		45W PAR38 NSP (T-H)	45W PAR38 SP (T-H)	75W PAR30 SP	90W PAR38 NSP (T-H)	90W PAR38 SP (T-H)															
DISTANCE 0' 1' 2' 3' 4' 5'																					
FOOTCANDLES (On Beam Center At 6') ▶		236	131	144	528	333															
BEAM SPREAD (To 50% Max. CP)		6°	14°	12°	7°	12°															
MAX. CANDLEPOWER (Candelas)		8,500	4,700	5,200	19,000	12,000															
RATED LIFE (Hours)		2,000	2,000	2,000	2,000	2,000															
0° AIMING ANGLE Illumination on Horizontal Plane																					
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
		7'	173	0.7'	0.7'	6'	131	1.5'	1.5'	6'	144	1.3'	1.3'	10'	190	1.2'	1.2'	8'	188	1.7'	1.7'
		10'	85	1.0'	1.0'	8'	73	2.0'	2.0'	8'	81	1.7'	1.7'	15'	84	1.8'	1.8'	12'	83	2.5'	2.5'
		13'	50	1.4'	1.4'	10'	47	2.5'	2.5'	10'	52	2.1'	2.1'	20'	47	2.4'	2.4'	16'	47	3.4'	3.4'
		16'	33	1.7'	1.7'	12'	33	2.9'	2.9'	12'	36	2.5'	2.5'	25'	30	3.1'	3.1'	20'	30	4.2'	4.2'
30° AIMING ANGLE Illumination on Horizontal Plane																					
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
		6'	153	0.8'	0.7'	5'	122	1.6'	1.4'	5'	135	1.4'	1.2'	8'	193	1.3'	1.1'	7'	159	2.0'	1.7'
		9'	68	1.3'	1.1'	7'	62	2.3'	2.0'	7'	69	2.0'	1.7'	12'	86	2.0'	1.7'	10'	78	2.8'	2.4'
		12'	38	1.7'	1.5'	9'	38	3.0'	2.6'	9'	42	2.5'	2.2'	16'	48	2.6'	2.3'	13'	46	3.7'	3.2'
		15'	25	2.1'	1.8'	11'	25	3.6'	3.1'	11'	28	3.1'	2.7'	20'	31	3.3'	2.8'	16'	30	4.5'	3.9'
30° AIMING ANGLE Illumination on Vertical Plane																					
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
		2'	266	0.8'	0.4'	2'	147	2.1'	1.0'	2'	163	1.7'	0.8'	4'	148	2.0'	1.0'	3'	167	2.6'	1.3'
		3'	118	1.3'	0.6'	3'	65	3.1'	1.5'	3'	72	2.6'	1.3'	6'	66	3.0'	1.5'	4'	94	3.5'	1.7'
		4'	66	1.7'	0.8'	4'	37	4.1'	2.0'	4'	41	3.5'	1.7'	8'	37	4.0'	2.0'	5'	60	4.3'	2.1'
		5'	43	2.1'	1.0'	5'	24	5.1'	2.5'	5'	26	4.3'	2.1'	10'	24	4.9'	2.4'	6'	42	5.2'	2.5'

Lighting Performance Data		Medium				Wide															
		45W PAR38 FL (T-H)	75W R30 SP	75W R38 FL	90W PAR38 FL (T-H)	75W R30 FL															
DISTANCE 0' 1' 2' 3' 4' 5'																					
FOOTCANDLES (On Beam Center At 6') ▶		47	43	52	111	11															
BEAM SPREAD (To 50% Max. CP)		28°	26°	30°	30°	81°															
MAX. CANDLEPOWER (Candelas)		1,700	1,540	1,860	4,000	400															
RATED LIFE (Hours)		2,000	2,000	2,000	2,000	2,000															
0° AIMING ANGLE Illumination on Horizontal Plane																					
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W				
		3'	189	1.5'	1.5'	4'	96	1.8'	1.8'	4'	116	2.1'	2.1'	6'	111	3.2'	3.2'	2'	100	3.4'	3.4'
		5'	68	2.5'	2.5'	6'	43	2.8'	2.8'	6'	52	3.2'	3.2'	8'	63	4.3'	4.3'	4'	25	5.8'	5.8'
		7'	35	3.5'	3.5'	8'	24	3.7'	3.7'	8'	29	4.3'	4.3'	10'	40	5.4'	5.4'	10'	11	10.5'	10.5'
		9'	21	4.5'	4.5'	10'	15	4.6'	4.6'	10'	19	5.4'	5.4'	12'	28	6.4'	6.4'	8'	6	13.7'	13.7'
30° AIMING ANGLE Illumination on Horizontal Plane																					
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W				
		3'	123	2.0'	1.7'	3'	111	1.9'	1.6'	5'	134	2.2'	1.9'	5'	104	3.7'	3.1'	2'	65	6.0'	3.9'
		5'	44	3.4'	2.9'	5'	40	3.1'	2.7'	7'	48	3.7'	3.1'	7'	53	5.1'	4.3'	4'	16	12.0'	7.9'
		7'	23	4.8'	4.0'	7'	20	4.4'	3.7'	9'	25	5.1'	4.3'	9'	32	6.6'	5.6'	6'	7	18.1'	11.8'
		9'	14	6.1'	5.2'	9'	12	5.6'	4.8'	11'	15	6.6'	5.6'	11'	21	8.1'	6.8'	8'	4	24.1'	15.8'
30° AIMING ANGLE Illumination on Vertical Plane																					
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W				
		1'	213	2.5'	1.0'	1'	193	2.2'	0.9'	1'	233	2.7'	1.1'	2'	125	5.5'	2.1'	1'	50	†	3.4'
		2'	53	4.9'	2.0'	2'	48	4.4'	1.8'	2'	58	5.5'	2.1'	3'	56	8.2'	3.2'	2'	13	†	6.8'
		3'	24	7.4'	3.0'	3'	21	6.6'	2.8'	3'	26	8.2'	3.2'	4'	31	10.9'	4.3'	3'	6	†	10.2'
		4'	13	9.8'	4.0'	4'	12	8.8'	3.7'	4'	15	10.9'	4.3'	5'	20	13.7'	5.4'	4'	3	†	13.7'

† Exceeds useable limits.

Data are based on bare lamp photometrics.

FC is initial footcandles at center of beam. L and W are to the point that the candlepower drops 50% of maximum

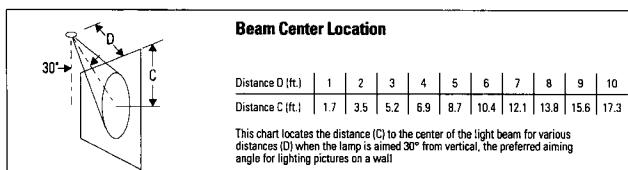

Job Information **Type:**

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 Genlyte Group LLC • G1006