

**Kramer Electronics, Ltd.**



# **USER MANUAL**

**Model:**

**VM-2HDMI**

***1:2 HDMI Distributor***

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Getting Started</b>	<b>1</b>
2.1	Quick Start	1
<b>3</b>	<b>Overview</b>	<b>3</b>
3.1	About HDMI	3
3.2	Defining EDID	4
3.3	Recommendations for Best Performance	4
<b>4</b>	<b>Your VM-2HDMI 1:2 HDMI Distributor</b>	<b>5</b>
<b>5</b>	<b>Using the VM-2HDMI 1:2 HDMI Distributor</b>	<b>6</b>
5.1	Connecting the VM-2HDMI 1:2 HDMI Distributor	6
5.2	Using the VM-2HDMI EDID SETUP Button	7
5.2.1	Acquiring / Changing the EDID	8
5.2.2	Acquiring the Clone EDID	8
<b>6</b>	<b>Technical Specifications</b>	<b>9</b>

## Figures

Figure 1: VM-2HDMI 1:2 HDMI Distributor	5
Figure 2: VM-2HDMI 1:2 HDMI Distributor (Top and Lower Side Panesl)	5
Figure 3: Connecting a VM-2HDMI 1:2 HDMI Distributor	7

## Tables

Table 1: VM-2HDMI 1:2 HDMI Distributor (Top and Lower Side Panels) Features	5
Table 2: Technical Specifications of the VM-2HDMI	9

## 1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront the video, audio, presentation, and broadcasting professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better! Our 1,000-plus different models now appear in 11 groups<sup>1</sup> that are clearly defined by function.

Congratulations on purchasing your Kramer DigiTOOLS® **VM-2HDMI 1:2 HDMI<sup>2</sup> Distributor**! The **VM-2HDMI** is ideal for:

- Home theater, presentation and multimedia applications
- Rental and staging

The package includes the following items:

- **VM-2HDMI 1:2 HDMI Distributor**
- Power adapter (12V DC Input)
- This user manual<sup>3</sup>

## 2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
- Use Kramer high performance high resolution cables<sup>4</sup>

### 2.1 Quick Start

This Quick start chart summarizes the basic setup and operation steps of the **VM-2HDMI**.

---

1 GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Matrix Switchers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters; GROUP 11: Sierra Products


2 High-Definition Multimedia Interface

3 Download up-to-date Kramer user manuals from the Internet at this URL: <http://www.kramerelectronics.com>

4 The complete list of Kramer cables is on our Web site at <http://www.kramerelectronics.com>

**Step 1: Connect the input and outputs - see section 5**

- 1 Connect the input
- 2 Connect the outputs

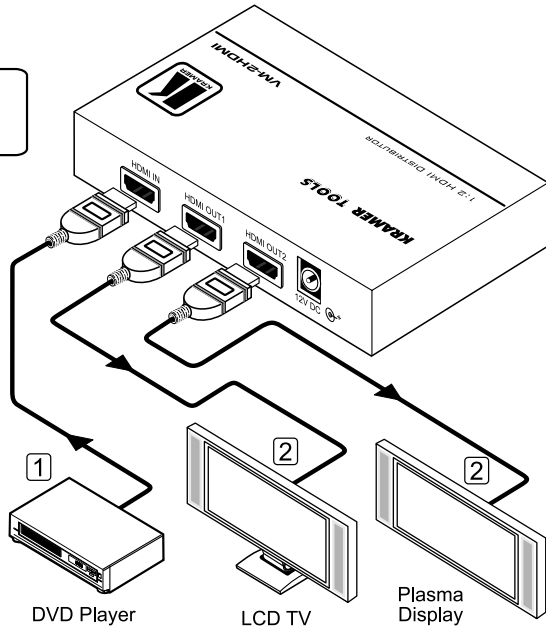

**Step 2: Turn the power ON**

**Step 3: Acquire the EDID if required - see section 5.2**

**ACQUIRE THE EDID**

- Connect the power supply
- Connect the new OUT display from which you want to acquire the EDID
- Press and hold the EDID SETUP button for more than 3 seconds and release. The two OUT LEDs blink alternately
- Press the EDID SETUP button again when the appropriate OUT LED lights

**ACQUIRE THE CLONE EDID**

- Connect the new OUT display from which you want to acquire the EDID
- Disconnect the power supply and then reconnect it while pressing the EDID SETUP button
- Release the EDID SETUP button when the appropriate OUT LED blinks

*To restore the default EDID, disconnect the outputs and repeat the above procedure*

### 3 Overview

The high quality **VM-2HDMI** accepts an HDMI input and distributes the signal to two outputs. In particular, the **VM-2HDMI**:

- Supports up to 1.65Gbps bandwidth per graphic channel<sup>1</sup>
- Can read and store, in non-volatile memory<sup>2</sup>, the EDID<sup>3</sup> block from either of the output display devices, so it can then provide the EDID information to the HDMI source even if the display device is not connected
- Has a default EDID for fast and efficient connection of the unit<sup>4</sup>
- Is 12VDC fed

#### 3.1 About HDMI

High-Definition Multimedia Interface (HDMI) is an uncompressed all-digital<sup>5</sup> audio/video interface, widely supported in the entertainment and home cinema industry. It delivers the highest high-definition image and sound quality.

In particular, HDMI<sup>6</sup>:

- Provides a simple<sup>7</sup> interface between any audio/video source, such as a set-top box, DVD player, or A/V receiver and video monitor, such as a digital flat LCD / plasma television (DTV), over a single lengthy<sup>8</sup> cable
- Supports standard, enhanced, high-definition video, and multi-channel digital audio<sup>9</sup> on a single cable
- Transmits all ATSC HDTV standards and supports 8-channel digital audio, with bandwidth to spare to accommodate future enhancements and requirements

---

1 Suitable for resolutions up to UXGA at 60Hz, and for all HD resolutions

2 While the machine is ON

3 EDID is Extended Display Identification Data (see section 5.2 for a detailed definition)

4 Lets you use the EDID default value when no display from which to read the EDID is connected

5 Ensuring an all-digital rendering of video without the losses associated with analog interfaces and their unnecessary digital-to-analog conversions

6 HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI licensing LLC

7 With video and multi-channel audio combined into a single cable, the cost, complexity, and confusion of multiple cables currently used in A/V systems is reduced

8 HDMI technology has been designed to use standard copper cable construction at up to 15m

9 HDMI supports multiple audio formats, from standard stereo to multi-channel surround-sound. HDMI has the capacity to support Dolby 5.1 audio and high-resolution audio formats

- Benefits consumers by providing superior, uncompressed digital video quality via a single cable<sup>1</sup>, and user-friendly connector
- Is backward-compatible with DVI (Digital Visual Interface)
- Supports two-way communication between the video source (such as a DVD player) and the digital television, enabling new functionality such as automatic configuration and one-button play

HDMI has the capacity to support:

- Existing high-definition video formats (720p, 1080i, and 1080p/60), as well as standard definition formats such as NTSC or PAL

### 3.2 Defining EDID

The Extended Display Identification Data (EDID<sup>2</sup>) is a data-structure, provided by a display, to describe its capabilities to a graphics card (that is connected to the display's source). The EDID enables the **VM-2HDMI** to "know" what kind of monitor is connected to the output. The EDID includes the manufacturer's name, the product type, the timing data supported by the display, the display size, luminance data and (for digital displays only) the pixel mapping data.

### 3.3 Recommendations for Best Performance

To achieve the best performance:

- Connect only good quality connection cables, thus avoiding interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoid interference from neighboring electrical appliances and position your **VM-2HDMI** away from moisture, excessive sunlight and dust



**Caution** – No operator-serviceable parts inside unit.

**Warning** – Use only the Kramer Electronics input power wall adapter that is provided with this unit<sup>3</sup>.

**Warning** – Disconnect power and unplug unit from wall before installing or removing device or servicing unit.

---

<sup>1</sup> HDMI provides the quality and functionality of a digital interface while also supporting uncompressed video formats in a simple, cost-effective manner

<sup>2</sup> Defined by a standard published by the Video Electronics Standards Association (VESA)

<sup>3</sup> For example: model number AD2512C, part number 2535-000251

## 4 Your VM-2HDMI 1:2 HDMI Distributor

Figure 1 illustrates the **VM-2HDMI 1:2 HDMI Distributor**:

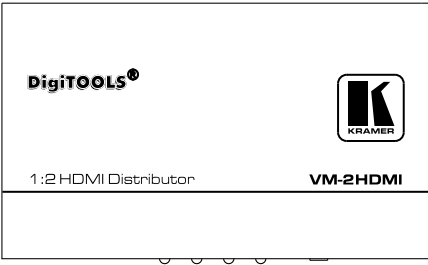


Figure 1: VM-2HDMI 1:2 HDMI Distributor

Figure 2 and Table 1 define the top and lower side panels:

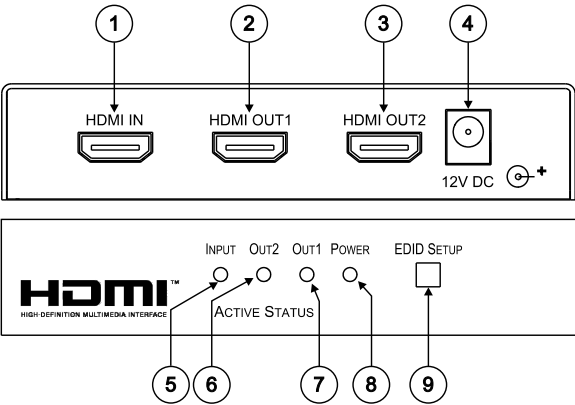


Figure 2: VM-2HDMI 1:2 HDMI Distributor (Top and Lower Side Panels)

Table 1: VM-2HDMI 1:2 HDMI Distributor (Top and Lower Side Panels) Features

#	Feature	Function
1	HDMI IN	Connects to the HDMI source
2	HDMI OUT1	Connects to the HDMI acceptor 1
3	HDMI OUT2	Connects to the HDMI acceptor 2
4	12V DC	+12V DC connector for powering the unit
5	INPUT LED	Blinks when the stored EDID does not match the display device EDID; illuminates when the EDID corresponds to the display device and that HDMI source is active
6	OUT2 LED	Blinks during the EDID setup; illuminates when output 2 is connected
7	OUT1 LED	Blinks during the EDID setup; illuminates when output 1 is connected
8	POWER LED	Illuminates when receiving power
9	EDID SETUP Button	Press for more than 3 seconds to acquire the EDID information from the display

## 5 Using the VM-2HDMI 1:2 HDMI Distributor

This section describes how to connect the **VM-2HDMI** (see section 5.1) and how to use the EDID SETUP button (see section 5.2).

### 5.1 Connecting the VM-2HDMI 1:2 HDMI Distributor

To connect the **VM-2HDMI**, as the example in Figure 3 shows, do the following<sup>1</sup>:

1. Connect the HDMI source (for example, a DVD) to the HDMI IN connector.
2. Connect the HDMI OUT connectors<sup>2</sup> to up to 2 HDMI acceptors, as follows:
  - HDMI OUT1 connector to HDMI acceptor 1 (for example, an LCD TV)
  - HDMI OUT2 connector to HDMI acceptor 2 (for example, a plasma display)
3. Connect the 12V DC power adapter to the power socket and connect the adapter to the mains electricity.
4. Press the EDID SETUP button to acquire or change the EDID information (see section 5.2).

---

<sup>1</sup> Switch OFF the power on each device before connecting it to your VM-2HDMI. After connecting your VM-2HDMI, switch on its power and then switch on the power on each device

<sup>2</sup> If you are using only one HDMI acceptor, you should connect it to OUT 1



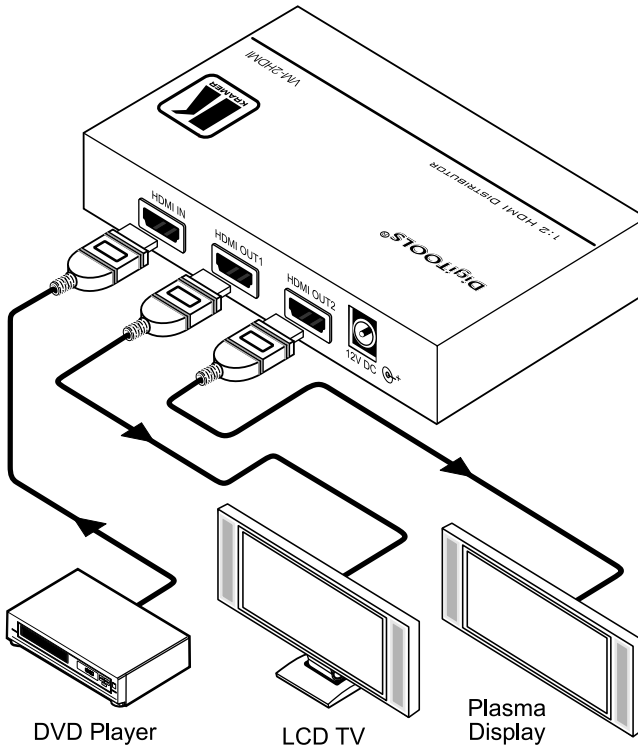


Figure 3: Connecting a VM-2HDMI 1:2 HDMI Distributor

## 5.2 Using the VM-2HDMI EDID SETUP Button

Initially, the **VM-2HDMI** operates with the factory default EDID<sup>1</sup>. This lets you connect the power before connecting either of the acceptors or the source.

You can acquire the EDID From:

- The Default EDID (both output LEDs blink)
- One Output (the relevant output illuminates)

You can also acquire the Clone EDID which copies the EDID data from the acceptor bit-by-bit.

---

<sup>1</sup> The VM-2HDMI reads the EDID, which is stored in the non-volatile memory

### 5.2.1 Acquiring / Changing the EDID

You can work with the default EDID or acquire or change an EDID via one of the connected outputs. Use the EDID Setup button to acquire the output EDID information.

To acquire or change the EDID of a new output display:

1. Connect the power supply.  
The ON LED lights.
2. Connect the new output display device.
3. Press and hold the EDID SETUP button for more than three seconds and release.  
The INPUT LED blinks and the OUT2 LED and OUT1 LED blink alternately.
4. Press the EDID SETUP button again when the appropriate OUT LED lights, that is to copy the EDID from the display connected to the HDMI:
  - OUT1 connector, press the EDID button when the OUT1 LED is on
  - OUT2 connector, press the EDID button when the OUT2 LED is on

In either case, the **VM-2HDMI** copies the EDID from the display. If no display is connected to the selected HDMI output, the default EDID will be chosen.

Note that during the EDID setup, the respective OUT LED blinks. When that output is connected, that OUT LED illuminates

### 5.2.2 Acquiring the Clone EDID

To acquire the Clone EDID, do the following<sup>1</sup>:

1. Connect the new output display device (for example, to OUT 1).
2. Disconnect the power supply.
3. Reconnect the power supply while pressing the EDID SETUP button.  
The ON LED lights and the OUT 1 and OUT 2 blink alternately.
4. Release the EDID SETUP button when the OUT 1 LED blinks.  
The Clone EDID is stored in the non-volatile memory when the OUT 1 LED ceases to blink.

---

<sup>1</sup> This example refers to OUT 1. The same applies for OUT 2 if the acceptor is connected to OUT 2

## 6 Technical Specifications

Table 2 includes the technical specifications<sup>1</sup> of the **VM-2HDMI**:

*Table 2: Technical Specifications of the VM-2HDMI*

INPUT:	HDMI Connector
OUTPUTS:	2 HDMI Connectors
BANDWIDTH:	Supports up to 1.65Gbps bandwidth per graphic channel
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI 1.1 and HDCP
CONTROLS:	EDID SETUP button
INDICATOR LEDs:	INPUT, OUT1, OUT2, and POWER LEDs
POWER SOURCE:	12 VDC 400mA
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" 0.98", W, D, H)
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply, bracket installation kit
OPTIONS:	HDMI/HDMI male-to-male cables

<sup>1</sup> Specifications are subject to change without notice

---

## LIMITED WARRANTY

Kramer Electronics (hereafter *Kramer*) warrants this product free from defects in material and workmanship under the following terms.

### HOW LONG IS THE WARRANTY

Labor and parts are warranted for seven years from the date of the first customer purchase.

### WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

### WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed by Kramer, or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site [www.kramerelectronics.com](http://www.kramerelectronics.com).
2. Any product, on which the serial number has been defaced, modified or removed, or on which the WARRANTY VOID IF TAMPERED sticker has been torn, reattached, removed or otherwise interfered with.
3. Damage, deterioration or malfunction resulting from:
  - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
  - ii) Product modification, or failure to follow instructions supplied with the product
  - iii) Repair or attempted repair by anyone not authorized by Kramer
  - iv) Any shipment of the product (claims must be presented to the carrier)
  - v) Removal or installation of the product
  - vi) Any other cause, which does not relate to a product defect
  - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

### WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

1. Removal or installations charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
3. Shipping charges.

### HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on you product, you must take or ship it prepaid to any authorized Kramer service center.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

### LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

### EXCLUSION OF DAMAGES

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall not be liable for:

1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

**NOTE:** All products returned to Kramer for service must have prior approval. This may be obtained from your dealer.

This equipment has been tested to determine compliance with the requirements of:

- |           |   |
|-----------|---|
| EN-50081: | "Electromagnetic compatibility (EMC);<br>generic emission standard.<br>Part 1: Residential, commercial and light industry"          |
| EN-50082: | "Electromagnetic compatibility (EMC) generic immunity standard.<br>Part 1: Residential, commercial and light industry environment". |
| CFR-47:   | FCC* Rules and Regulations:<br>Part 15: "Radio frequency devices<br>Subpart B Unintentional radiators"                              |

### CAUTION!

- ☒ Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the equipment.
- ☒ Use the supplied DC power supply to feed power to the machine.
- ☒ Please use recommended interconnection cables to connect the machine to other components.

\* FCC and CE approved using STP cable (for twisted pair products)



---

**For the latest information on our products and a list of Kramer distributors, visit our Web site: [www.kramerelectronics.com](http://www.kramerelectronics.com), where updates to this user manual may be found. We welcome your questions, comments and feedback.**



**Caution**

**Safety Warning:**

Disconnect the unit from the power supply before opening/servicing.



---

**Kramer Electronics, Ltd.**

Web site: [www.kramerelectronics.com](http://www.kramerelectronics.com)

E-mail: [info@kramerel.com](mailto:info@kramerel.com)

P/N: 2900-000153 REV 5