


# Lightolier


45 INDUSTRIAL WAY, WILMINGTON, MA 01887

## INSTALLATION INSTRUCTIONS FOR LYTECEL (Both LI and LC)

- 1 ACCESS PLATE**  
Remove Access Plate by sliding Access Plate in the direction of Arrow 1. To remove, lift up and slide in the direction of Arrow 2. Bend Fixture Tab up out of body and make ground and ballast connections. Bend Fixture Tab back to original position. Replace Access Plate by reversing removal instructions.


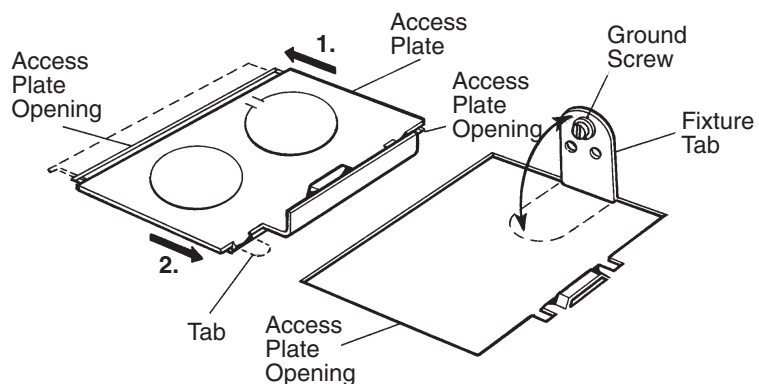


- 2 INSTALL FIXTURES** onto T-bars as shown.

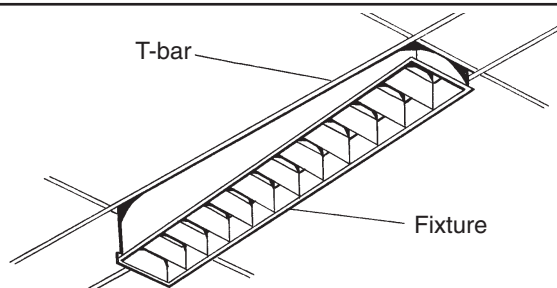


- 3 CONTINUOUS ROW COUPLER (LC UNITS ONLY)** Remove screw as shown. Rotate Continuous Row Coupler (both sides of

Fixtures) and secure Fixtures together with Screw. Tighten all Screws to secure Fixtures to T-bar with Hold-down Clips.

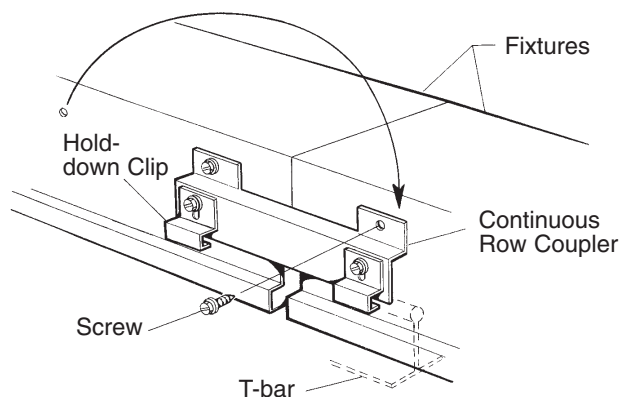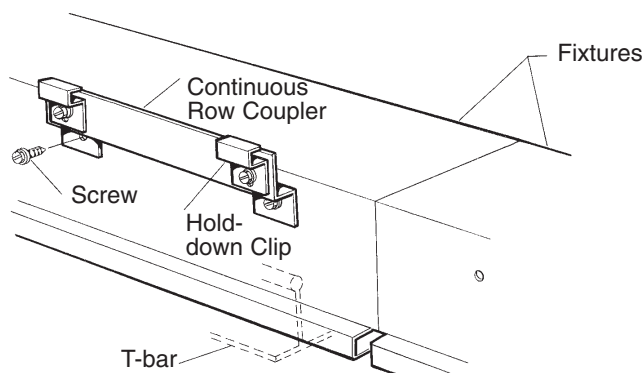

- 4 HOLD-DOWN CLIPS (LI UNITS ONLY)** Install Hold-down Clips at beginning and end of rows.

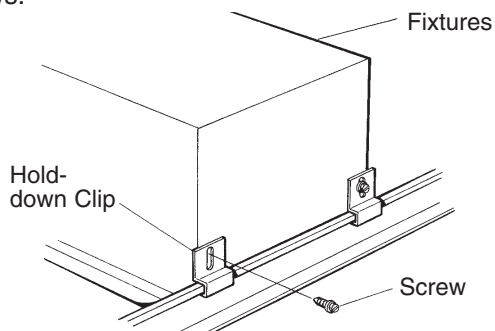

- 5** To open Louver, press Spring Latch in direction of Arrow. To close, insert louver into Fixture until Spring Latches automatically engage.

