

Ordering Information

Catalog No.	Finish	Mounting	Lamps	Reflectors
23S39T6AL	Aluminum	For use with Lytespan Radius, Basic and Advent Track.	39W T6 G12 Base	MHT6RS, MHT6RNF, MHT6RF
23S39T6BK	Black	Not compatible with extension wands or slope ceiling adapters. For monopoint applications refer to spec sheet 6172.	Ceramic Metal Halide	MHT6RSCCZ, MHT6RNFCCZ,
23S39T6WH	White			MHT6RFCCZ REFLECTORS SOLD SEPARATELY

Features

- Track Attachment Fitting:** Locking lever for mechanical/ electrical connection.
- Brass Contact:** Extends for connection to second circuit (Advent track only).
- Horizontal Pivot:** Wireless stem profile with 365° horizontal rotation. Position may be locked using an allen key.
- Vertical Pivot:** 0-90° vertical adjustment with aiming indicator. **Position may be locked using an allen key.**
- Fixture Housing:** Die cast aluminum
- Ballast Housing:** Molded polycarbonate
- Safety Lens:** Tempered 1/8" glass. Meets or exceeds UL safety requirement for metal halide lamps.
- On/Off Switch:** Rocker switch to disconnect power to the ballast.
- Accessory Cartridge:** Hinged and captive; retaining ring included. Inside painted black to reduce glare.
- Safety Locking Lever:** Locks ballast housing to track.

Finish

All Painted finishes are baked enamel.

Accessories

Accessory Holder: Integral

Accessories: Accepts 1 snoot plus 2 lenses or 1 louver plus 1 lens.

When using 2 accessories, remove safety lens provided.

Lens: AF4, ADF4 Series

Louver: AL4HC

Reflector

Interchangeable reflectors available to allow for desired beam spread.
REFLECTORS SOLD SEPARATELY.

Electrical

Electronic Ballast

Input Voltage: 120V, 50/60Hz

Power Factor: 0.9

Input Power: 45W

Max. Input Current: 0.40A

ANSI Code: M130

Do not use on dimming circuit.

Labels

UL, cUL

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

www.lightolier.com © 2008 Philips Group • D0908


Aiming Angle:

L Beam length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

CBCP = Center Beam Candle Power.

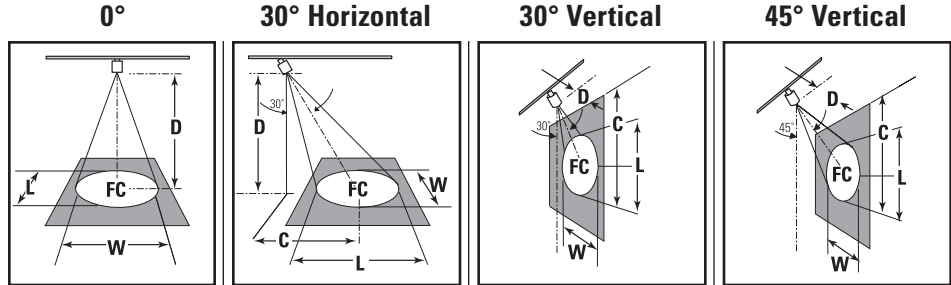

Lamp	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
23S39T6-MHT6RS		17065	12000	10'	171	2.5'	2.5'	10'	5.8'	111	3.3'	2.8'	4'	6.9'	133	4.1'	2.0'	5'	5.0'	241	2.5'	1.7'
				12'	119	2.9'	2.9'	12'	6.9'	77	3.9'	3.4'	5'	8.7'	85	5.1'	2.5'	6'	6.0'	168	3.0'	2.1'
				14'	87	3.4'	3.4'	14'	8.1'	57	4.6'	4.0'	6'	10.4'	59	6.2'	2.9'	7'	7.0'	123	3.5'	2.4'
				16'	67	3.9'	3.9'	16'	9.2'	43	5.3'	4.5'	7'	12.1'	44	7.2'	3.4'	8'	8.0'	94	4.0'	2.8'
23S39T6-MHT6RNF		9912	12000	8'	155	2.8'	2.8'	8'	4.6'	101	3.8'	3.3'	3'	5.2'	138	4.7'	2.1'	4'	4.0'	219	2.9'	2.0'
				10'	99	3.5'	3.5'	10'	5.8'	64	4.8'	4.1'	4'	6.9'	77	6.2'	2.8'	5'	5.0'	140	3.6'	2.5'
				12'	69	4.2'	4.2'	12'	6.9'	45	5.7'	4.9'	5'	8.7'	50	7.8'	3.5'	6'	6.0'	97	4.4'	3.0'
				14'	51	4.9'	4.9'	14'	8.1'	33	6.7'	5.7'	6'	10.4'	34	9.3'	4.2'	7'	7.0'	72	5.1'	3.5'
23S39T6-MHT6RF		4447	12000	6'	124	3.1'	3.1'	6'	3.5'	80	4.2'	3.6'	2'	3.5'	139	5.2'	2.1'	3'	3.0'	175	3.3'	2.2'
				8'	69	4.1'	4.1'	8'	4.6'	45	5.6'	4.8'	3'	5.2'	62	7.8'	3.1'	4'	4.0'	98	4.4'	2.9'
				10'	44	5.2'	5.2'	10'	5.8'	29	7.1'	6.0'	4'	6.9'	35	10.4'	4.1'	5'	5.0'	63	5.5'	3.7'
				12'	31	6.2'	6.2'	12'	6.9'	20	8.5'	7.2'	5'	8.7'	22	12.9'	5.2'	6'	6.0'	44	6.7'	4.4'

Note: For Champagne Bronze (CCZ), multiply FC values by 0.64. CCZ Champagne Bronze reflector "warms" the beam to 2700K.

Job Information Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • D0908