

Computer Specifications

CPU and Memory

32-bit CPU Upgradable 486-class processors

Green PC energy saver Energy Star compliant, low-power standby, doze and suspend modes for the CPU, hard disk drive, and video signals sent by the computer to the monitor; select time-out periods in SETUP; in a standard configuration of one hard disk drive and one diskette drive, system consumes less than 30 Watts in standby mode

System speed Fast and slow processor speeds available; fast is the speed of the processor and slow is 8 MHz; from MS-DOS applications, speed selectable by keyboard command

Memory 4 or 8MB RAM standard using SIMMs; expandable to 128MB using 1, 2, 4, 8, 16, and 32MB SIMMs; SIMMs must be tin-plated, 72-pin, 32-bit, fast-page mode type with access speed of 70ns or faster

ROM 128KB Phoenix system BIOS, video BIOS, and SETUP code located in Flash ROM on main system board

Video RAM 1MB DRAM on main system board; expandable to 2MB using two 512KB, 40-pin, SOJ flat pack video DRAM chips

Shadow RAM Supports shadowing of system and video BIOS ROM into RAM; video shadowing selectable in SETUP program

Cache 8KB of internal cache in the processor; supports 128, 256, or 512KB of external cache with 32K x 8, 64K x 8, or 128K x 8, 15ns or 20ns SRAM DIP chips and a 32K x 8 tag chip

Math coprocessor Math coprocessor built into the processor on all DX and Intel® Pentium™ OverDrive™ processors

Clock/calendar Real-time clock, calendar, and CMOS RAM socketed on main system board with integrated lithium battery

Controllers

PCI Chipset Provides PCI caching, memory and control for the PCI bus, and the two-channel PCI IDE interface; integrated PCI bridge translates CPU bus cycles to PCI bus cycles and CPU-to-PCI memory write cycles to PCI burst cycles

Video Cirrus Logic GD5430 high-performance GUI accelerator controller supports resolutions up to 1024 x 768 in 256 colors with 1MB of video DRAM; 1280 x 1024 with 2MB of video DRAM

Diskette Controller on main system board supports up to two diskette drives or one diskette/ combo diskette and one tape drive

Hard disk Two PCI, ATA-2 compatible two-channel, local bus IDE interfaces on main system board support up to four IDE devices (two on each channel); CD-ROM drives cannot be connected to the same channel as hard disk drives; BIOS provides hard disk auto-sensing and enhanced IDE functions

Interfaces

Monitor Energy Star compliant video interface for fixed or multi-frequency monitor built into system board; 15-pin, D-shell connector

Parallel One standard, multimode parallel interface built into main system board; supports S-bit unidirectional, 16-bit bidirectional, and EPP/ ECP (Enhanced Parallel Port/Extended Capability Port) modes; 25-pin, D-shell connector; operation controllable by SETUP program and jumpers

Serial Two high-speed RS-232C, programmable, asynchronous interfaces built into main system board; 16C550-compatible; 9-pin, D-shell connectors

Keyboard PS/2™ compatible keyboard interface built into main system board; 6-pin, mini DIN connector

Mouse PS/2 compatible mouse interface built into main system board; 6-pin, mini DIN connector

Option slots Connector card with five I/O expansion slots; three ISA compatible (8.33 MHz bus speed), two PCI compatible (33 MHz bus speed)

Speaker Internal

Mass Storage

Slimline

Internal mount:

One 3½-inch wide, one-inch high drive

Externally accessible mounts:

One 3½-inch wide, one-inch high drive and two 5¼-inch wide, half-height drives

Tower

Front internal mount:

One 3½-inch wide, one-inch high drive

Rear internal mounts:

Two 3½-inch wide, one-inch high drives or one 3½-inch wide, full-height drive

Externally accessible mounts:

Two 3½-inch wide, one-inch high drives and two 5¼-inch wide, half-height drives

Diskette drive types 3½-inch diskette drive, 720KE or 1.44ME storage capacity; 5¼-inch diskette drive, 360KB or 1.2MB storage capacity; or combination 3½-inch/5¼-inch or 3½-inch/PCMCIA diskette drive

Hard disk drive types 5¼-inch or 3½-inch form factor hard disk drive(s), up to half-height size; maximum of four drives

Other devices Half-height tape drive, CD-ROM drive, optical drive, PCMCIA card reader, or other storage device; 5¼-inch, or 3½-inch with mounting frames

Keyboard

Detachable, two-position height; 101 or 102 sculpted keys; country-dependent main typewriter keyboard; numeric/cursor control keypad; four-key cursor control keypad; 12 function keys

Mouse

Detachable, two-button, PS/2 compatible

SETUP Program

Stored in ROM; accessible by pressing Del during boot

System security User and Supervisor level passwords available for system boot or diskette access

Virus protection Write protection feature for the hard disk drive boot sector

Physical Characteristics

| Dimension | Slimline | Tower |
|-----------|--|--|
| Width | 16.8 inches (427 mm) | 7.1 inches (181 mm) |
| Depth | 15.8 inches (401 mm) | 16.2 inches (413 mm) |
| Height | 4.4 inches (112 mm) | 13.2 inches (337 mm) |
| Weight | 18.2 lb (8.3 kg) with one diskette drive, without keyboard | 20.6 lb (9.3 kg) with one diskette drive, without keyboard |

Power Supply

| | |
|----------------|--|
| Type | 200 Watt, UL/TUV/CSA listed, fan-cooled |
| Input ranges | 100-120 VAC or 200-240 VAC; switch-selectable |
| Maximum output | +5 VDC at 20 Amps, -5 VDC at 0.5 Amp +12 VDC at 8 Amps, -12 VDC at 0.5 Amp |
| Frequency | 50 to 60 Hz |
| Cables | Two to main system board, five to mass storage devices; for more than five devices, Y cables can be installed on the existing cables |

Option slot power limits

| Output voltage (VDC) | +5 Volts | -5 Volts | +12 Volts | -12 Volts |
|----------------------|----------|----------|-----------|-----------|
| For all slots | 12 Amps | 0.4 Amp | 4.0 Amps | 0.4 Amp |

Environmental Requirements

| Condition | Operating range | Storage range |
|------------------------------|---------------------------------------|---|
| Temperature | 41° to 90° F (5° to 32° C) | -4° to 140° F (-20° to 60° C) |
| Humidity (non-condensing) | 20% to 90% | 10% to 90% |
| Altitude | -330 to 9,900 ft (-100 to 3,000 m) | -330 to 39,600 ft (-100 to 12,000 m) |

Jumper Settings

Miscellaneous jumper settings

| Jumper number | Jumper setting | Function |
|---------------|--------------------|--|
| JP2 | 1-2 * 2-3 | Enables on-board I/O controller Disables on-board I/O controller |
| JP11 | 1-2 2-3* Off | Selects 5V flash ROM Selects 12V flash ROM EPROM |
| JP25 | Off* On | Enables PCI IDE controller Disables PCI IDE controller |
| JP49 | On Off* | Clears CMOS memory (resets SETUP values to factory defaults) Normal CMOS values |
| JP50 | 1-2 * 2-3 | Enables on-board VGA controller Disables on-board VGA controller |

* Default setting

Parallel port ECP mode DRQ jumper settings

| Function | JP8 | JP18 |
|---------------|-----|------|
| DRQ1 (DACK1)* | 1-2 | 2-3 |
| DRQ4 (DACK3) | 2-3 | 1-2 |

* Default setting

CPU type jumper settings

| Jumper number | CPU type | | | | | | | |
|---------------|-------------------|-------|-------------|----------------|---------------------|---------------------|-------------|-----------------|
| | Intel or AMD | Intel | | | | | Cyrix | |
| | 486 DX/DX2 or DX4 | 486SX | P24T | 486 SXSL/SX2SL | 486DXSL/DX2SL/DX4SL | 486DX2 (P24D L1-WB) | 486S (M6) | 486 DX/DX2 (M7) |
| JP19 | | | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 |
| JP22 | 1-2 | 1-2 | 2-3 | 2-3 | 2-3 | 2-3 | 2-3 | 2-3 |
| JP23 | | | 1-2 | | | | 2-3 | 2-3 |
| JP28 | | | On | | | | | |
| JP29 | | | On | | | | | |
| JP33 | | | 2-3, 4-5 | 2-3, 4-5 | 2-3, 4-5 | 2-3, 4-5 | 1-2, 3-4 | 1-2, 3-4 |
| JP34 | | | 1-2 | 1-2 | 1-2 | 1-2, 3-4 | 2-3 | 2-3 |
| JP36 | 1-2, 3-4 | 2-3 | 1-2, 3-4 | 2-3 | 1-2, 3-4 | 1-2, 3-4 | 2-3 | 1-2, 3-4 |
| JP37 | | | 2-3 | | | | 1-2 | 2-3 |
| JP38 | | | | | | On | | |
| JP39 | 1-2 | | 2-3 | | 1-2 | 1-2 | | 1-2 |
| JP40 | | | | | | | 2-3 | 2-3 |
| JP44 | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 | 2-3 | 2-3 |
| JP45 | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 | 1-2 |

CPU voltage jumper settings

| CPU voltage | JP1 (on voltage regulator) * |
|-------------|--|
| 3.3V | 1-2 |
| 3.45V | 3-4 |
| 3.6V | 5-6 |
| 4.0V | 7-8 |
| 5.0V | Remove voltage regulator and jumper all pins in socket |

* Default setting depends on installed processor

Cache jumper settings

| Cache configuration | JP41 | JP42 | JP43 | JP46 | JP47 | JP48 |
|--------------------------------------|------|------|------|------|------|------|
| 128KB (32K × 8 SRAMs in Bank 0) | Off | 2-3 | 1-2 | Off | Off | Off |
| 256KB (32K × 8 SRAMs in Banks 0 & 1) | Off | 1-2 | 2-3 | On | Off | Off |
| 512KB (64K × 8 SRAMs in Banks 0 & 1) | Off | 1-2 | 2-3 | On | On | Off |
| 512KB (128K × 8 SRAMs in Bank 0) | 1-2 | 2-3 | 2-3 | On | On | Off |


CPU clock jumper settings

| CPU clock speed | JP6 * |
|-----------------|---------------|
| 25 MHz | 1-2 |
| 33 MHz | 1-2, 3-4, 5-6 |
| 40 MHz | 1-2, 3-4 |
| 50 MHz | 5-6 |

* Default setting depends on installed processor

System Board Components

The diagram below illustrates the components on the ActionPC 7000/ActionTower 7000/Endeavor 486i board. The table following it describes these components.

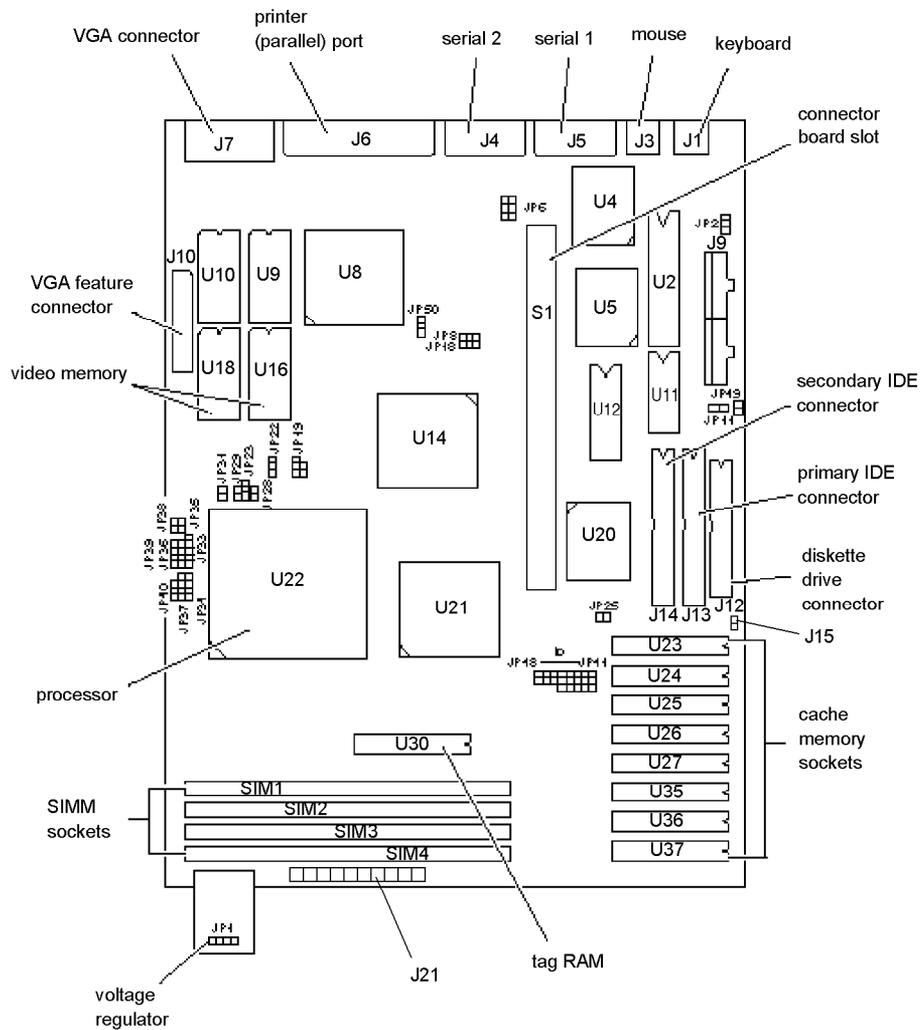

System board components

| Connector | |
|-------------------|--|
| J1 | PS/2 keyboard connector |
| J3 | PS/2 mouse connector |
| J4 | Serial 2 port connector |
| J5 | Serial 1 port connector |
| J6 | Printer (parallel) port connector |
| J7 | 15-pin DIN type VGA connector |
| J9 | Power connector |
| J10 | VGA feature connector |
| J12 | Diskette drive connector |
| J13 | Primary IDE connector |
| J14 | Secondary IDE connector |
| J15 | HDD LED connector |
| J21 | Pins 2-3: Turbo LED connector Pins 9-10: Hardware reset connector Pins 11-13: Power LED connector Pins 17-20: Speaker connector |
| S1 | Riser card slot; default settings of PCI AD Select are AD12 and AD13 |
| U2 | AMIKEY-2 keyboard controller |
| U4, U14, U20, U21 | UMC UM82C865, UMC UM8886, CMD PCI0640B, UMC UM8881 PCI chipset |
| U5 | SMC FDC 37C665 parallel port super I/O diskette controller |
| U8 | Cirrus Logic GD5430 VGA controller |
| U9, U10 | Soldered standard Video RAM |
| U11 | Dallas DS 12887 real-time clock chip |
| U12 | Phoenix system and video BIOS chip |
| U16, U18 | Video DRAM expansion sockets |
| U22 | CPU |
| U23-27, U35-37 | External cache memory sockets |
| U30 | Cache tag RAM chip |

SIMM configurations

| Bank 0 (SIM1) | Type | Bank 1 (SIM2) | Type | Bank 2 (SIM3) | Type | Bank 3 (SIM4) | Type | Total memory |
|---------------|--------|---------------|--------|---------------|--------|---------------|--------|--------------|
| 1MB | Single | 1MB | Single | — | — | — | — | 2MB |
| 1MB | Single | 1MB | Single | 1MB | Single | 1MB | Single | 4MB |
| 1MB | Single | 1MB | Single | 2MB | Double | — | — | 4MB |
| 1MB | Single | 1MB | Single | 2MB | Double | 2MB | Double | 6MB |
| 1MB | Single | 1MB | Single | 4MB | Single | — | — | 6MB |
| 1MB | Single | 1MB | Single | 4MB | Single | 4MB | Single | 10MB |
| 1MB | Single | 1MB | Single | 8MB | Double | — | — | 10MB |
| 1MB | Single | 1MB | Single | 8MB | Double | 8MB | Double | 18MB |
| 1MB | Single | 1MB | Single | 16MB | Single | — | — | 18MB |
| 1MB | Single | 1MB | Single | 16MB | Single | 16MB | Single | 34MB |
| 1MB | Single | 1MB | Single | 32MB | Double | — | — | 34MB |
| 1MB | Single | 1MB | Single | 32MB | Double | 32MB | Double | 66MB |
| 2MB | Double | — | — | — | — | — | — | 2MB |
| 2MB | Double | — | — | 2MB | Double | — | — | 4MB |
| 2MB | Double | 2MB | Double | — | — | — | — | 4MB |
| 2MB | Double | 2MB | Double | 2MB | Double | — | — | 6MB |
| 2MB | Double | 2MB | Double | 1MB | Single | 1MB | Single | 6MB |
| 2MB | Double | 2MB | Double | 2MB | Double | 2MB | Double | 8MB |
| 2MB | Double | 2MB | Double | 4MB | Single | — | — | 8MB |
| 2MB | Double | 2MB | Double | 4MB | Single | 4MB | Single | 12MB |
| 2MB | Double | 2MB | Double | 8MB | Double | — | — | 12MB |
| 2MB | Double | 2MB | Double | 8MB | Double | 8MB | Double | 20MB |
| 2MB | Double | 2MB | Double | 16MB | Single | — | — | 20MB |
| 2MB | Double | 2MB | Double | 16MB | Single | 16MB | Single | 36MB |
| 2MB | Double | 2MB | Double | 32MB | Double | — | — | 36MB |
| 2MB | Double | 2MB | Double | 32MB | Double | 32MB | Double | 66MB |
| 4MB | Single | — | — | — | — | — | — | 4MB |
| 4MB | Single | — | — | 4MB | Single | — | — | 8MB |
| 4MB | Single | 4MB | Single | — | — | — | — | 8MB |
| 4MB | Single | 4MB | Single | 1MB | Single | 1MB | Single | 10MB |
| 4MB | Single | 4MB | Single | 2MB | Double | — | — | 10MB |
| 4MB | Single | 4MB | Single | 4MB | Single | — | — | 12MB |
| 4MB | Single | 4MB | Single | 2MB | Double | 2MB | Double | 12MB |
| 4MB | Single | 4MB | Single | 4MB | Single | 4MB | Single | 16MB |
| 4MB | Single | 4MB | Single | 8MB | Double | — | — | 16MB |
| 4MB | Single | 4MB | Single | 8MB | Double | 8MB | Double | 24MB |
| 4MB | Single | 4MB | Single | 16MB | Single | — | — | 24MB |
| 4MB | Single | 4MB | Single | 16MB | Single | 16MB | Single | 40MB |
| 4MB | Single | 4MB | Single | 32MB | Double | — | — | 40MB |
| 4MB | Single | 4MB | Single | 32MB | Double | 32MB | Double | 72MB |
| 8MB | Double | — | — | — | — | — | — | 8MB |
| 8MB | Double | — | — | 8MB | Double | — | — | 16MB |
| 8MB | Double | 8MB | Double | — | — | — | — | 16MB |
| 8MB | Double | 8MB | Double | 1MB | Single | 1MB | Single | 18MB |
| 8MB | Double | 8MB | Double | 2MB | Double | — | — | 18MB |
| 8MB | Double | 8MB | Double | 2MB | Double | 2MB | Double | 20MB |
| 8MB | Double | 8MB | Double | 4MB | Single | — | — | 20MB |
| 8MB | Double | 8MB | Double | 8MB | Double | — | — | 24MB |
| 8MB | Double | 8MB | Double | 4MB | Single | 4MB | Single | 24MB |
| 8MB | Double | 8MB | Double | 8MB | Double | 8MB | Double | 32MB |
| 8MB | Double | 8MB | Double | 16MB | Single | — | — | 32MB |
| 8MB | Double | 8MB | Double | 16MB | Single | 16MB | Single | 48MB |
| 8MB | Double | 8MB | Double | 32MB | Double | — | — | 48MB |
| 8MB | Double | 8MB | Double | 32MB | Double | 32MB | Double | 80MB |
| 16MB | Single | — | — | — | — | — | — | 16MB |
| 16MB | Single | — | — | 16MB | Single | — | — | 32MB |
| 16MB | Single | 16MB | Single | — | — | — | — | 32MB |
| 16MB | Single | 16MB | Single | 1MB | Single | 1MB | Single | 34MB |
| 16MB | Single | 16MB | Single | 2MB | Double | — | — | 34MB |
| 16MB | Single | 16MB | Single | 2MB | Double | 2MB | Double | 36MB |
| 16MB | Single | 16MB | Single | 4MB | Single | — | — | 36MB |
| 16MB | Single | 16MB | Single | 4MB | Single | 4MB | Single | 40MB |

SIMM Installation

The computer comes with 4 or 8MB of memory using SIMMs. By installing additional SIMMs, you can increase the amount of memory up to 128MB.

There are four SIMM sockets on the main system board, and each can contain one memory module. You can install 1MB, 2MB, 4MB, 8MB, 16MB, and 32MB SIMMs. The sockets are labeled on the main system board.

The following table shows the recommended SIMM configurations. Do not install SIMMs in any other configuration.

SIMM configurations (continued)

| Bank0 (SIM1) | Type | Bank1 (SIM2) | Type | Bank2 (SIM3) | Type | Bank3 (SIM4) | Type | Total memory |
|--------------|--------|--------------|--------|--------------|--------|--------------|--------|--------------|
| 16MB | Single | 16MB | Single | 8MB | Double | - | - | 40MB |
| 16MB | Single | 16MB | Single | 16MB | Single | - | - | 48MB |
| 16MB | Single | 16MB | Single | 8MB | Double | 8MB | Double | 48MB |
| 16MB | Single | 16MB | Single | 16MB | Single | 16MB | Single | 64MB |
| 16MB | Single | 16MB | Single | 32MB | Double | - | - | 64MB |
| 16MB | Single | 16MB | Single | 32MB | Double | 32MB | Double | 96MB |
| 32MB | Double | - | - | - | - | - | - | 32MB |
| 32MB | Double | - | - | 32MB | Double | - | - | 64MB |
| 32MB | Double | 32MB | Double | - | - | - | - | 64MB |
| 32MB | Double | 32MB | Double | 1MB | Single | 1MB | Single | 66MB |
| 32MB | Double | 32MB | Double | 2MB | Double | - | - | 66MB |
| 32MB | Double | 32MB | Double | 2MB | Double | 2MB | Double | 68MB |
| 32MB | Double | 32MB | Double | 4MB | Single | - | - | 68MB |
| 32MB | Double | 32MB | Double | 4MB | Single | 4MB | Single | 72MB |
| 32MB | Double | 32MB | Double | 8MB | Double | - | - | 72MB |
| 32MB | Double | 32MB | Double | 8MB | Double | 8MB | Double | 80MB |
| 32MB | Double | 32MB | Double | 16MB | Single | - | - | 80MB |
| 32MB | Double | 32MB | Double | 16MB | Single | 16MB | Single | 96MB |
| 32MB | Double | 32MB | Double | 32MB | Double | - | - | 96MB |
| 32MB | Double | 32MB | Double | 32MB | Double | 32MB | Double | 128MB |

* If you install SIMMs in both Bank 0 and Bank 1 or Bank 2 and Bank 3, SIMM types must match.

Use only tin-plated, 32-bit, 72-pin, fast-page mode SIMMs that operate at an access speed of 80ns or faster. Be sure all the SIMMs operate at the same speed.

Video Memory

The computer comes with 1MB of video memory. You can increase the video memory to 2MB by installing two 512KB, 40-pin SOJ flat pack video DRAM chips. (You cannot increase video memory by installing just one chip.)

Video resolutions and colors

| Resolution | Memory requirements | Color | Refresh rates (Hz) | Remarks |
|-------------|---------------------|--------------------|--------------------|-----------------|
| 640 x 480 | 1MB | 256 | 60/72/75 | 8 bits/pixel |
| | 1MB | 32K/64K | 60/72/75 | 16 bits/pixel |
| | 1MB | 16.8M (True Color) | 60 | 24 bits/pixel |
| 800 x 600 | 1MB | 256 | 60/72/75 | 8 bits/pixel |
| | 1MB | 32K/64K | 60/72/75 | 16 bits/pixel |
| | 2MB | 32K/64K | 60/72/75 | 16 bits/pixel |
| 1024 x 768 | 1MB | 256 | 43.5/60/70/75 | 8 bits/pixel* |
| | 2MB | 32K | 43.5/60/70/75 | 16 bits/pixel* |
| | 2MB | 64K | 43.5 | 16 bits/pixel** |
| 1280 x 1024 | 1MB | 16 | 43.5 | 4 bit planes** |
| | 2MB | 256 | 43.5/60 | 8 bits/pixel* |

* Non-interlaced and interlaced

** Interlaced

External Cache

You can install 128KB, 256KB, or 512KB of external cache with 32K x 8, 64K x 8, or 128K x 8 15ns or 20ns, SRAM DIP chips and one 32K x 8 15ns or 20ns tag chip. The computer may already have cache installed.

You must install cache in one of the configurations in the table below (each bank contains four cache memory sockets).

Cache memory configurations

| BANK 0 U23, 24, 25, 26 | BANK 1 U27, 35, 36, 37 | Tag SRAM U30 | Total cache |
|---------------------------|---------------------------|-----------------|-------------|
| 32K x 8, 28-pin | None | 32K x 8, 28-pin | 128KB |
| 32K x 8, 28-pin | 32K x 8, 28-pin | 32K x 8, 28-pin | 256KB |
| 64K x 8, 28-pin | 64K x 8, 28-pin | 32K x 8, 28-pin | 512KB |
| 128K x 8, 32-pin | None | 32K x 8, 28-pin | 512KB |

Processor Upgrades

The computer's processor can be upgraded by replacing the existing processor with a faster one. The following table lists supported processors and voltages.

Supported processors

| Processor | Voltage | Processor | Voltage |
|--------------|----------|-----------------|---------|
| AMD DX/4 100 | 3.45 | Cyrix DX 50 | 3.3/5.0 |
| AMD DX/2 66 | 3.45 | Intel DX4/100 | 3.45 |
| AMD DX/2 80 | 3.45 | Intel DX4/75 | 3.3 |
| Cyrix DX2/80 | 4.0 | Intel DX2/50/66 | 5.0 |
| Cyrix DX2/66 | 3.45/3.6 | Intel DX, SX | 5.0 |

Hard Disk Drive Types

Your computer comes with a hard disk auto-sensing feature. To use it, select one of the drives you have installed from the Fixed Disk Setup screen. On the screen that appears for that drive, press Enter to select the **Autotype Fixed Disk** option. The system detects the type of hard disk drive, fills in the drive's parameters, and sets the remaining options on the screen.

Hard Disk Drive Information

The following table lists parameters for hard disk drives qualified for use in the computer.

Hard disk the parameters

| Parameters | Conner® | | | | | | Western Digital® | | | |
|---------------------------|----------|----------|----------|----------|----------|----------|------------------|---------|---------|---------|
| | CFS1275A | CFS850A | CFS540A | CFS425A | CFS420A | CFS270A | AC2540 | AC2420 | AC2340 | AC2250 |
| Formatted capacity (MB) | 1275 | 850 | 540 | 425 | 420 | 270 | 540 | 425 | 341 | 256 |
| Size, width × height (in) | 4 × 1 | 4 × 1 | 4 × 1 | 4 × 1 | 4 × 1 | 4 × 1 | 4 × 1 | 4 × 1 | 4 × 1 | 4 × 1 |
| Weight (lb) | 1.25 | 1.25 | 1.2 | 1.1 | 1.16 | 1.1 | 1.2 | 1.12 | 1.12 | 1.12 |
| Cylinders | 3687 | 3687 | 2805 | 839 | 2388 | 525 | 1048 | 2720 | 2233 | 2233 |
| Disks | 3 | 2 | 2 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| Heads | 6 | 4 | 4 | 2 | 4 | 2 | 4 | 4 | 4 | 3 |
| Sectors per track | 78 - 144 | 78 - 144 | 79 - 119 | 78 - 144 | 63 - 100 | 72 - 117 | 63 | 55 - 99 | 56 - 96 | 56 - 96 |
| Rotational speed (RPM) | 3600 | 3600 | 3600 | 3600 | 3600 | 3400 | 4500 | 3314 | 3322 | 3322 |
| Buffer size (KB) | 64 | 64 | 64 | 64 | 32 | 32 | 128 | 128 | 128 | 64 |
| Average seek time (ms) | <15 | <15 | 14 | 14 | 14 | 14 | 11 | <13 | <13 | <13 |
| Encoding method | RLL 1,7 | RLL 1,7 | RLL 1,7 | RLL 1,7 |
| Power dissipation (seek) | 5.6 W | 5.6 W | 4.3 W | 3.9 W | 5-12 W | 3.9 W | 7.0 W | 5.2 W | 5.2 W | 5.2 W |
| Logical parameters | | | | | | | | | | |
| Cylinders | 2479 | 1652 | 1050 | 826 | 826 | 525 | 1048 | 989 | 1010 | 1010 |
| Heads | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 15 | 12 | 9 |
| Precomp zone | 0 | 0 | 0 | 0 | 0 | 0 | 1048 | 989 | 1011 | 1011 |
| Landing zone | 2479 | 1652 | 1050 | 826 | 826 | 525 | 1048 | 989 | 1011 | 1011 |
| Sectors | 63 | 63 | 63 | 63 | 63 | 63 | 63 | 56 | 55 | 55 |

IDE hard disk drive jumper settings

| Model number | Single drive | Master drive | Slave drive |
|------------------------|--------------|--------------|--------------|
| Conner CFS1275A | C/D jumpered | C/D jumpered | No jumpers |
| Conner CFS850A | C/D jumpered | C/D jumpered | No jumpers |
| Conner CFS540A | C/D jumpered | C/D jumpered | No jumpers |
| Conner CFS425A | C/D jumpered | C/D jumpered | No jumpers |
| Conner CFS420A | CID jumpered | C/D jumpered | No jumpers |
| Conner CFS270A | CID jumpered | C/D jumpered | No jumpers |
| Western Digital AC2540 | No jumpers | 5-6 jumpered | 3-4 jumpered |
| Western Digital AC2420 | No Jumpers | 5-6 jumpered | 3-4 jumpered |
| Western Digital AC2340 | No jumpers | 5-6 jumpered | 3-4 jumpered |
| Western Digital AC2250 | No jumpers | 5-6 jumpered | 3-4 jumpered |

DMA Assignments

| Level | Assigned device |
|-------|---------------------------|
| DMA0 | Reserved |
| DMA1 | Available |
| DMA2 | Diskette drive controller |
| DMA3 | Available |
| DMA4 | Cascade from DMA1 to DMA2 |
| DMA5 | Spare |
| DMA6 | Spare |
| DMA7 | Spare |

Hardware Interrupts

| IRQ no. | Function |
|---------|---------------------------|
| IRQ0 | Timer output 0 |
| IRQ1 | Keyboard |
| IRQ2 | Cascade to IRQ9 |
| IRQ3 | Serial port 2 |
| IRQ4 | Serial port 1 |
| IRQ5 | Available |
| IRQ6 | Diskette drive controller |
| IRQ7 | Parallel port 1 |
| IRQ8 | Real-time clock |
| IRQ9 | Available |
| IRQ10 | Available |
| IRQ11 | Available |
| IRQ12 | PS/2 mouse |
| IRQ13 | Math coprocessor |
| IRQ14 | Primary IDE controller |
| IRQ15 | Secondary IDE controller |

System Memory Map

| Address range | Function |
|------------------|--|
| FE0000h-FFFFFFh | 128KB duplication of ROM BIOS stored at 0E0000h-0FFFFFFh |
| 100000h-FDFFFFh | System extended memory (128MB maximum) |
| 0E0000h-0FFFFFFh | 128KB ROM BIOS |
| 0C8000h-0DFFFFh | Adapter ROM BIOS |
| 0C0000h-0C7FFFh | Video ROM BIOS |
| 0A0000h-0BFFFFh | 128KB video memory |
| 000000h-09FFFFh | 640KB base memory |

System I/O Address Map

| Hex address | Assigned device |
|------------------|--|
| 000-01F | DMA controller 1, 8237 |
| 020-03F | Interrupt controller 1, 8259 |
| 022-024 | Reserved |
| 040-05F | Timer, 8254 |
| 060-06F | Keyboard controller, 8242PE |
| 070-07F | Real-time clock NMI (non-maskable Interrupt) |
| 080-09F | DMA page register, 74LS612 |
| 0A0-0BF | Interrupt controller 2, 8259 |
| 0C0-0DF | DMA controller 2, 8237 |
| 0F0 | Clear math coprocessor |
| 0F1 | Reset math coprocessor |
| 0F8-0FF | Math coprocessor |
| 1F0-1F8 | Primary hard disk Interface |
| 1E0-1E7 | Secondary hard disk Interface |
| 200-207 | Game I/O |
| 278- 27F | Parallel printer port 2 |
| 2B0-2DF | Alternate enhanced graphics adapter |
| 2E1 | GPiB (adapter 0) |
| 2E2, 2E3 | Data acquisition (adapter 0) |
| 2F8-2FF | Serial port 2 |
| 300-31F | Prototype card |
| 360-363 | Available |
| 368-36B | Available |
| 378-37F | Parallel printer port 1 |
| 380-38F | Available |
| 390-393 | Available |
| 3A0-3AF | Available |
| 3B0-3BF | Available |
| 3C0-3CF | Available |
| 3D0-3DF | Available |
| 3F0-3F7 | Diskette drive controller |
| 3F8 -3FF | Serial port 1 |
| 6E2, 6E3 | Available |
| 790- 793 | Available |
| AE2, AE3 | Available |
| B90, B93 | Available |
| EE2, EE3 | Available |
| 1390-1393 | Available |
| 22E1 | Available |
| 2390-2393 | Available |
| 42E1 | Available |
| 63E1 | Available |
| 82E1 | Available |
| A2E1 | Available |
| C2E1 | Available |
| E2E1 | Available |

Connector Pin Assignments

Parallel port connector pin assignments (J6)

| Pin | Signal | Pin | Signal | Pin | Signal |
|-----|---------|-----|---------------|-----|---------------|
| 1 | Strobe* | 10 | ACK * | 19 | Signal ground |
| 2 | Data 0 | 11 | Busy | 20 | Signal ground |
| 3 | Data 1 | 12 | PE | 21 | Signal ground |
| 4 | Data 2 | 13 | Select | 22 | Signal ground |
| 5 | Data 3 | 14 | AFD * | 23 | Signal ground |
| 6 | Data 4 | 15 | Error * | 24 | Signal ground |
| 7 | Data 5 | 16 | Init * | 25 | Signal ground |
| 8 | Data 6 | 17 | Selectin * | | |
| 9 | Data 7 | 18 | Signal around | | |

* Active low logic

Serial port connector pin assignments (J4 and J5)

| Pin | Signal | Pin | Signal |
|-----|---------------------|-----|-----------------|
| 1 | Data carrier detect | 6 | Data set ready |
| 2 | Receive data | 7 | Request to send |
| 3 | Transmit data | 8 | Clear to send |
| 4 | Data terminal ready | 9 | Ring indicator |
| 5 | Ground | | |

Keyboard and mouse connector pin assignments (J1 and J3)

| Pin | Signal | Pin | Signal |
|-----|--------|-----|--------|
| 1 | Data | 4 | Vcc |
| 2 | NC | 5 | Clock |
| 3 | Ground | 6 | NC |

VGA port connector pin assignments (J7)

| Pin | Signal | Pin | Signal | Pin | Signal |
|-----|--------|-----|--------------|-----|-----------------|
| 1 | Red | 6 | Red ground | 11 | NC |
| 2 | Green | 7 | Green ground | 12 | Monitor detect |
| 3 | Blue | 8 | Blue ground | 13 | Horizontal sync |
| 4 | NC | 9 | NC | 14 | Vertical sync |
| 5 | Ground | 10 | Ground | 15 | NC |

LED connector pin assignments (J21)

| Pin | Signal | Pin | Signal |
|-----|-------------------------|-----|--------------------|
| 1 | NC | 11 | Power LED (yellow) |
| 2 | Turbo LED (yellow) | 12 | NC |
| 3 | Turbo LED (white) | 13 | Power LED (white) |
| 4 | NC | 14 | NC |
| 5 | NC | 15 | NC |
| 6 | NC | 16 | NC |
| 7 | NC | 17 | Speaker (red) |
| 8 | NC | 18 | NC |
| 9 | Hardware reset (white) | 19 | NC |
| 10 | Hardware reset (yellow) | 20 | Speaker (black) |

HDD LED connector pin assignments (J15)

| Pin | Signal | Pin | Signal |
|-----|--------|-----|--------|
| 1 | Red | 2 | White |

Power supply connector pin assignments (J9)

| Pin | Signal | Pin | Signal |
|-----|------------|-----|--------|
| 1 | Power good | 7 | Ground |
| 2 | +5 VDC | 8 | Ground |
| 3 | +12 VDC | 9 | -5 VDC |
| 4 | -12 VDC | 10 | +5 VDC |
| 5 | Ground | 11 | +5 VDC |
| 6 | Ground | 12 | +5 VDC |

Diskette drive connector pin assignments (J12)

| Pin* | Signal | Pin* | Signal |
|------|-----------|------|-----------------|
| 2 | NC | 20 | Step |
| 4 | NC | 22 | Write data |
| 6 | NC | 24 | Write enable |
| 8 | Index | 26 | Track 0 |
| 10 | Motor A | 28 | Write protect |
| 12 | Drive B | 30 | Read data |
| 14 | Drive A | 32 | Select header 0 |
| 16 | Motor B | 34 | Disk change |
| 18 | Direction | | |

* All odd-numbered pins are grounds

IDE drive connector pin assignments (J13 and J14)

| Pin | Signal | Pin | Signal | Pin | Signal |
|-----|--------|-----|----------|-----|---------|
| 1 | RESET* | 15 | D1 | 29 | NC |
| 2 | Ground | 16 | D14 | 30 | Ground |
| 3 | D7 | 17 | D0 | 31 | IRQ14 |
| 4 | D8 | 18 | D15 | 32 | IOCS16* |
| 5 | D6 | 19 | Ground | 33 | A1 |
| 6 | D9 | 20 | NC | 34 | NC |
| 7 | D5 | 21 | NC | 35 | A0 |
| 8 | D10 | 22 | Ground | 36 | A2 |
| 9 | D4 | 23 | IOW* | 37 | CS0* |
| 10 | D11 | 24 | Ground | 38 | CS1* |
| 11 | D3 | 25 | IOR* | 39 | Active* |
| 12 | D12 | 26 | Ground | 40 | Ground |
| 13 | D2 | 27 | IOCHRDY* | | |
| 14 | D13 | 28 | BALE | | |

*Active low logic

Option card riser board connector pin assignments

| Pin | Signal | Pin | Signal | Pin | Signal | Pin | Signal |
|-----|---------|-----|--------|-----|----------|-----|----------|
| A1 | +12 VDC | A31 | SA3 | B1 | +12 VDC | B31 | BALE |
| A2 | Ground | A32 | SA2 | B2 | +5 VDC | B32 | +5 VDC |
| A3 | Ground | A33 | SA1 | B3 | Ground | B33 | OSC |
| A4 | IOCHCK* | A34 | SA0 | B4 | Ground | B34 | Ground |
| A5 | SD7 | A35 | Ground | B5 | RESETDRV | B35 | Ground |
| A6 | SD6 | A36 | Ground | B6 | +5 VDC | B36 | +5 VDC |
| A7 | SD5 | A37 | +5 VDC | B7 | IRQ9 | B37 | +5 VDC |
| A8 | SD4 | A38 | SBHE* | B8 | 5 VDC | B38 | MEMCS16* |
| A9 | SD3 | A39 | LA23 | B9 | DRQ2 | B39 | IOCS16* |
| A10 | SD2 | A40 | LA22 | B10 | 12 VDC | B40 | IRQ10 |
| A11 | SD1 | A41 | LA21 | B11 | OWS* | B41 | IRQ11 |
| A12 | SD0 | A42 | LA20 | B12 | +12 VDC | B42 | IRQ12 |
| A13 | IOCHRDY | A43 | LA19 | B13 | Ground | B43 | IRQ15 |
| A14 | AEN | A44 | LA18 | B14 | SMEMW* | B44 | IRQ14 |
| A15 | SA19 | A45 | LA17 | B15 | SMEMR* | B45 | DACK0* |
| A16 | SA18 | A46 | MEMR* | B16 | IOW* | B46 | DRQ0 |
| A17 | SA17 | A47 | MEMW* | B17 | IOR* | B47 | DACK5* |
| A18 | SA16 | A48 | SD8 | B18 | DACK3* | B48 | DRQ5 |
| A19 | SA15 | A49 | SD9 | B19 | DRQ3 | B49 | DACK6* |
| A20 | SA14 | A50 | SD10 | B20 | DACK1* | B50 | DRQ6 |
| A21 | SA13 | A51 | SD11 | B21 | DRQ1 | B51 | DACK7* |
| A22 | SA12 | A52 | SD12 | B22 | REFRESH* | B52 | DRQ7 |
| A23 | SA11 | A53 | SD13 | B23 | SYSCLK | B53 | +5 VDC |
| A24 | SA10 | A54 | SD14 | B24 | IRQ7 | B54 | MASTER* |
| A25 | SA9 | A55 | SD15 | B25 | IRQ6 | B55 | Ground |
| A26 | SA8 | A56 | Ground | B26 | IRQ5 | B56 | Ground |
| A27 | SA7 | A57 | Ground | B27 | IRQ4 | B57 | Ground |
| A28 | SA6 | A58 | Ground | B28 | IRQ3 | B58 | +5 VDC |
| A29 | SA5 | A59 | +5 VDC | B29 | DACK2* | B59 | +5 VDC |
| A30 | SA4 | A60 | +5 VDC | B30 | TC | B60 | +5 VDC |

* Active low logic

ISA option slot connector pin assignments

| Pin | Signal | Pin | Signal | Pin | Signal | Pin | Signal |
|-----|---------|-----|----------|-----|--------|-----|----------|
| A1 | IOCHCK* | A26 | SA5 | B20 | SYSCLK | C14 | SD11 |
| A2 | SD7 | A27 | SA4 | B21 | IRQ7 | C15 | SD12 |
| A3 | SD6 | A28 | SA3 | B22 | IRQ6 | C16 | SD13 |
| A4 | SD5 | A29 | SA2 | B23 | IRQ5 | C17 | SD14 |
| A5 | SD4 | A30 | SA1 | B24 | IRQ4 | C18 | SD15 |
| A6 | SD3 | A31 | SA0 | B25 | IRQ3 | D1 | Memcs16* |
| A7 | SD2 | B1 | Ground | B26 | DACK2* | D2 | IOCS16* |
| A8 | SD1 | B2 | RESETDRV | B27 | T/C | D3 | IRQ10 |
| A9 | SD0 | B3 | +5 VDC | B28 | BALE | D4 | IRQ11 |
| A10 | IORDY | B4 | IRQ9 | B29 | +5 VDC | D5 | IRQ12 |
| A11 | AEN | B5 | 5 VDC | B30 | OSC | D6 | IRQ15 |
| A12 | SA19 | B6 | DRQ2 | B31 | Ground | D7 | IRQ14 |
| A13 | SA18 | B7 | 12 VDC | C1 | SBHE* | D8 | DACK0* |
| A14 | SA17 | B8 | OWS* | C2 | SA23 | D9 | DREQ0 |
| A15 | SA16 | B9 | +12 VDC | C3 | SA22 | D10 | DACK5* |
| A16 | SA15 | B10 | Ground | C4 | SA21 | D11 | DREQ5 |
| A17 | SA14 | B11 | SMEMW* | C5 | SA20 | D12 | DACK6* |
| A18 | SA13 | B12 | SMEMR* | C6 | SA19 | D13 | DRQ6 |
| A19 | SA12 | B13 | IOW* | C7 | SA18 | D14 | DACK7* |
| A20 | SA11 | B14 | IOR* | C8 | SA17 | D15 | DREQ7 |
| A21 | SA10 | B15 | DACK3* | C9 | MEMR* | D16 | +5 VDC |
| A22 | SA9 | B16 | DREQ3 | C10 | MEMW* | D17 | MASTER* |
| A23 | SA8 | B17 | DACK1* | C11 | SD8 | D18 | Ground |
| A24 | SA7 | B18 | DREQ1 | C12 | SD9 | | |
| A25 | SA6 | B19 | REF* | C13 | SD10 | | |

* Active low logic

SIMM socket connector pin assignments

| Pin | Signal | Pin | Signal | Pin | Signal | Pin | Signal |
|-----|--------|-----|--------|-----|--------|-----|--------|
| 1 | Ground | 19 | NC | 37 | DP1 | 55 | DQ11 |
| 2 | DQ0 | 20 | DQ4 | 38 | DP3 | 56 | DQ27 |
| 3 | DQ16 | 21 | DQ20 | 39 | Ground | 57 | DQ12 |
| 4 | DQ1 | 22 | DQ5 | 40 | CAS0* | 58 | DQ28 |
| 5 | DQ17 | 23 | DQ21 | 41 | CAS2* | 59 | VCC |
| 6 | DQ2 | 24 | DQ6 | 42 | CAS3* | 60 | DQ29 |
| 7 | DQ18 | 25 | DQ22 | 43 | CAS1* | 61 | DQ13 |
| 8 | DQ3 | 26 | DQ7 | 44 | RAS0* | 62 | DQ30 |
| 9 | DQ19 | 27 | DQ23 | 45 | RAS1* | 63 | DQ14 |
| 10 | VCC | 28 | A7 | 46 | A10A | 64 | DQ31 |
| 11 | NC | 29 | NC | 47 | WE* | 65 | DQ15 |
| 12 | A0 | 30 | VCC | 48 | A10B | 66 | NC |
| 13 | A1 | 31 | A8 | 49 | DQ8 | 67 | PD1 |
| 14 | A2 | 32 | A9 | 50 | DQ24 | 68 | PD2 |
| 15 | A3 | 33 | RAS3* | 51 | DQ9 | 69 | PD3 |
| 16 | A4 | 34 | RAS2* | 52 | DQ25 | 70 | PD4 |
| 17 | A5 | 35 | DP2 | 53 | DQ10 | 71 | NC |
| 18 | A6 | 36 | DP0 | 54 | DQ26 | 72 | Ground |

* Active low logic

Tested Operating Environments

The following operating environments have been tested for compatibility with the system.

Microsoft® MS-DOS® 3.3 and later
Novell® DR DOS®
Novell NetWare®* 3.12 and 4.02
Novell Personal NetWare
IBM® OS/2® including version 3.0 (Warp)
SCO® UNIX®
SCO Open Desktop
Microsoft Windows 3.0 and later
Microsoft Windows for WorkGroups
Microsoft Windows NT, including version 3.5

* Certified as workstation; tested as file server

Your system has also received Novell's "Yes, NetWare tested and approved" certification as a workstation. As new environments become available, these also will be tested.

Installation/Support Tips

Installing Diskette Drives

- Make sure that the drive type has been correctly selected in the SETUP program.
- Make sure jumper JP2 is set to position 1-2 to enable the diskette drive controller.

Installing Hard Disk Drives

- If you are installing a drive that cannot use the embedded IDE interface (such as an ESDI drive), it is recommended that you use a 16-bit, AT-type hard disk controller. If you install a non-IDE hard disk drive and controller card, you must set jumper JP25 to on to disable the built-in IDE hard disk drive interface. Also, remove the hard disk drive ribbon connector from the system board.
- When installing a hard disk drive, use the auto-sensing feature in SETUP to select the correct type for the drive. If the auto-sensing feature does not produce a match for the drive, you can define your own drive type by selecting User as the type and entering the drive's parameters.

Software Problems

- When installing a copy-protected software package, first try the installation at high speed. If this does not work properly, select low speed by pressing Ctrl Alt - (on the numeric keypad). Try loading the program at low speed and then switching to high speed, if possible.
- When running a software package that uses a key disk as its copy-protection method, try loading it at high speed. If this does not work, load it at low speed.

Installing Option Cards

If you are installing a video adapter card, make sure you disable the built-in VGA controller by setting JP50 to 2-3.

Upgrading the Processor

When you replace the processor, you need to check the settings of several jumpers, as listed on page 3.

Booting Sequence

If you cannot boot the computer from the hard disk, make sure the booting sequence in SETUP is set to **A: then C :** Then boot the computer from a system diskette in drive A.

Password

If you forget your password, you must discharge your CMOS memory as follows:

1. Turn off the computer and remove the cover.
2. Disable the password by setting jumper JP49 on the main system board to on.
3. Turn the computer on, leave it on for a few seconds, then turn it off again.
4. Set jumper JP49 back to off to select the system board battery.
5. Run SETUP to enter a new password, if desired.

Information Reference List

Engineering Change Notices

None.

Technical Information Bulletins

None.

Product Support Bulletins

None.

Related Documentation

| | |
|------------------|--|
| TM-ACTPCT70 | EPSON ActionPC 7000, ActionTower 7000, Endeavor 486i Service Manual |
| PL-ACTPCT70 | EPSON ActionPC 7000, ActionTower 7000, Endeavor 486i Parts Price List |
| 400434800 | EPSON ActionPC 7000, ActionTower 7000 User's Guide EPSON Endeavor 486i User's Guide |