

### Ordering Information

Catalog No.	Finishes	Track Mounting	Lamp	Reflectors
<b>DR2LS70WH</b> <b>DR2LS70BK</b> <b>DR2LS70SL</b>	White Black Silver	Compatible with Lytespan Basic, Radius and Advent Track Systems; and all Multipoint and Monopoints. DO NOT USE with Extension Wands, Sloped Ceiling Adapter or ProSpec Track.	T6 Single Ended, G12 Base Ceramic Metal Halide 70W	Use one of: DRT6RS DRT6RM DRT6RF SOLD SEPARATELY

### Description

Remote controlled spotlight that can be mounted anywhere along the track and remotely aimed through the use of a hand-held controller. Can not be dimmed. Can not turn on/off using hand-held controller.

### Labels

cULus Classified

### Features


1. Full remote control of pan and tilt movement to aim at any object below the luminaire.
2. Positions can be recorded for future use.
3. Continuous movement and sequencing option.
4. Interchangeable Click-On™ reflectors to achieve desired beam spread.  
REFLECTORS SOLD SEPARATELY.
5. Die-cast aluminum housing.

### Electrical

Electronic Ballast  
**Input Voltage:** 120V, 60 Hz  
**Power Factor:** >95%  
**Input Power:** 78W  
**Max. Input Current:** .67A  
**Total Harmonic Distortion:** <10%  
**ANSI Code:** M139, M143, M98  
 Do not use on a dimming circuit.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

Lightolier a Genlyte company [www.lightolier.com](http://www.lightolier.com)  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2007 Genlyte Group LLC • B0507



## AIMING ANGLE


- L** Beam Length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

### Lamp Information:

70W T6 Clear Ceramic Metal Halide  
 Initial Lumens: 6600  
 CRI: 81  
 Rated Avg. Life: 9,000 to 15,000 hrs.

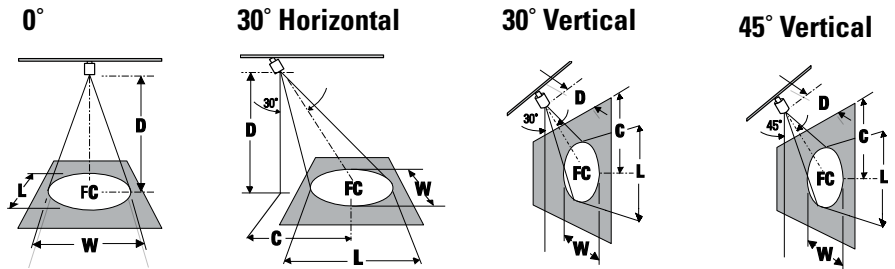

## AIMING ANGLE:

			0° Horizontal Aiming				30° Horizontal Aiming					30° Vertical Aiming					45° Vertical Aiming					
Beam Spread (To 50% CBCP)	CBCP		D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	
DRT6RS Spot Reflector 12° x 12°	23,234		8'	363	1.7'	1.7'	8'	4.6'	236	2.3'	1.9'	3'	5.2'	323	2.6'	1.3'	5'	5.0'	329	2.1'	1.5'	
			12'	161	2.5'	2.5'	12'	6.9'	105	3.4'	2.9'	4'	6.9'	182	3.5'	1.7'	6'	6.0'	228	2.6'	1.8'	
			16'	91	3.4'	3.4'	16'	9.2'	59	4.5'	3.9'	5'	8.7'	116	4.3'	2.1'	7'	7.0'	168	3.0'	2.1'	
			20'	58	4.2'	4.2'	20'	11.5'	38	5.6'	4.9'	6'	10.4'	81	5.2'	2.5'	8'	8.0'	128	3.4'	2.4'	
DRT6RM Med Flood Reflector 24° x 24°	16,934		8'	265	3.4'	3.4'	8'	4.6'	172	4.6'	3.9'	3'	5.2'	235	5.9'	2.6'	4'	4.0'	374	3.6'	2.4'	
			10'	169	4.3'	4.3'	10'	5.8'	110	5.8'	4.9'	4'	6.9'	132	7.9'	3.4'	5'	5.0'	239	4.5'	3.0'	
			12'	118	5.1'	5.1'	12'	6.9'	76	6.9'	5.9'	5'	8.7'	85	9.8'	4.3'	6'	6.0'	166	5.3'	3.6'	
			14'	86	6.0'	6.0'	14'	8.1'	56	8.1'	6.9'	6'	10.4'	59	11.8'	5.1'	7'	7.0'	122	6.2'	4.2'	
DRT6RF Flood Reflector 38° x 38°	29,483		8'	461	5.2'	5.2'	8'	4.6'	299	7.2'	6.0'	3'	5.2'	409	11.4'	3.9'	5'	5.0'	417	7.3'	4.6'	
			10'	295	6.5'	6.5'	10'	5.8'	191	9.0'	7.5'	4'	6.9'	230	15.2'	5.2'	6'	6.0'	290	8.7'	5.5'	
			12'	205	7.8'	7.8'	12'	6.9'	133	10.8'	9.0'	5'	8.7'	147	19.0'	6.5'	7'	7.0'	213	10.2'	6.4'	
			14'	150	9.1'	9.1'	14'	8.1'	98	12.6'	10.5'	6'	10.4'	102	22.8'	7.8'	8'	8.0'	163	11.6'	7.4'	

### Job Information

### Type:

Lightolier a Genlyte company [www.lightolier.com](http://www.lightolier.com)  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2007 Genlyte Group LLC • 80507