

Ordering Information

() Denotes dimensions in mm

| Catalog No. | Finishes | Track Mounting | Lamp | Reflectors |
|-------------------------------------|--------------------------|---|---|--|
| DR2LS35WH DR2LS35BK DR2LS35SL | White Black Silver | Compatible with Lytespan Basic, Radius and Advent Track Systems; and all Multipoint and Monopoints. DO NOT USE with Extension Wands, Sloped Ceiling Adapter or ProSpec Track. | T6 Single Ended, G12 Base Ceramic Metal Halide 39W | Use one of: DRT6RS DRT6RM DRT6RF SOLD SEPARATELY |

Description

Remote controlled spotlight that can be mounted anywhere along the track and remotely aimed through the use of a hand-held controller. Can not be dimmed. Can not turn on/off using hand-held controller.

Features

1. Full remote control of pan and tilt movement to aim at any object below the luminaire.
2. Positions can be recorded for future use.
3. Continuous movement and sequencing option.
4. Interchangeable Click-On™ reflectors to achieve desired beam spread. REFLECTORS SOLD SEPARATELY.
5. Die-cast aluminum housing.

Electrical


Electronic Ballast
Input Voltage: 120V, 60 Hz
Power Factor: >95%
Input Power: 44W
Max. Input Current: .37A
Total Harmonic Distortion: <10%
ANSI Code: M130
 Do not use on a dimming circuit.

Labels

cULus Classified

| Job Information | Type: |
|------------------|-------|
| Job Name: | |
| Cat. No.: | |
| Lamp(s): | |
| Notes: | |

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2007 Genlyte Group LLC • B0507



Lytespan® Track Lighting System **DRL35**

AIMING ANGLE


- L** Beam Length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

Lamp Information:

39W T6 Clear Ceramic Metal Halide
 Initial Lumens: 3300
 CRI: 81
 Rated Avg. Life: 9,000 to 12,000 hrs.

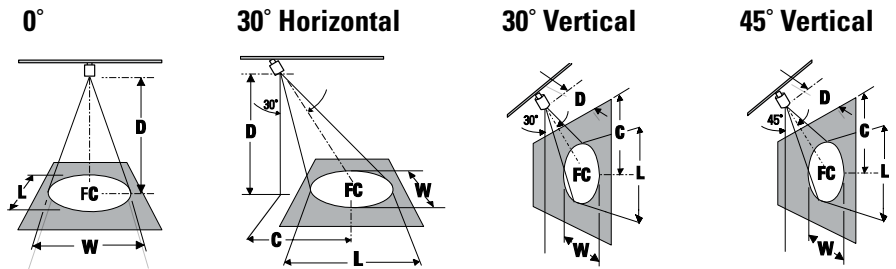

AIMING ANGLE:

| Beam Spread (To 50% CBCP) | CBCP | 0° Horizontal Aiming | | | | 30° Horizontal Aiming | | | | | 30° Vertical Aiming | | | | | 45° Vertical Aiming | | | | |
|---|--------|----------------------|-----|------|------|-----------------------|------|-----|-------|-------|---------------------|------|-----|-------|------|---------------------|------|-----|------|------|
| | | D | FC | L | W | D | C | FC | L | W | D | C | FC | L | W | D | C | FC | L | W |
| DRT6RS Spot Reflector 16° x 16° | 11,108 | 8' | 174 | 2.2' | 2.2' | 8' | 4.6' | 113 | 3.0' | 2.6' | 2' | 3.5' | 347 | 2.4' | 1.1' | 3' | 3.0' | 436 | 1.7' | 1.2' |
| | | 10' | 111 | 2.8' | 2.8' | 10' | 5.8' | 72 | 3.8' | 3.2' | 3' | 5.2' | 154 | 3.6' | 1.7' | 4' | 4.0' | 245 | 2.3' | 1.6' |
| | | 12' | 77 | 3.4' | 3.4' | 12' | 6.9' | 50 | 4.5' | 3.9' | 4' | 6.9' | 87 | 4.8' | 2.2' | 5' | 5.0' | 157 | 2.9' | 2.0' |
| | | 14' | 57 | 3.9' | 3.9' | 14' | 8.1' | 37 | 5.3' | 4.5' | 5' | 8.7' | 56 | 6.0' | 2.8' | 6' | 6.0' | 109 | 3.4' | 2.4' |
| DRT6RM Med Flood Reflector 24° x 24° | 7,712 | 6' | 214 | 2.6' | 2.6' | 6' | 3.5' | 139 | 3.5' | 2.9' | 2' | 3.5' | 241 | 3.9' | 1.7' | 3' | 3.0' | 306 | 2.7' | 1.8' |
| | | 8' | 121 | 3.4' | 3.4' | 8' | 4.6' | 78 | 4.6' | 3.9' | 3' | 5.2' | 107 | 5.9' | 2.6' | 4' | 4.0' | 172 | 3.6' | 2.4' |
| | | 10' | 77 | 4.3' | 4.3' | 10' | 5.8' | 50 | 5.8' | 4.9' | 4' | 6.9' | 60 | 7.9' | 3.4' | 5' | 5.0' | 110 | 4.5' | 3.0' |
| | | 12' | 54 | 5.1' | 5.1' | 12' | 6.9' | 35 | 6.9' | 5.9' | 5' | 8.7' | 39 | 9.8' | 4.3' | 6' | 6.0' | 76 | 5.3' | 3.6' |
| DRT6RF Flood Reflector 38° x 38° | 7,779 | 6' | 216 | 3.9' | 3.9' | 8' | 4.6' | 79 | 7.2' | 6.0' | 2' | 3.5' | 243 | 7.6' | 2.6' | 3' | 3.0' | 306 | 4.4' | 2.8' |
| | | 8' | 122 | 5.2' | 5.2' | 10' | 5.8' | 51 | 9.0' | 7.5' | 3' | 5.2' | 108 | 11.4' | 3.9' | 4' | 4.0' | 172 | 5.8' | 3.7' |
| | | 10' | 78 | 6.5' | 6.5' | 12' | 6.9' | 35 | 10.8' | 9.0' | 4' | 6.9' | 61 | 15.2' | 5.2' | 5' | 5.0' | 110 | 7.3' | 4.6' |
| | | 12' | 54 | 7.8' | 7.8' | 14' | 8.1' | 26 | 12.6' | 10.5' | 5' | 8.7' | 39 | 19.0' | 6.5' | 6' | 6.0' | 76 | 8.7' | 5.5' |

Job Information

Type:

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2007 Genlyte Group LLC • 80507